



Dreamax DMX-ST7A Battery Replacement

Removing the old battery to replace it with a new one.

Written By: Stacey Mattila



INTRODUCTION

We will show how to replace the tablet's battery.



TOOLS:

- [Solder](#) (1)
 - [Portable Soldering Iron](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Back Cover



- Position the tablet so the ports and screws are facing you.

Step 2



- Remove the two 2.5mm screws using the Phillips #00 precision screwdriver.

Step 3




- Use the plastic opening tool to assist in removing the back cover.

Step 4





- Upon removing the back cover position the tablet as seen in the picture.

Step 5 — Battery

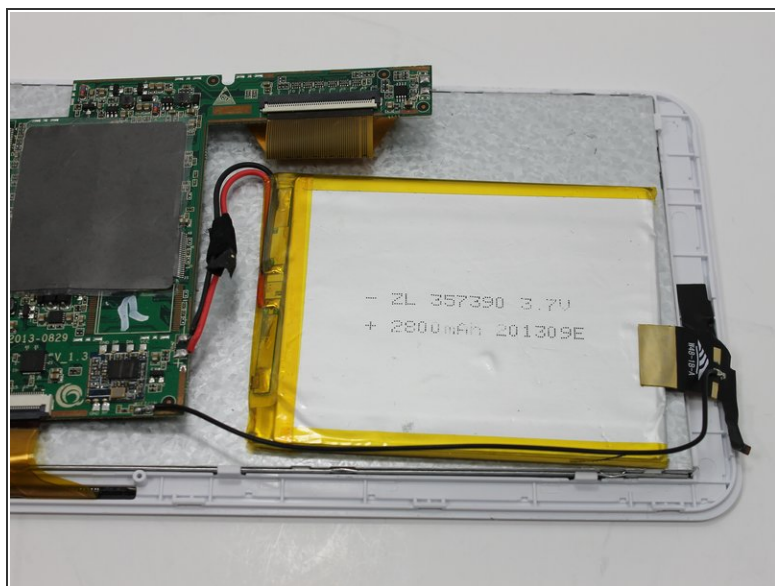


- Remove any tape that might be holding the wires in place.

Step 6

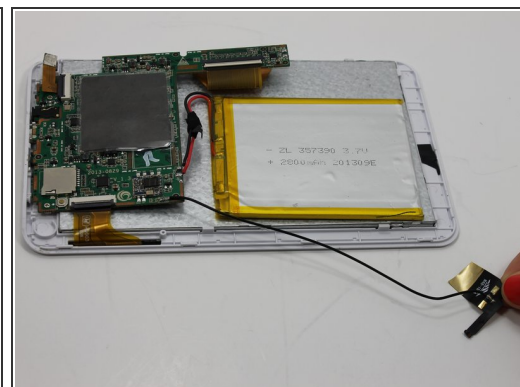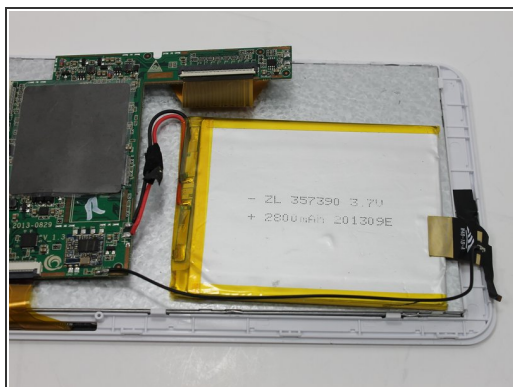

- Remove the black and gold tab connecting the battery to the tablet's frame.

Step 7

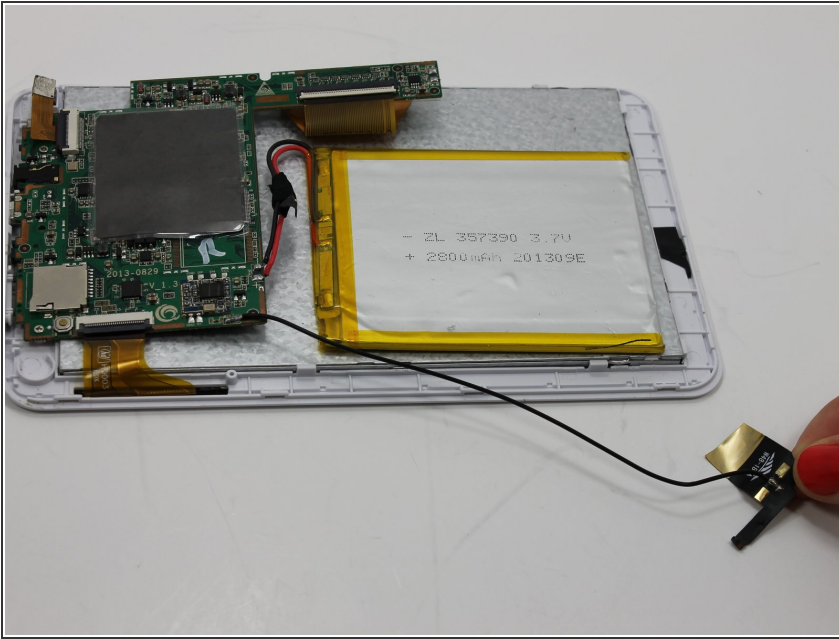


- Remove the the one red and two black wires that connect the battery to the motherboard.

Step 8



- Remove the battery from the tablet.

Step 9

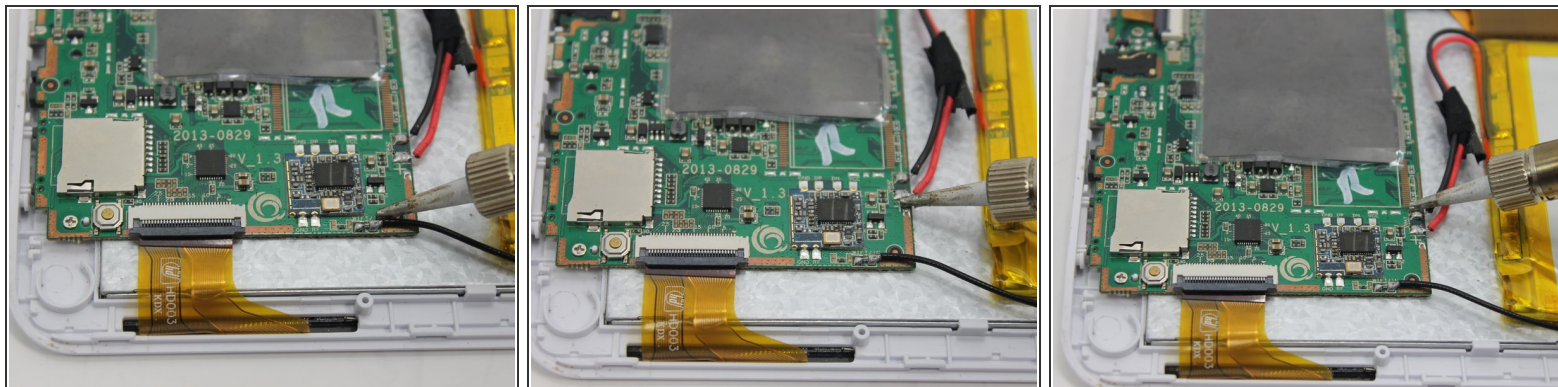

- Install the new battery by soldering the three wires to the motherboard. For additional soldering instructions please view this page: [How To Solder and Desolder Connections](#)

To reassemble your device, follow these instructions in reverse order.