



Trio Stealth Pro 9.7" Speaker Replacement

A step by step guide showing how to replace a Trio Stealth Pro 9.7" speaker.

Written By: Edward Insogna



 **TOOLS:**



- [Essential Electronics Toolkit](#) (1)
 - [Flush Wire Cutters](#) (1)
 - [Soldering Iron](#) (1)
-

Step 1 — Speaker





- Remove 2 black 4 cm screws on either side of the bottom of the device.

Step 2

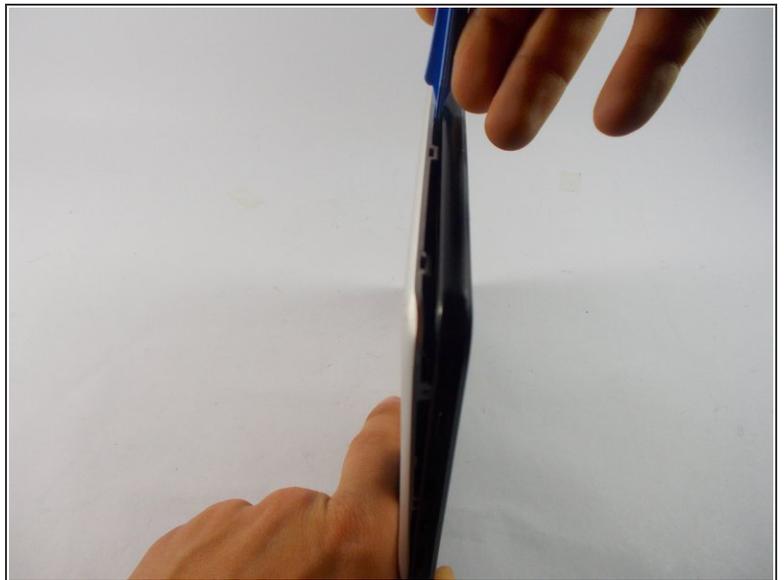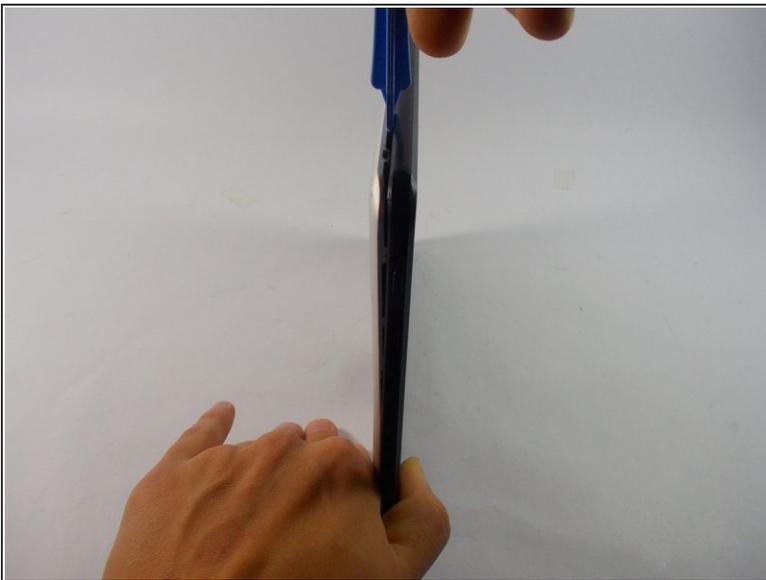



- Use the plastic opening tools and the spudger around the outside of silver metal back plate on the device to pry off the back plate.

Step 3

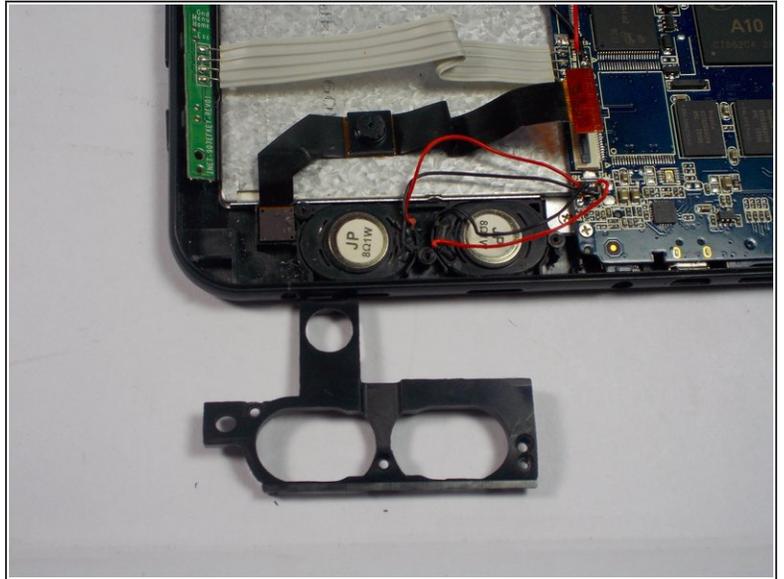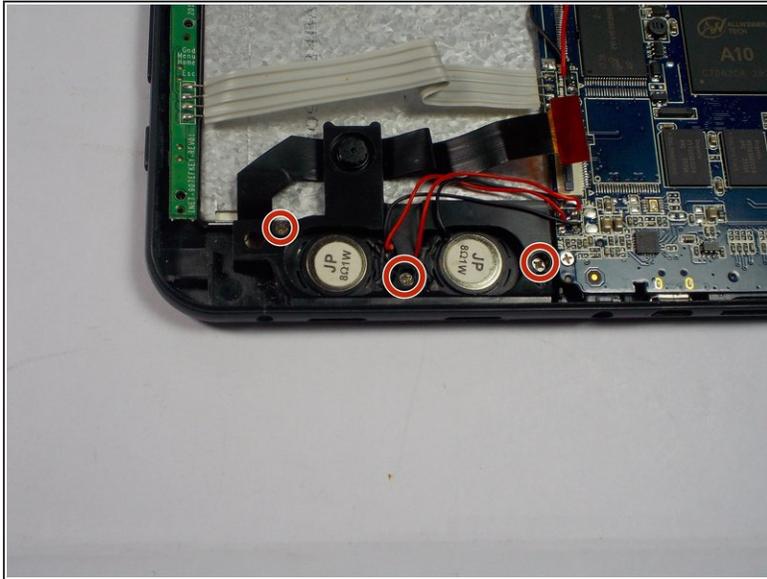

- Remove 3 silver 4 cm Phillips screws holding down plastic speaker cover.
- Remove plastic cover.

Step 4

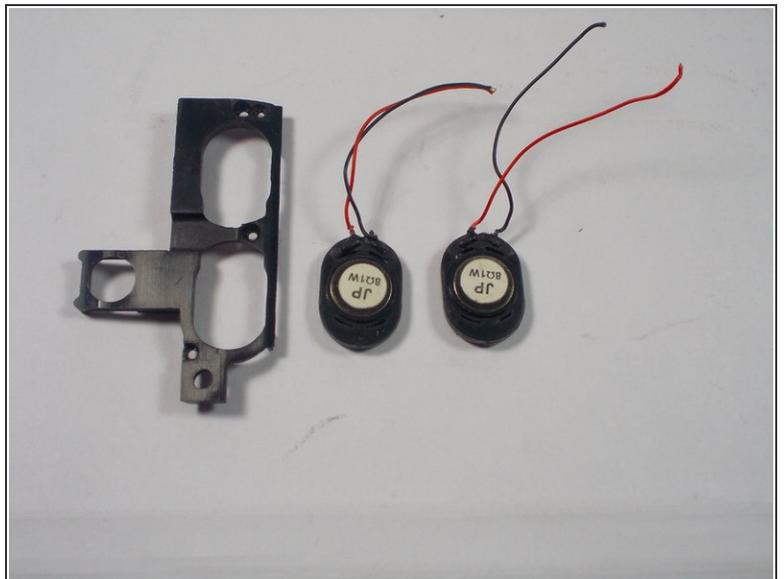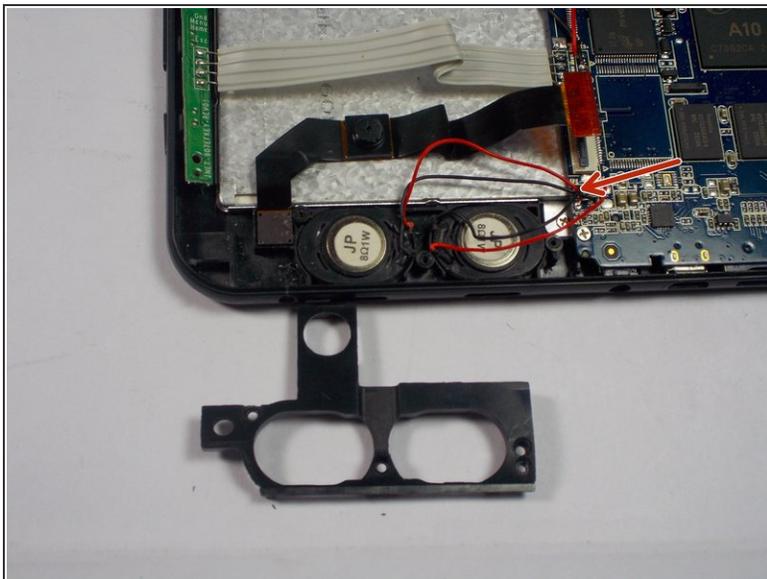

- Cut 2 red and 2 black wires connecting speakers to the motherboard.
- Remove speakers.

To reassemble your device, follow these instructions in reverse order.