



Trio Stealth Pro 9.7" Rear/Front Camera Replacement

A step-by-step guide on how to replace a Trio Stealth Pro 9.7" front and rear camera.

Written By: Edward Insogna





TOOLS:



- [Essential Electronics Toolkit](#) (1)
-

Step 1 — Rear/Front Camera




- Remove 2 black 4 cm Phillips screws on either side of the bottom of the device.

Step 2

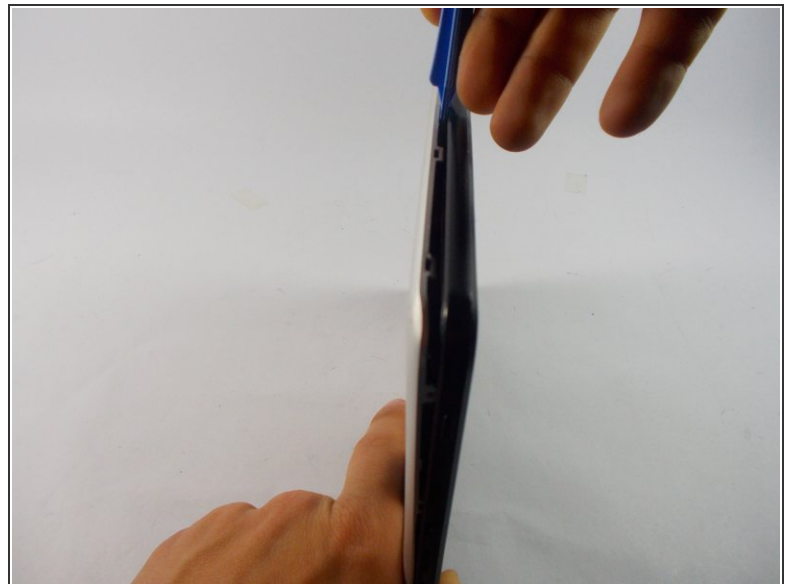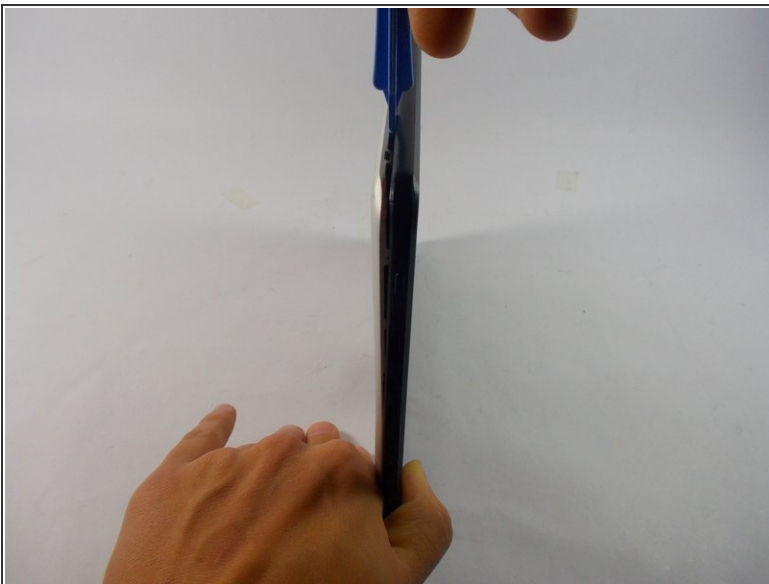


- Use the plastic opening tools and the spudger around the outside of silver metal back plate on the device to pry off the back plate.

Step 3

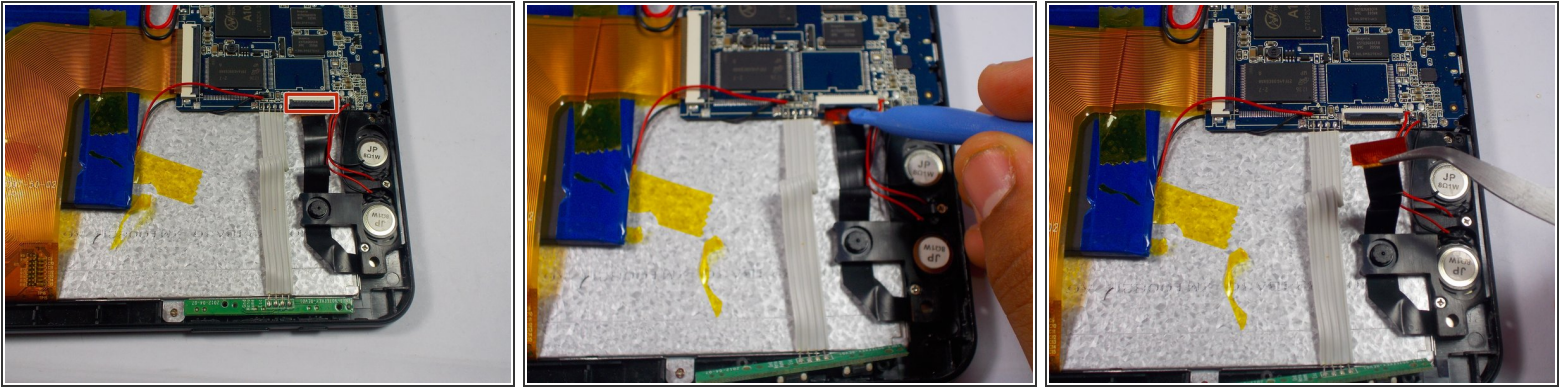


- Use plastic opening tool to lift up black clip.
- Gently pull out flex cable.

Step 4

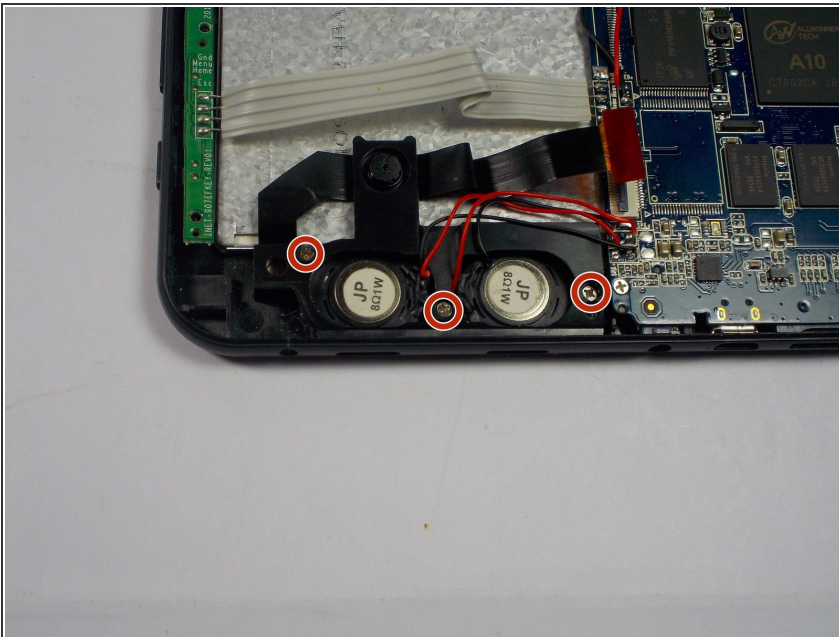

- Remove 3 silver 4 cm Phillips screws holding down black plastic speaker cover.
- Gently pull up on plastic to uncover clip connected to the camera.

Step 5

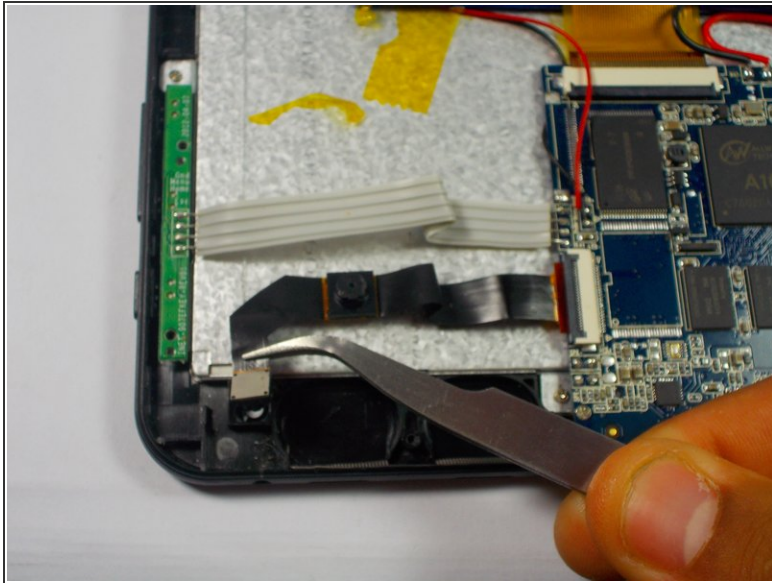

- Use the tweezers and gently lift up on the clip.
- Remove the front/rear camera.

To reassemble your device, follow these instructions in reverse order.