



# Trio Stealth Pro 9.7" Battery Replacement

A step by step guide on how to replace a Trio Stealth Pro 9.7" battery.

Written By: Edward Insogna





## TOOLS:



- [iFixit Opening Tools](#) (1)
  - [Spudger](#) (1)
-

## Step 1 — Battery



- Remove 2 black 4 cm Phillips screws on either side of the bottom of the device.


## Step 2

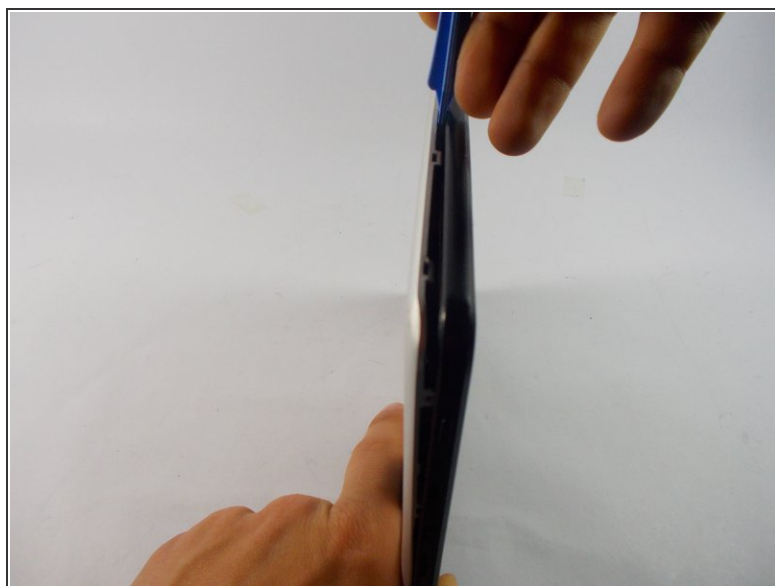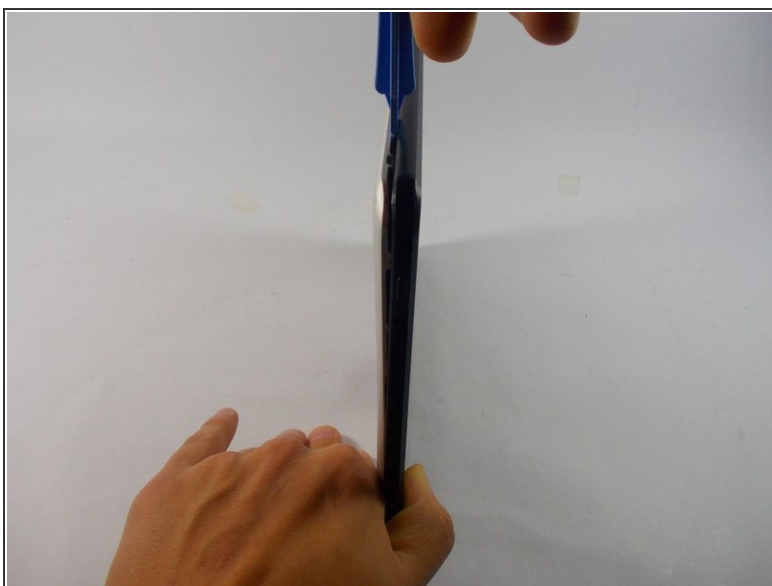

- Use the plastic opening tools and the spudger around the outside of silver metal back plate on the device to pry off the back plate.




### Step 3

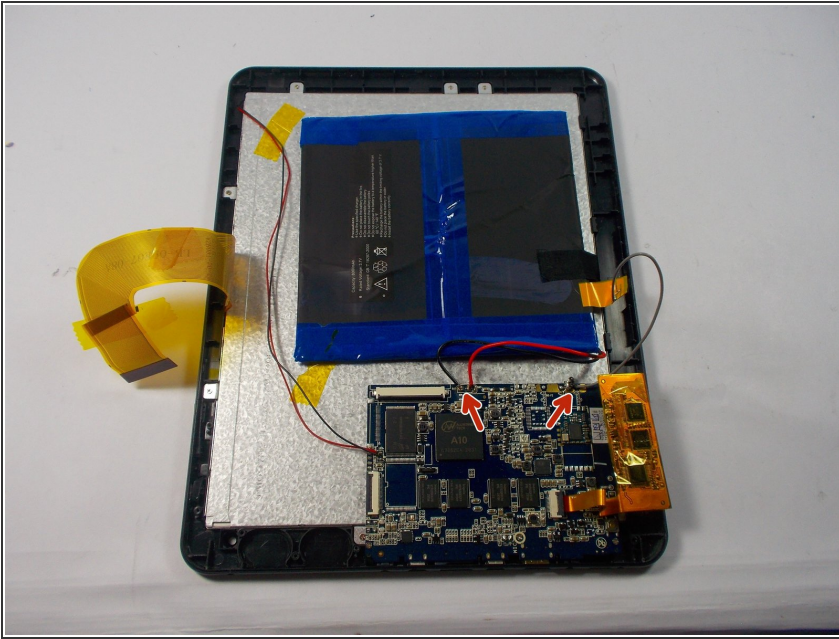


- Cut red, black, and gray wires connecting the battery to the motherboard.

### Step 4

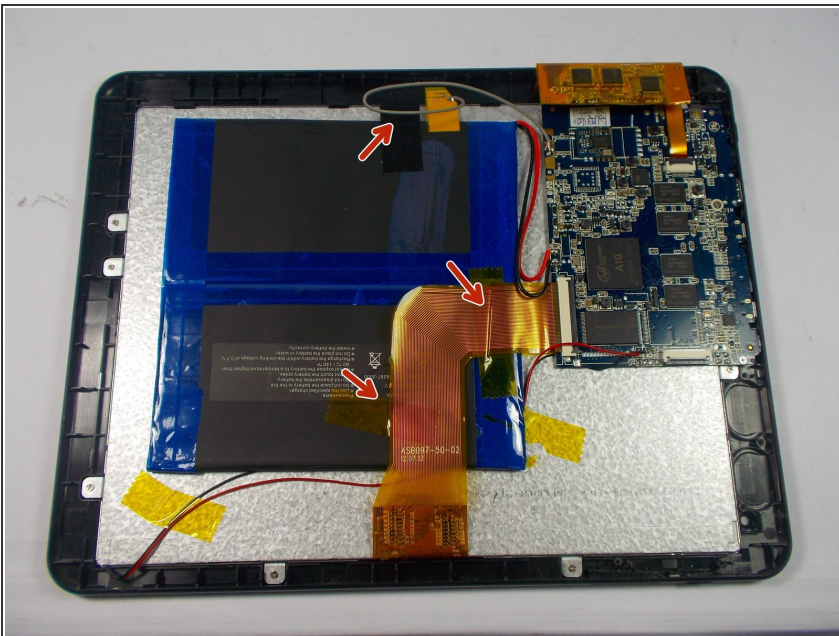

- Remove tape on top of battery.

## Step 5

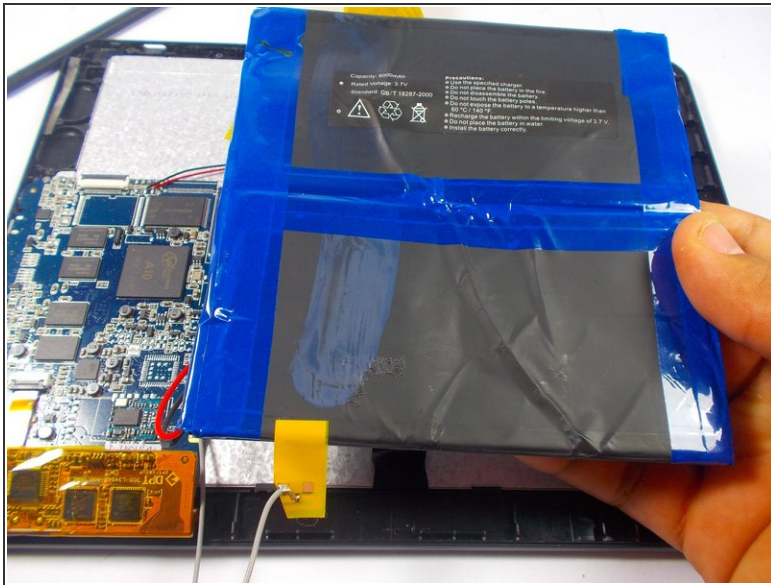

- Use the plastic opening tool and the spudger to pry up and remove the battery.

To reassemble your device, follow these instructions in reverse order.