




# Xelio P900A-BK Battery Replacement

How to replace the battery in your Xelio P900A-BK tablet.

Written By: Marcus Nelson

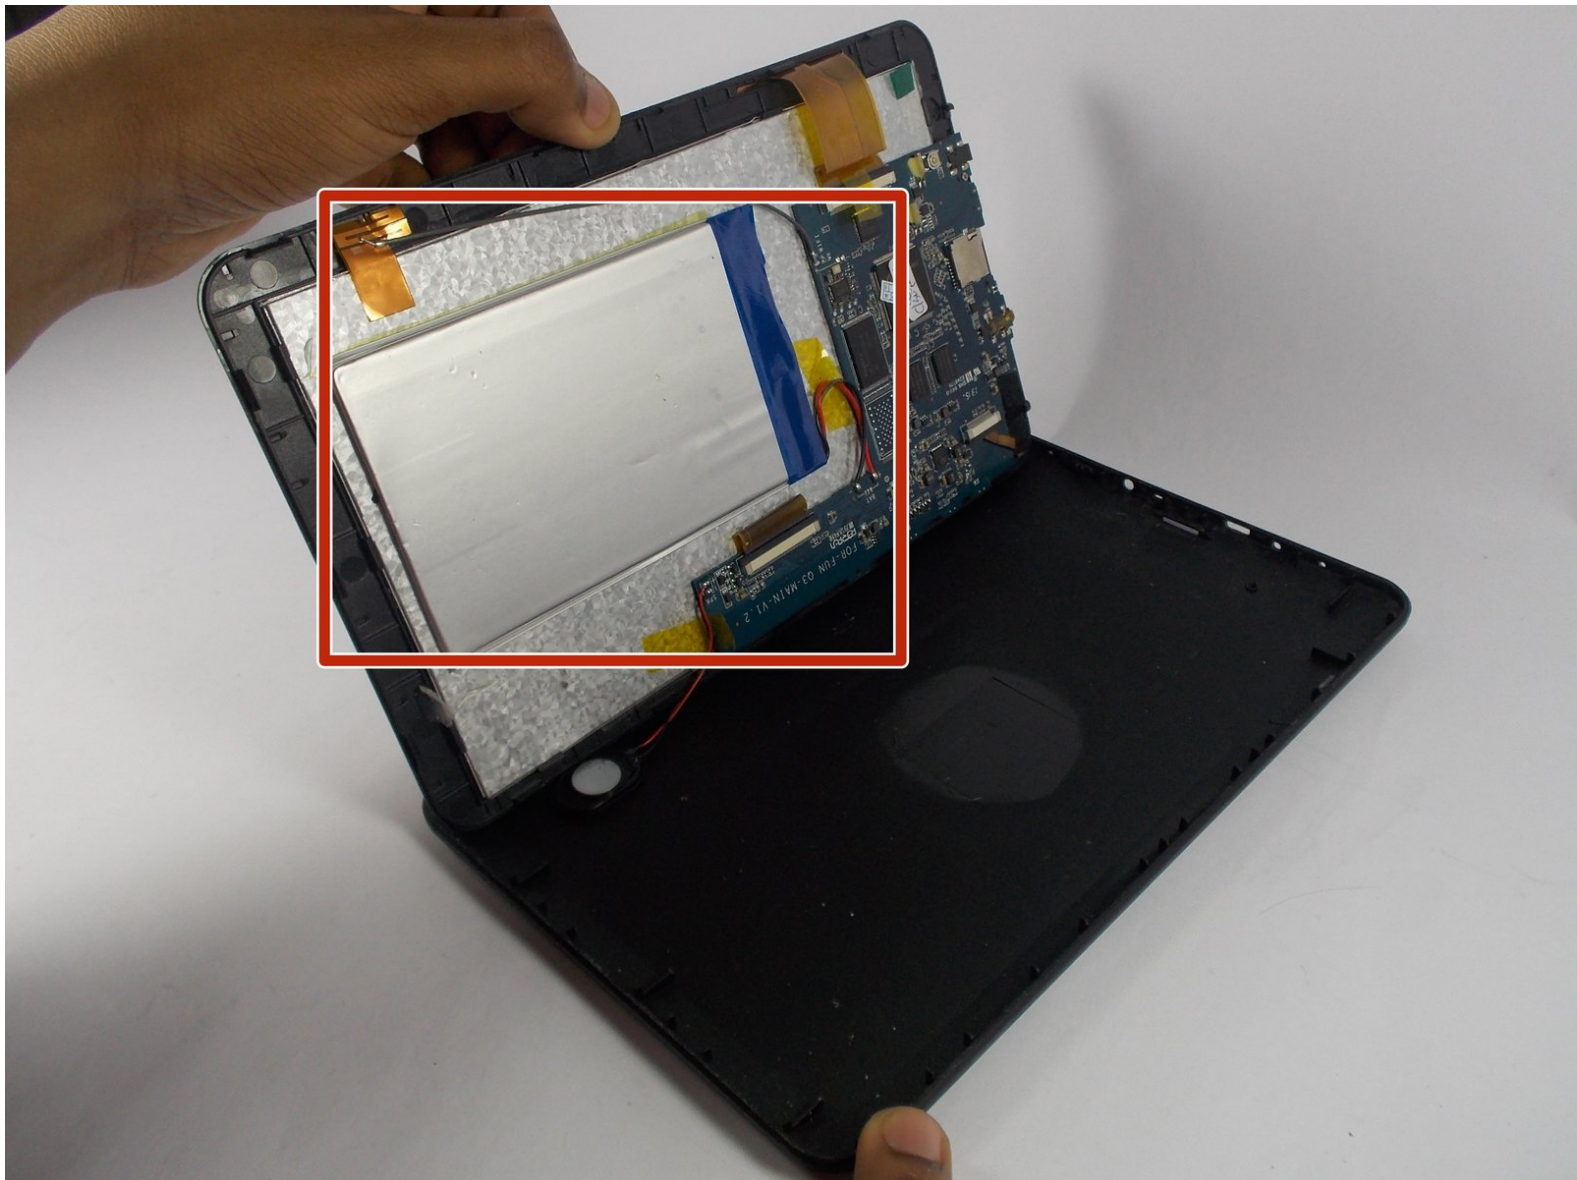

# INTRODUCTION

Use this guide to remove and replace a dead battery in the Xelio P900A-BK tablet.



## TOOLS:


- [4mm Nut Driver](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [Spudger](#) (1)
  - [Magnetic Project Mat](#) (1)
  - [Phillips #00 Screwdriver](#) (1)
-

## Step 1 — Battery



- Using a #00 Phillips head screwdriver, remove the two 5.4mm bottom screws.

## Step 2

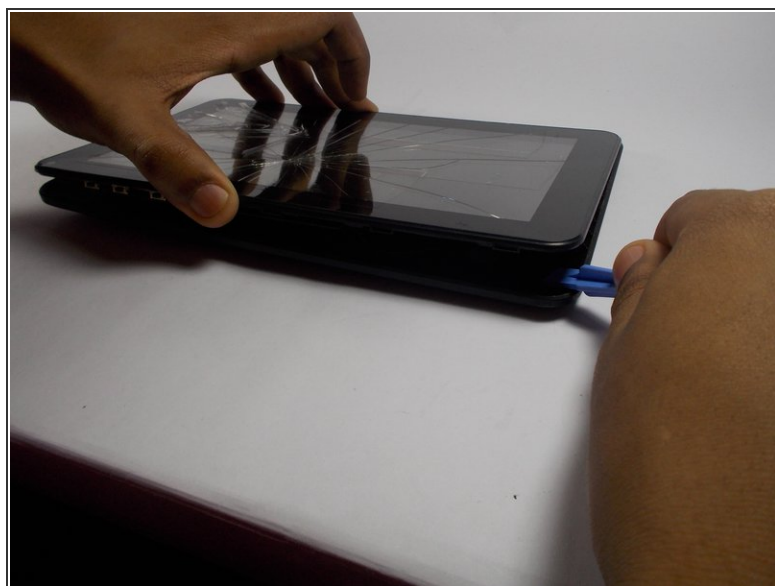

- Insert a plastic opening tool between the screen and the rear case and gently work your way around the tablet.






## Step 3





- Using the plastic opening tool or your fingers, gently pry the pieces of the tablet apart. You will hear the plastic latches pop free.

## Step 4

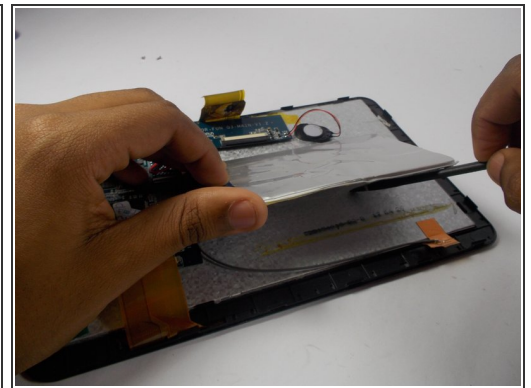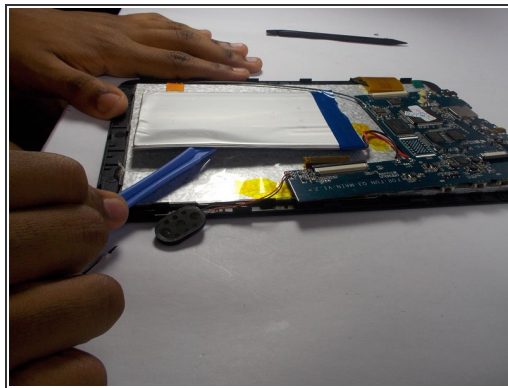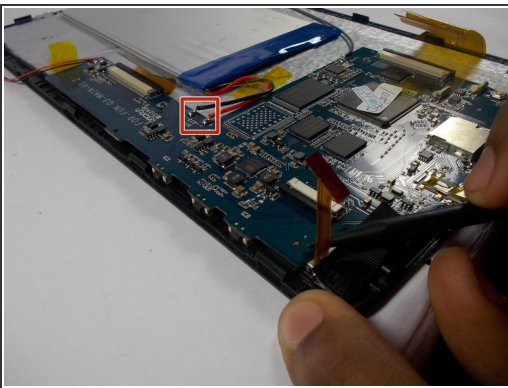

- Desolder the red and black battery cables from the motherboard.
  - ⓘ Check out this guide for tips on [How To Solder and Desolder Connections](#).

## Step 5

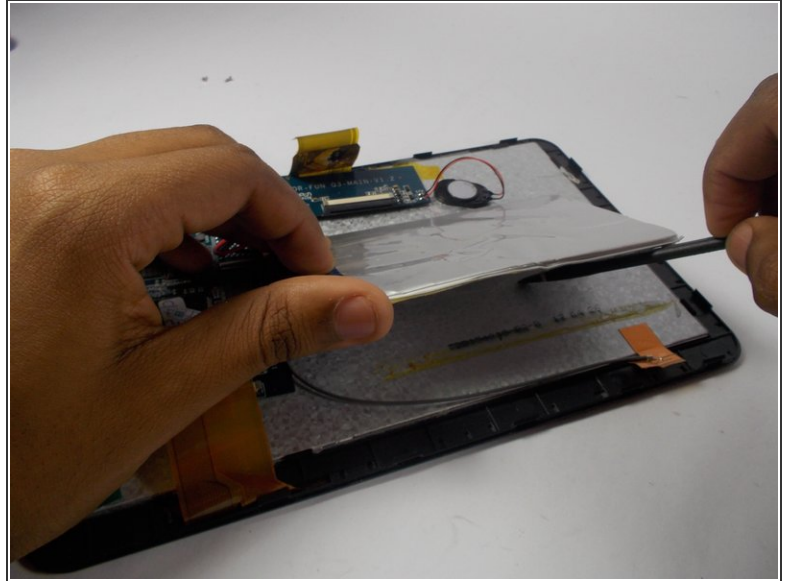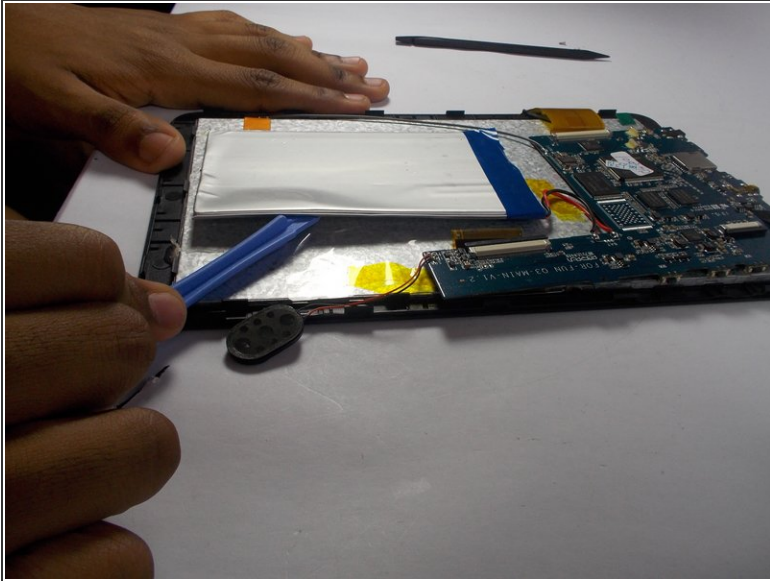

- Carefully insert the flat end of a nylon spudger under the battery, and pry the battery up and away from the tablet casing.
- ⓘ A small amount of heat may be required to safely remove the battery from the adhesive underneath. Use an iOpener or heat gun to soften the adhesive.
- ⚠ Do not bend or puncture the battery.

## Step 6



- Place the new battery in the same place as the old one, making sure it is oriented the same way as the old one was.

To reassemble your device, follow these instructions in reverse order.