



Lenovo Miix 2 Battery Replacement

Replace the battery in your Lenovo Miix 2

Written By: Nicolas Jones




INTRODUCTION

This guide explains how to quickly open the back case of the Miix 2 using spudgers and a screwdriver.

TOOLS:


- [Metal Spudger](#) (1)
 - [Spudger](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Battery

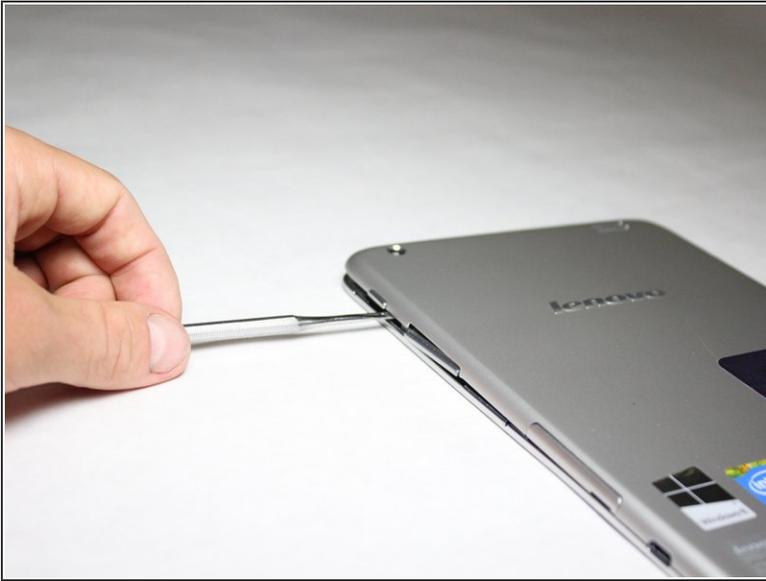

- Remove the back cover of the tablet by inserting a nylon or metal spudger in the small hole between the screen and rear cover near the volume button. Slide the tool along the edge of the tablet to release the internal clasps.
- ⓘ You should have to apply a good amount of force, but pry carefully in order to avoid damaging the clasps or the internals.

Step 2

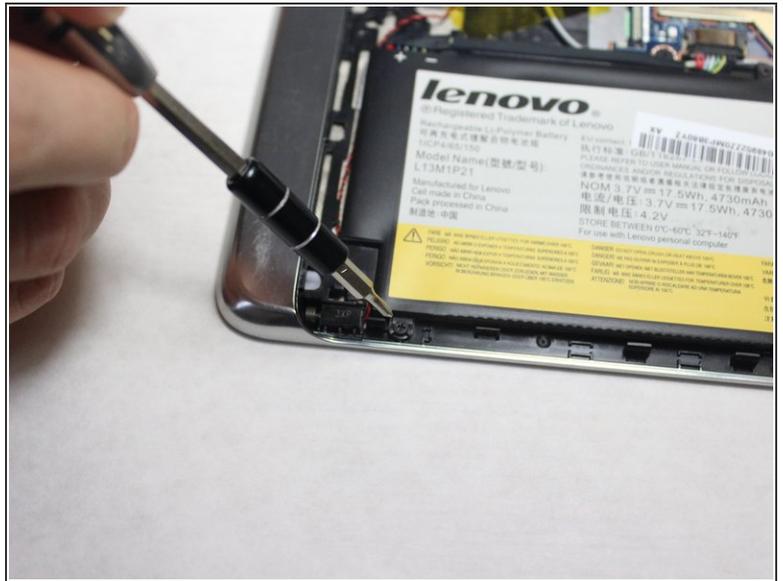

- Unscrew the six 3mm screws surrounding the battery dock using a Phillips #0 screwdriver.

Step 3



- Using a plastic spudger, slowly push each side of the battery connector (back and forward a couple of times) out of its socket on the motherboard.

Step 4



- Remove the battery by prying up with your fingers or a plastic opening tool.

To reassemble your device, follow these instructions in reverse order.