


2013 Subaru Impreza WRX Mud Flaps Replacement

Learn how to replace the front and back mud flaps on your 2013 Subaru Impreza WRX.

Written By: Alex Davis

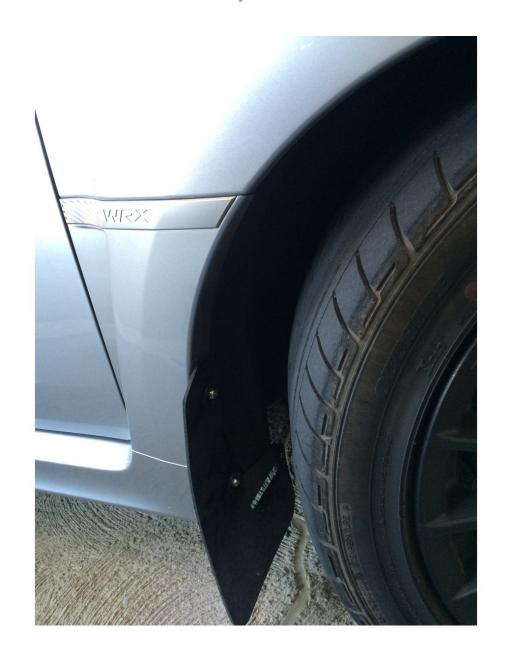

INTRODUCTION

Are your mud flaps cracked or broken? Use this guide to replace your mud flaps to look brand new.



TOOLS:

- 7/16" Socket (1)
- 10mm Wrench (1)
- Socket Wrench (1)
- Phillips #2 Screwdriver (1)




PARTS:

- Subaru Impreza WRX Mud Flaps (2)
- Subaru Impreza WRX Mud Flaps (2)
 Back

Step 1 — Mud Flaps



Always make sure your car is off, the parking break is applied, and you are in a safe area free from other passing cars.

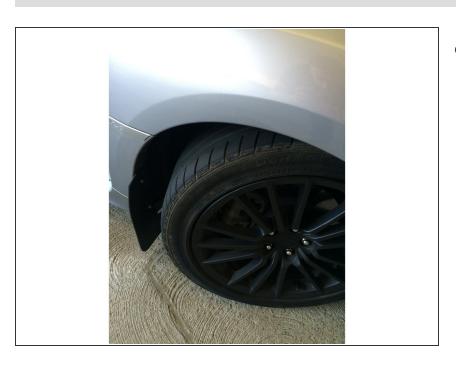

- Turn the wheels all the way towards the side you will be working on.
 - This will create easier access to the inside of the wheel well when you are replacing the mud flap.

Step 3








- Start with the front mud flaps.
 - Attach the 7/16th size socket piece to the wrench and begin removing the 7/16th diameter nuts.







- Use your Philips Head screwdriver to unscrew the farthest #6 3/4" Stainless Philips Screw.
 - Be careful not to loose the rubber gasket attached to the screw.

Step 5







- Once the old mud flap is removed, grab your new mud flap and reattach it in the same manner as how you removed the old or broken one.
- Repeat for opposite front mud flap.







- For the back two mud flaps you will need to use a slightly different technique due to the limited space you will be working in.
- Use your hands and the 10mm wrench piece to unbolt the mud flap.
- Once you have removed the nuts, you can move on to the #6 3/4" Philips Head Screw.
 - (i) This step will be aided by the use of an extra small Philips screwdriver.

Step 7



Replace both back mud flaps and fasten all pieces back in place.



- Make sure the mud flaps are all properly tightened and positioned before driving your car again.
- Enjoy your brand new mud flaps.

To reassemble your device, follow these instructions in reverse order.