




# Archos 5 Battery Replacement

This guide will help you replace the battery in...

Written By: Ally Hummel

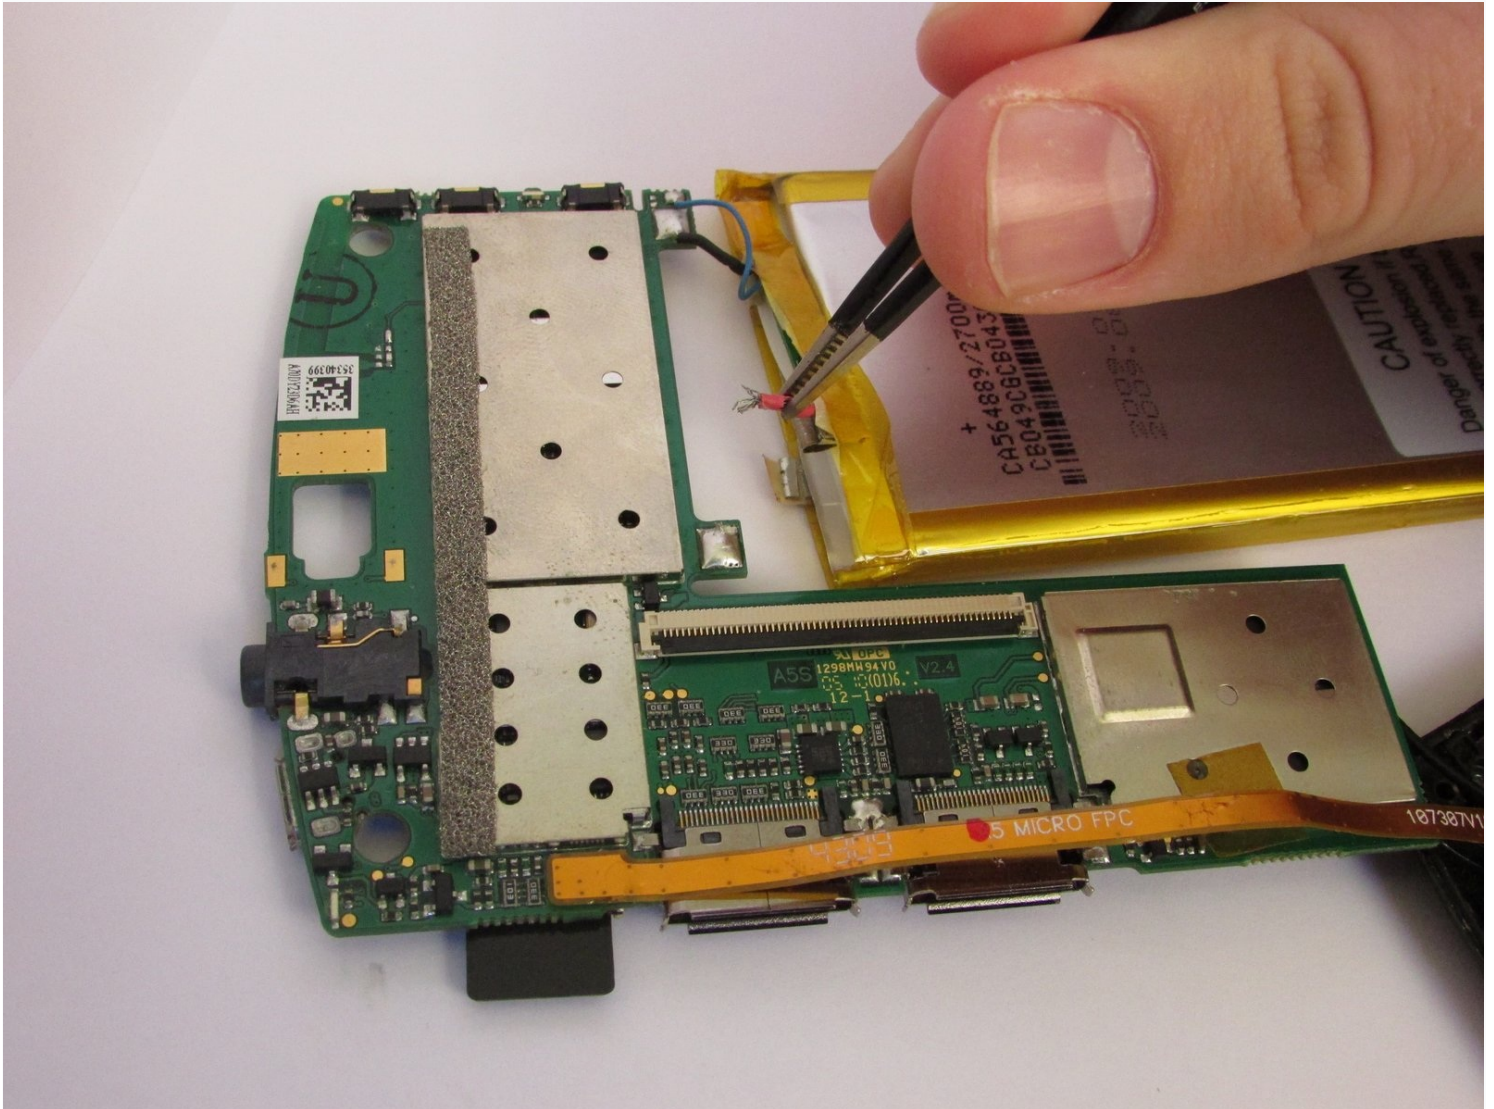

# INTRODUCTION

This guide will help you replace the battery in your Archos 5 tablet. Although this repair is pretty lengthy, don't be discouraged. You *can* do this yourself!


## TOOLS:


[iFixit Opening Tool](#) (1)  
[Phillips #000 Screwdriver](#) (1)  
[Soldering Iron](#) (1)  
[Tweezers](#) (1)  
[Spudger](#) (1)


## PARTS:

[Archos 5 battery](#) (1)


## Step 1 — Battery

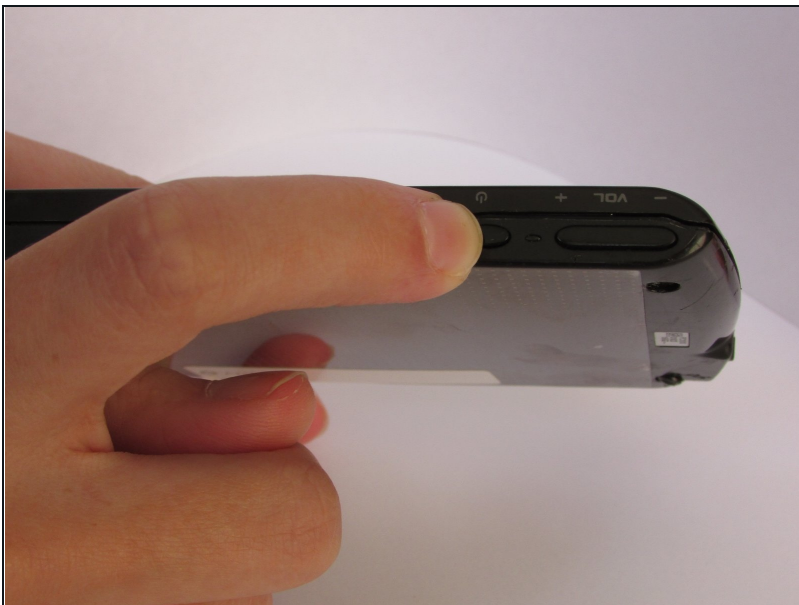

 Please be sure that your device is powered off before attempting any repairs.



 Please be aware that any further steps could possibly void the warranty of your Archos 5.

## Step 2

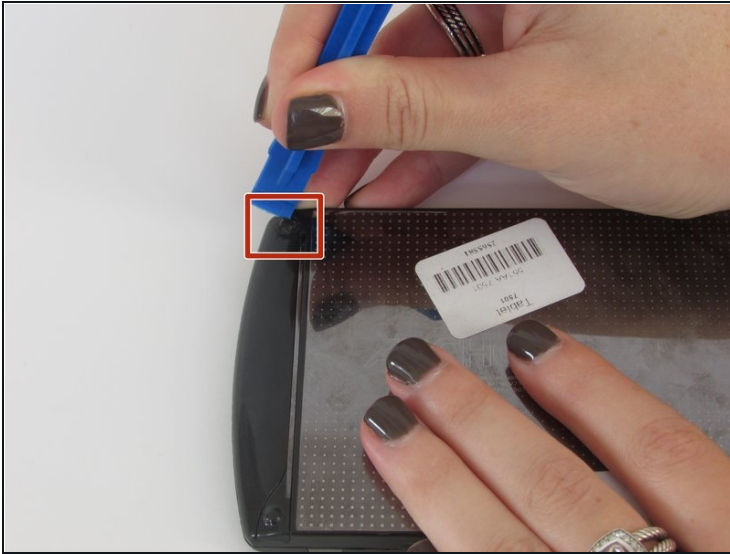

- Use the plastic opening tool to take off 3 black sticky pads that cover the screws.
- Use the screwdriver(PH000) to remove the screws located under the pads.
- ① Lift the stand in order to get to the fourth screw.

### Step 3

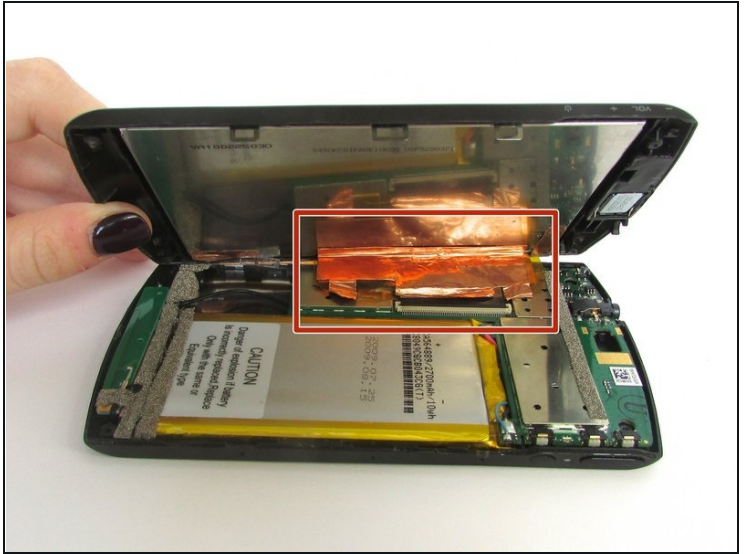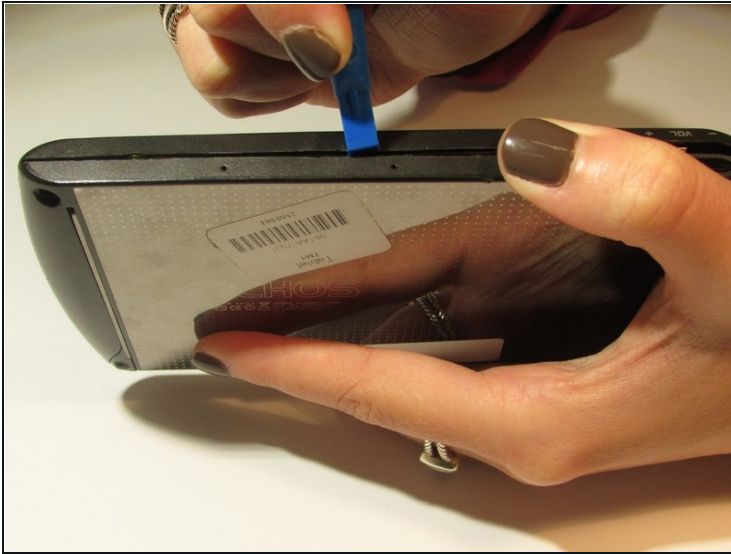

- Carefully pry open all 4 sides of the Archos 5 using the plastic opening tool.
- Once all sides of the device are pried open, gently open the device .

⚠ Be careful not to tear the foil which connects the LCD screen to the motherboard!



## Step 4




- Once you have opened your device, fold the screen away from the battery.
- ⚠ Metal spudgers can puncture an unprotected battery, potentially causing a fire. When working with electronics, it's important to choose a tool that's ESD-safe to avoid accidental damage to the device. The regular black nylon spudger or a plastic opening tool should be used whenever possible.
- Unplug the touch pad from the motherboard. Do this by applying pressure on the thin black piece(attached at the bottom of the metallic foil) Press the **plastic spudger** against the thin black piece and release it.

## Step 5



- Separate the grey tape by using **a plastic spudger**. The tape is holding the battery in place.

## Step 6

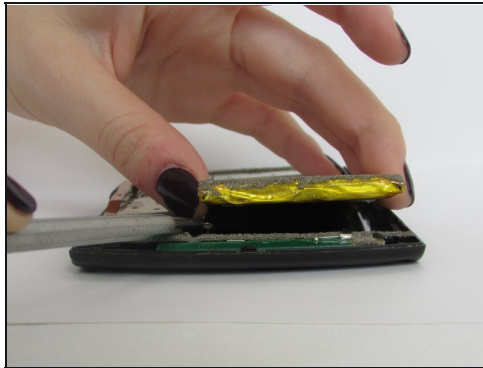




- Now begin to remove the battery by prying it away with the **plastic spudger**. Please note that the battery is glued to the device.
- Be careful when prying the battery away from the device. Wiggle the **plastic spudger** under the battery if necessary to loosen the glue.

## Step 7




- Locate 3 wires (red, blue and black) that connect the motherboard and the battery.

## Step 8

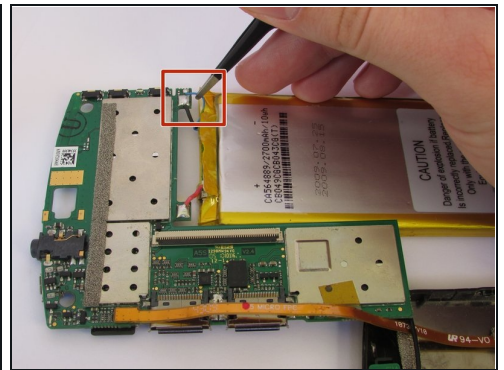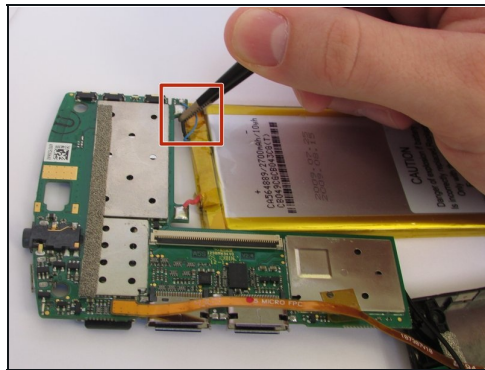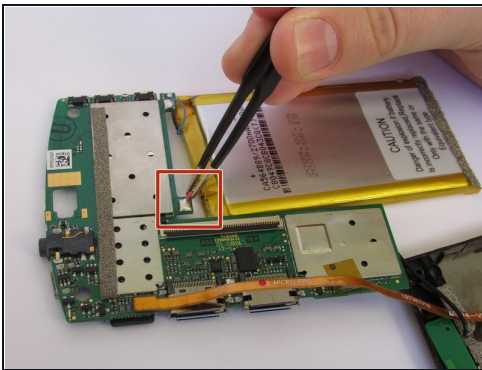

- After locating the wires (red, blue, and black) firmly pull the wires using [tweezers](#) and release them from the motherboard.
- Continue to do this to the remaining two wires.

## Step 9

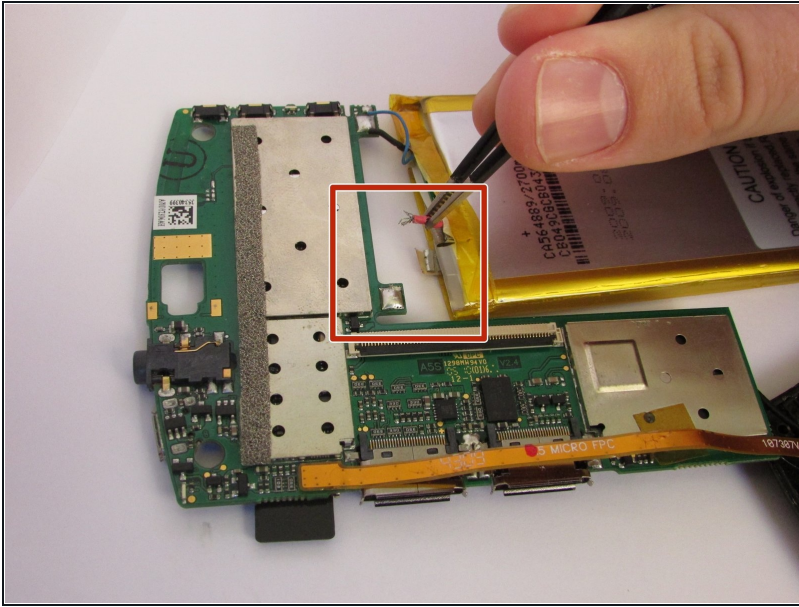

- Once the wires have all been released remove the battery from the device and replace with a new battery. To reattach the new battery wires please refer to this guide on [How To Solder](#)

---

To reassemble your device, follow these instructions in reverse order.