



Acer Aspire E5-571 WiFi Replacement

Without WiFi you can have a hard time getting...

Written By: daniel sawyer



INTRODUCTION

Without WiFi you can have a hard time getting connected to the internet. This guide will show you how to replace a broken internal WiFi card.

TOOLS:

[Metal Spudger](#) (1)

[iFixit Opening Tool](#) (1)

[Phillips #0 Screwdriver](#) (1)

Step 1 — Battery



 **Make sure the laptop is shut down.**


- Flip the laptop upside down. Rotate it so the battery faces you.

Step 2




- Place the pointed end of a spudger into the battery lock. Slide the battery lock to the left using the spudger. A "click" sound will accompany the release of the battery.

Step 3

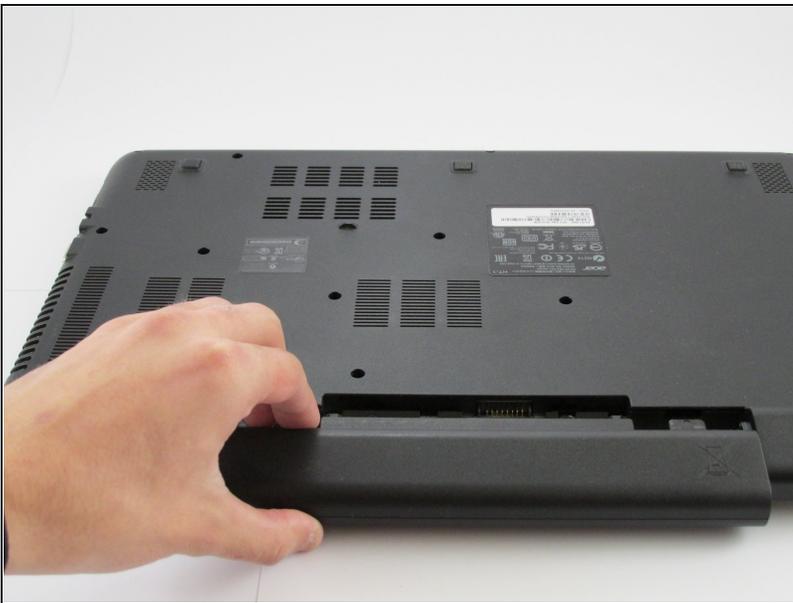

- Pull the battery towards you to remove it from the laptop.

Step 4 — Keyboard

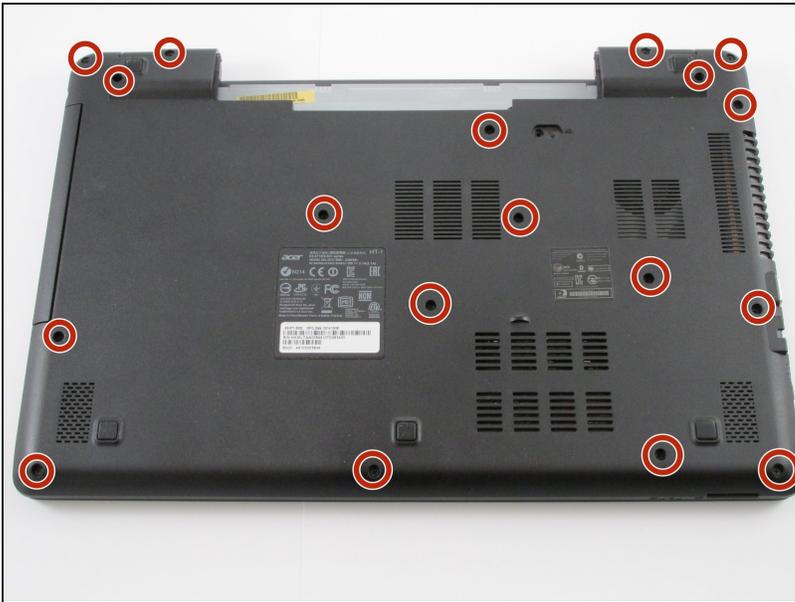

- Remove all eighteen 8 mm screws with a Phillips #0 screwdriver.


Step 5



- Carefully pry apart the clips holding the keyboard in place by moving a metal spudger along the seam.

⚠ Be careful not to break the plastic clips. Do not remove the keyboard until told to do so.

Step 6

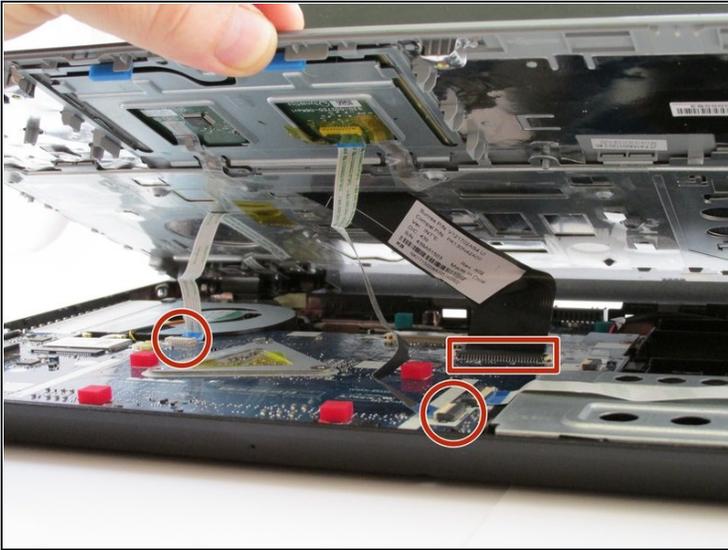


- Carefully flip up the white hinge. Then, detach the three ZIF ribbons connected to the motherboard.
- Remove the panel with the keyboard and the touchpad.

Step 7 — WiFi



- Locate the WiFi card on the motherboard.

Step 8

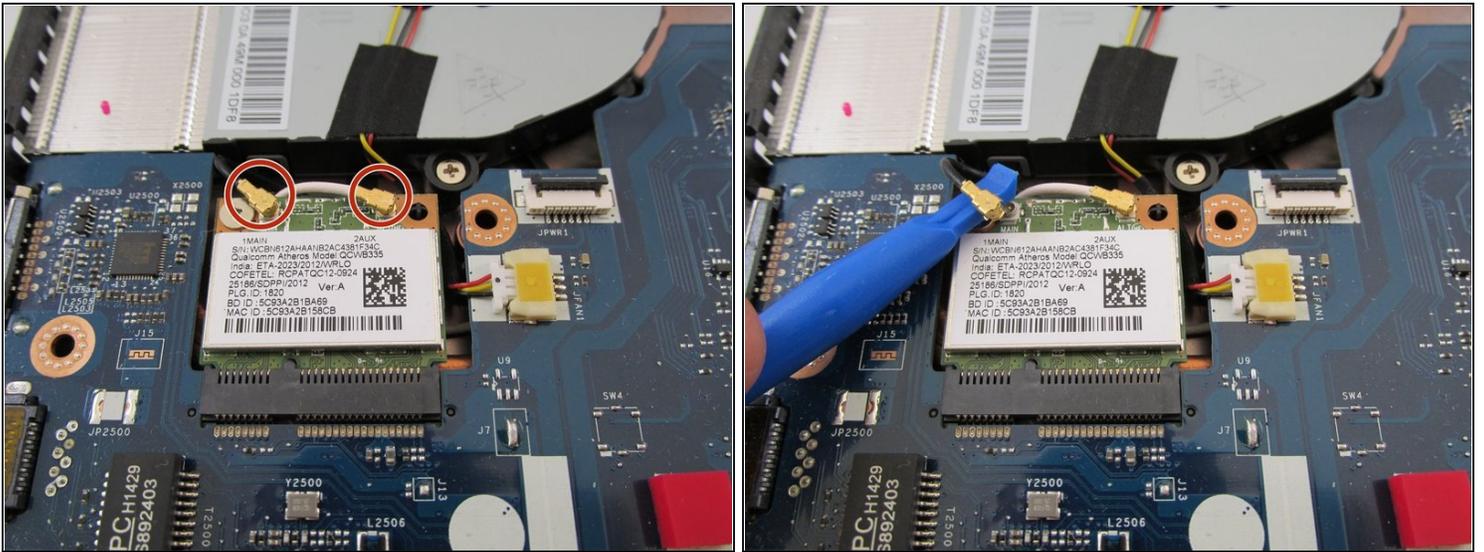

- Locate the two antenna cables shown.
 - Using a plastic opening tool, remove both antenna cables from the WiFi card by gently prying them up.
- ⓘ Black on left. White on right.

Step 9



- Remove this 3 mm Phillips #0 screw and the WiFi card should pop up.
⚠ Make sure antenna cables are removed before removing the screw.
- Gently lift WiFi card off of the motherboard.

To reassemble your device, follow these instructions in reverse order.

