




# Motorola Razr V3m Speaker Replacement

How to replace the speaker on the Motorola Razr V3m

Written By: Daniel Simcock

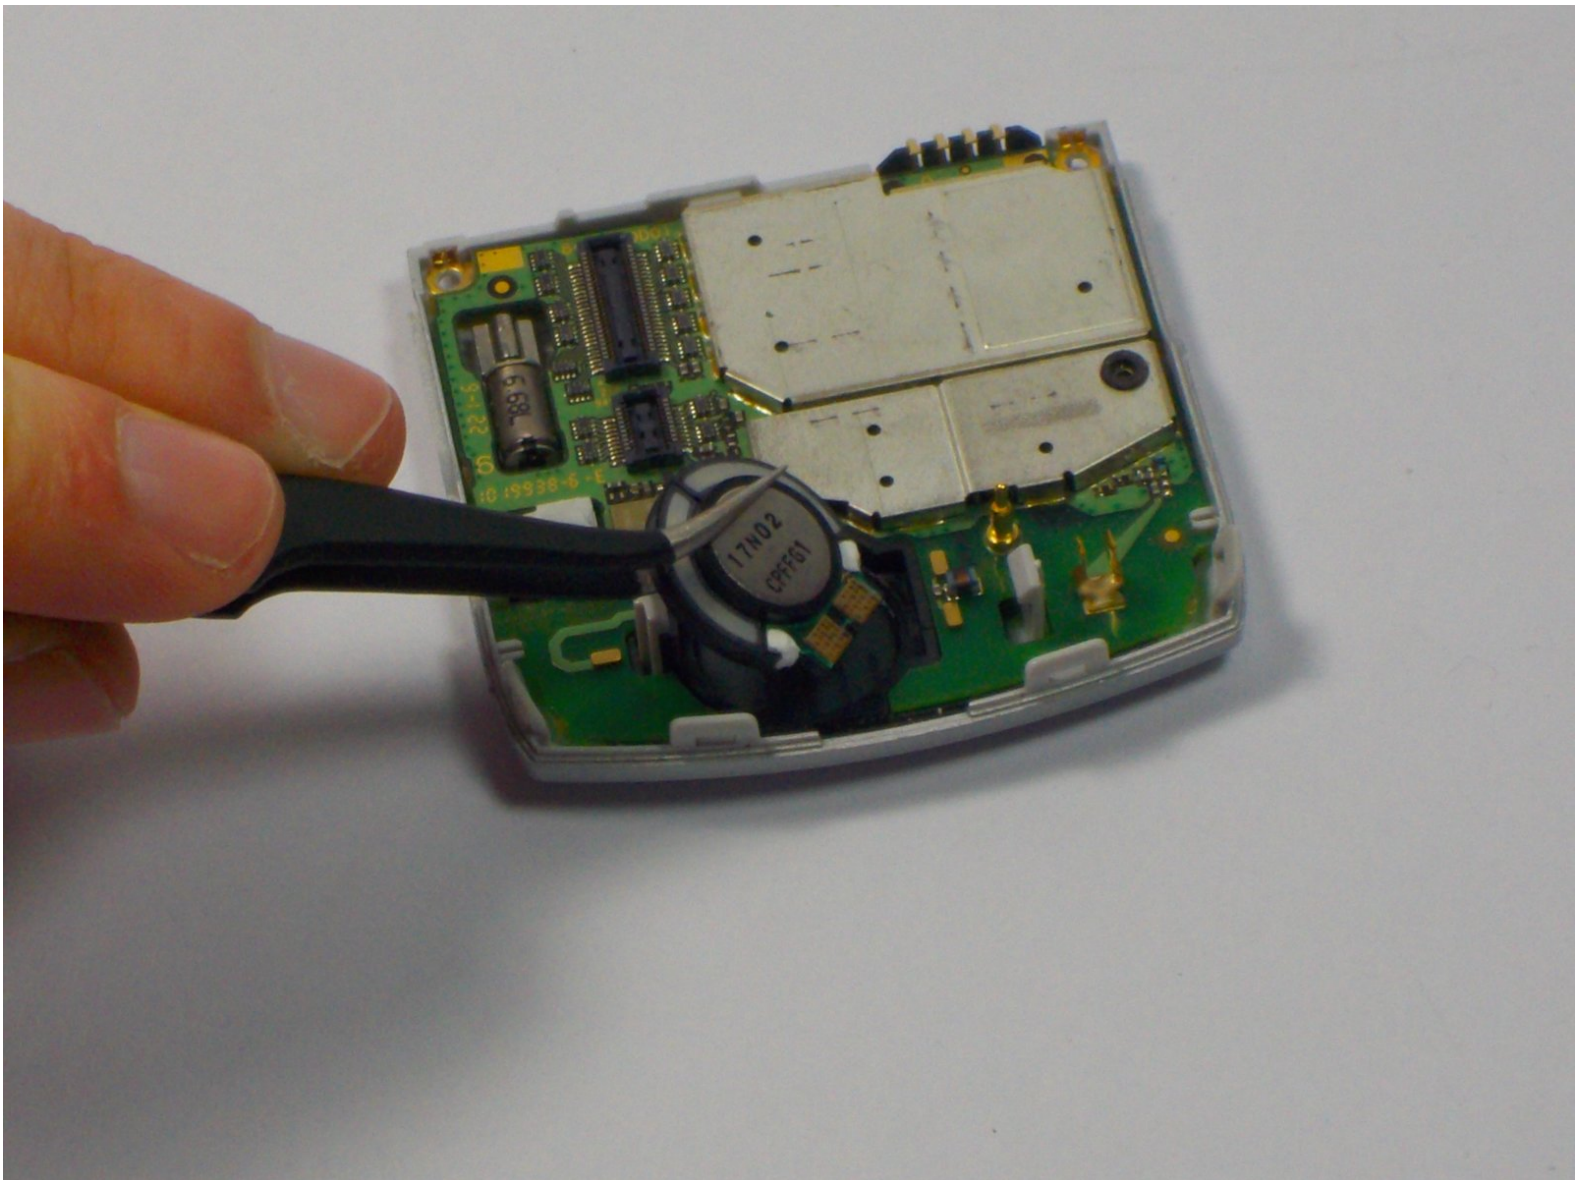




## TOOLS:


- [Spudger](#) (1)
  - [T6 Torx Screwdriver](#) (1)
  - [Tweezers](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Battery

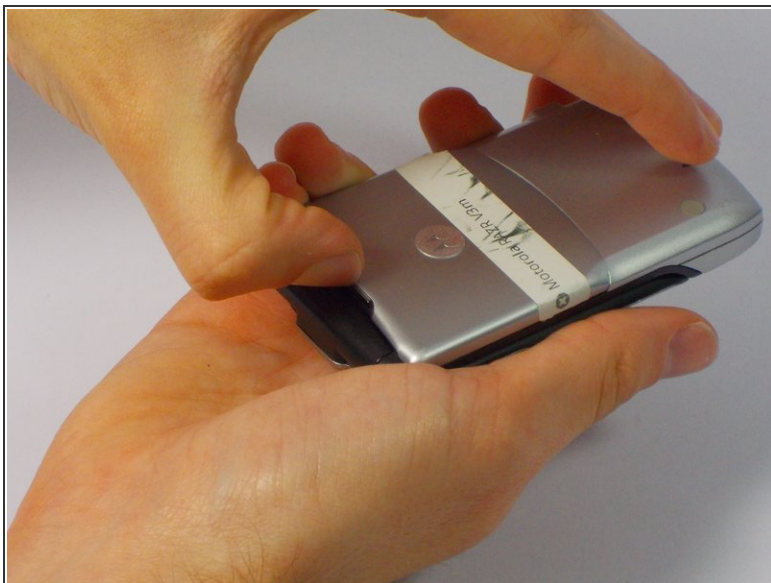

- Press the release button located on the upper edge of the battery cover. At the same time, lift the battery cover away from the phone.

## Step 2

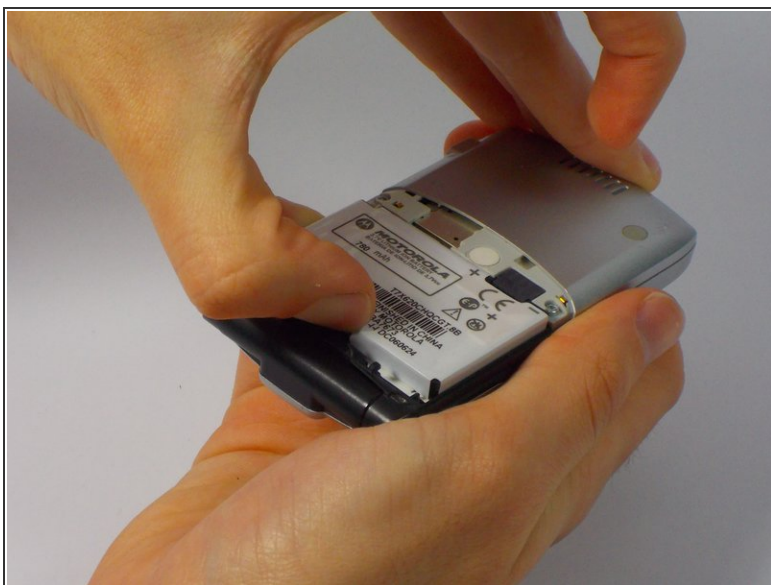

- Push the top edge of the battery and lift away from the phone.



## Step 3 — SIM Card



- Gently pull the SIM Card toward the top of the phone with your finger.

## Step 4 — Antenna




- Remove the two screws from the back panel with a T6 screwdriver.

## Step 5



- Carefully use a plastic opening tool to pry back panel open.
- ⓘ The back panel is attached to the phone with a copper ribbon that acts as a hinge.
- Carefully open out the back panel to the side of the phone corresponding with the hinge.
- ⚠ Do not pull back away from phone. It may damage the copper ribbon.


## Step 6

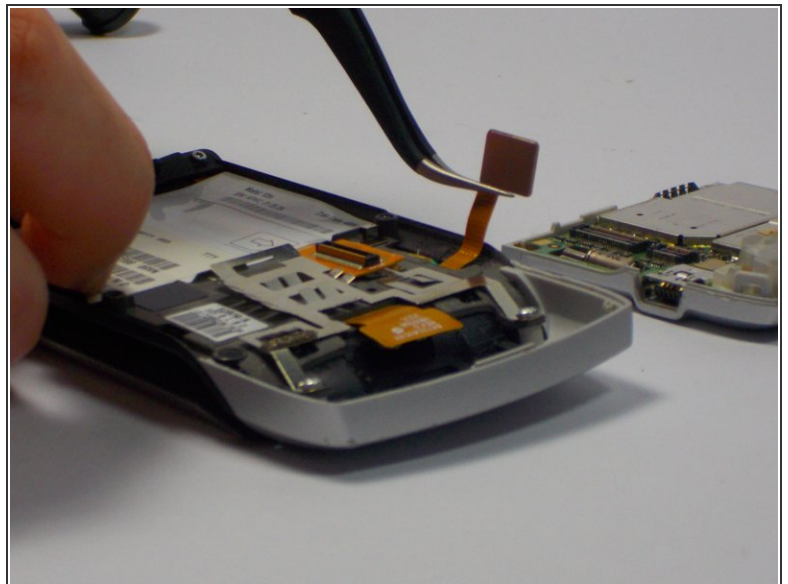

- Use tweezers to disconnect the copper ribbon from the inside of the back panel.





## Step 7

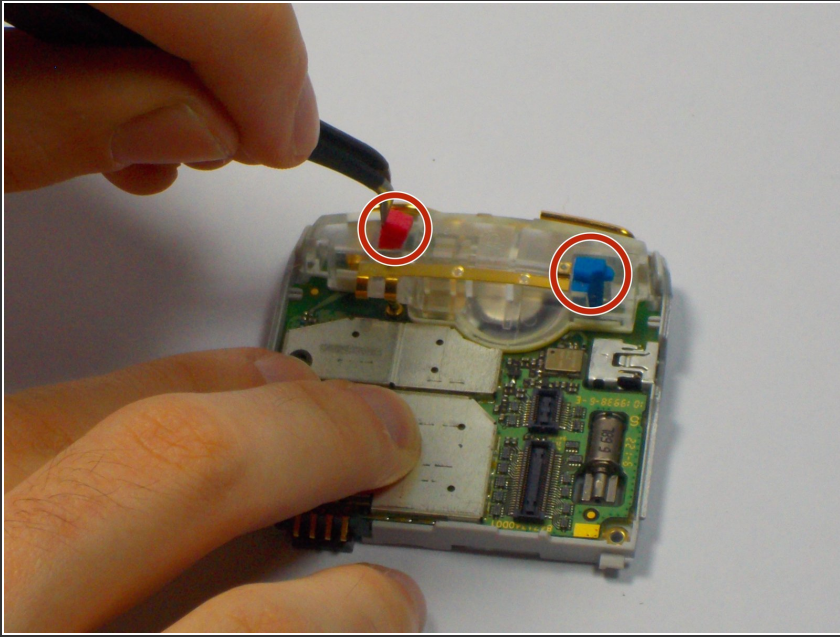

- Use tweezers to remove the tiny red and blue rubber covers located on the top of the antenna.


## Step 8

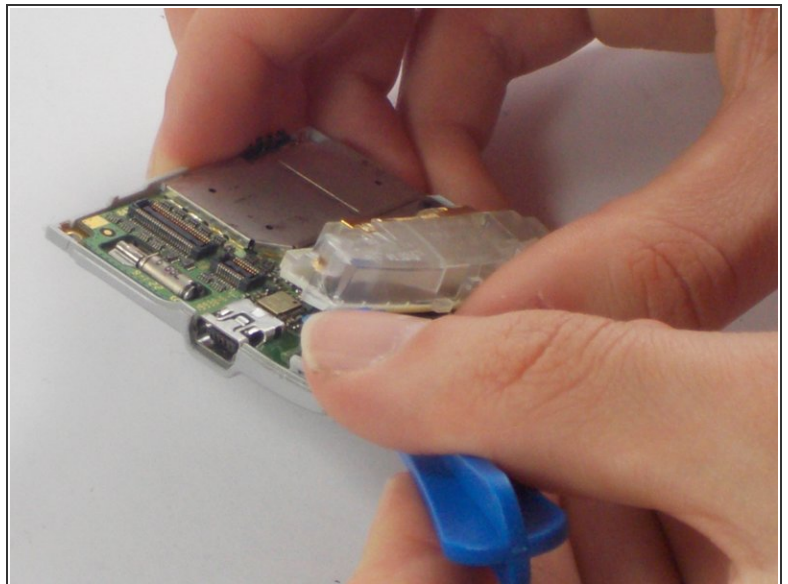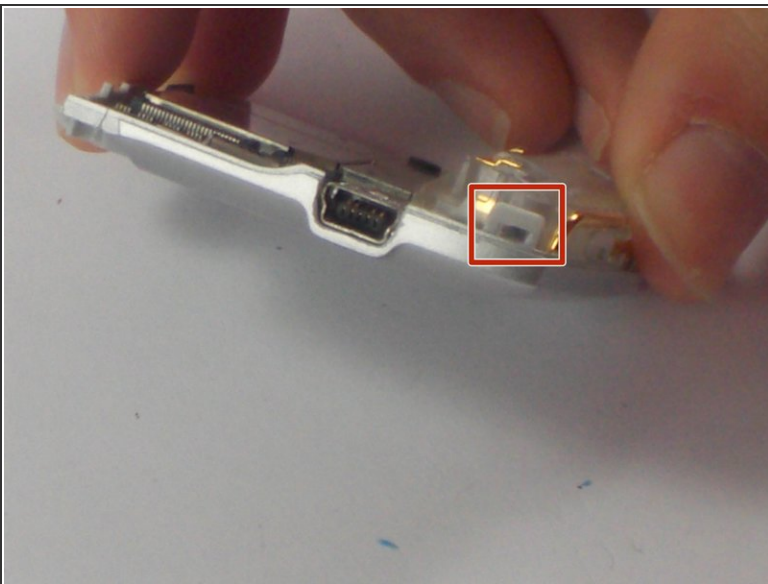

- Use a plastic opening tool to pry the edge of the antenna away from back panel.
- ⓘ The antenna may be fastened with two grey clips on either side. If this is so, unfasten two plastic clips located on the edge of the antenna.
- Lift antenna away from back panel.

This document was generated on 2020-11-28 04:48:30 AM (MST).

## Step 9 — Speaker

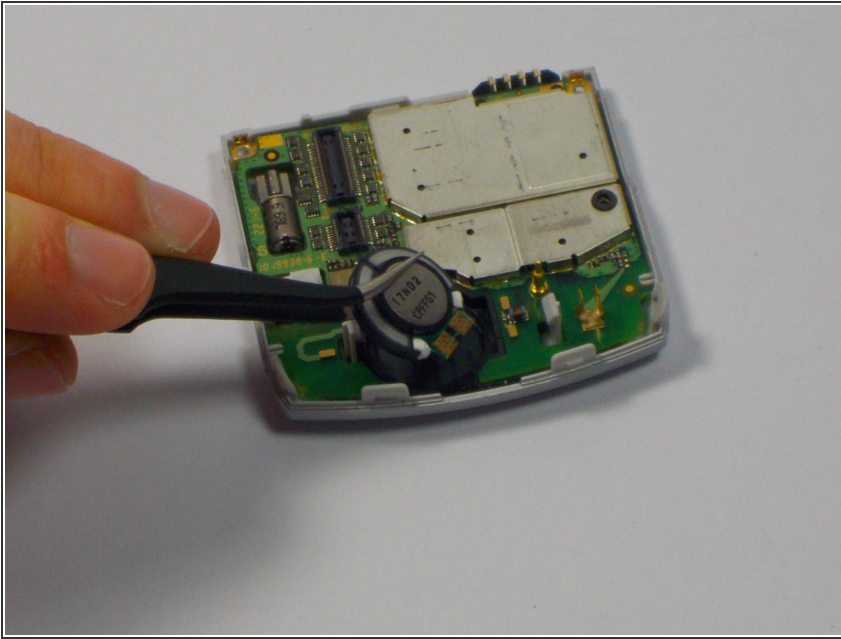

- ① The Speaker is the round piece located beneath the antenna.
- Use tweezers to remove the speaker.

To reassemble your device, follow these instructions in reverse order.