




How to Replace Asus Transformer Pad TF103C Headphone Jack

This guide will help you replace the Asus...

Written By: Tyler Ellis

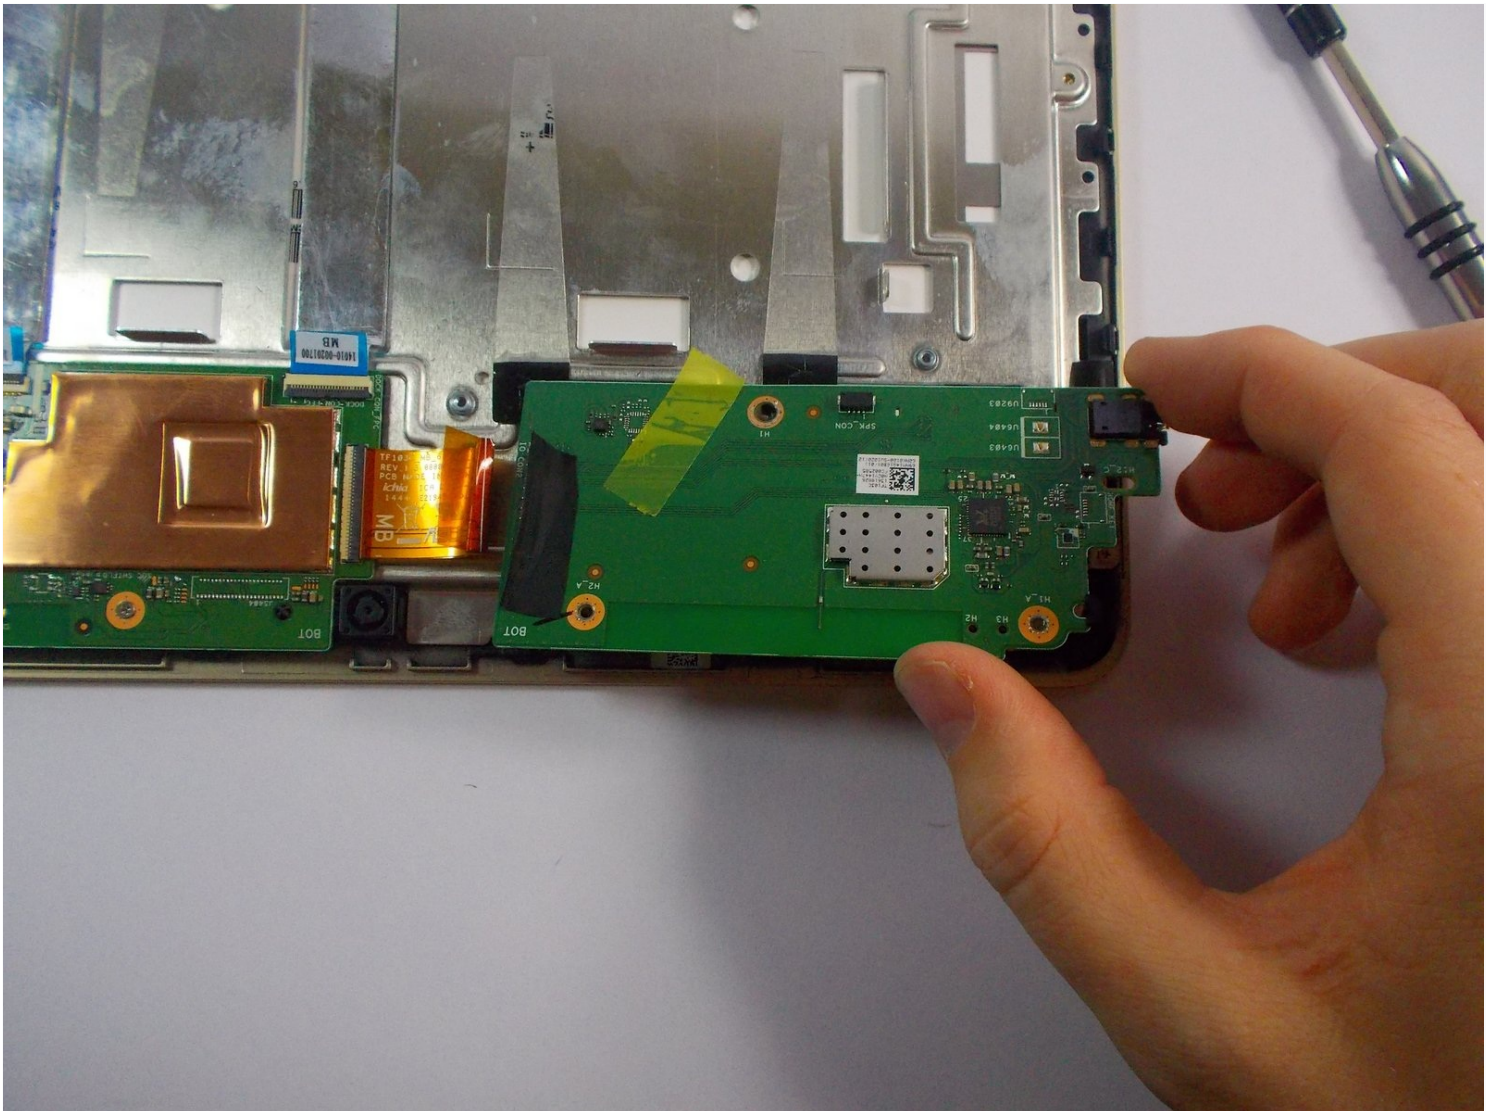

INTRODUCTION

This guide will help you replace the Asus Transformer Pad TF103C Headphone Jack. which is detailed and has fewer tools. It's an as Easy quick guide that won't need a lot of knowledge as long as you follow the instructions.

TOOLS:

[m2 plastic holder](#) (1)
[+J000 screwdriver](#) (1)
[Spudger \(or a plastic opening tool\)](#) (1)

PARTS:

[ASUS Transformer Pad \(TF103C\)](#)
[Headphone Jack Assembly](#) (1)

Step 1 — Headphone Jack




- Turn the power off.
- Insert plastic opening tool on the side of the tablet.
- ① Use a thin screwdriver if you don't have an opening tool.
- Gently pull upwards and carefully pry open the Transformer pad.

Step 2




- Slide the tool along all four edges and continue to pull the tool upwards.

Step 3

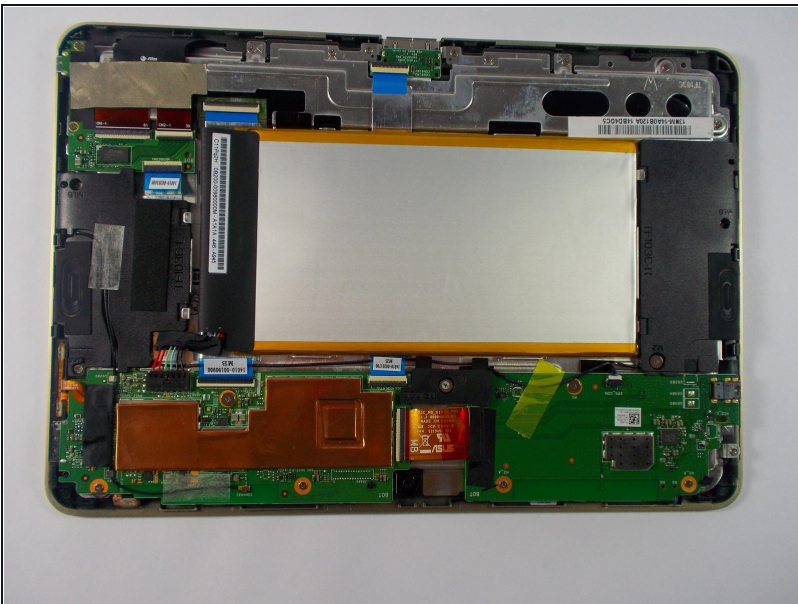


- Remove the back cover once it is detached then set it aside.
- Rotate tablet to match picture to make the guide easier to follow

Step 4

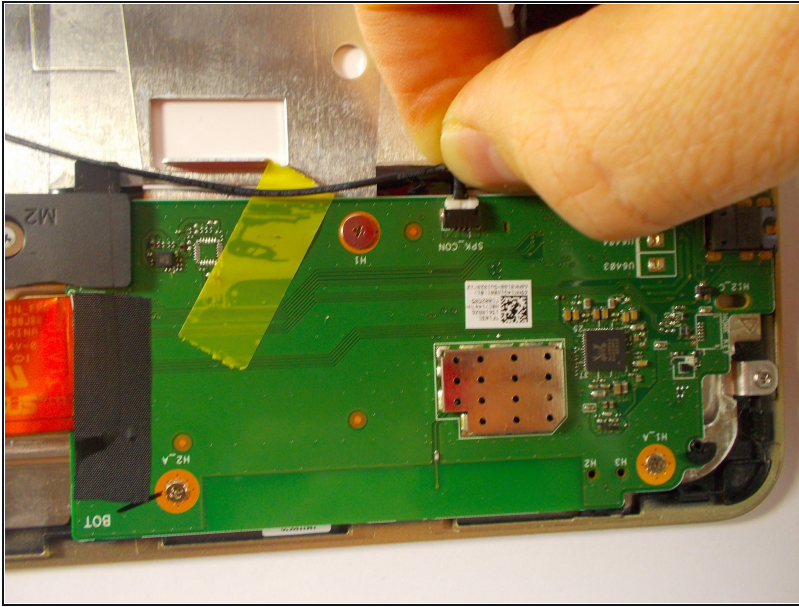


- Remove the tape and unplug wire that attaches to both speakers from soundboard.

Step 5

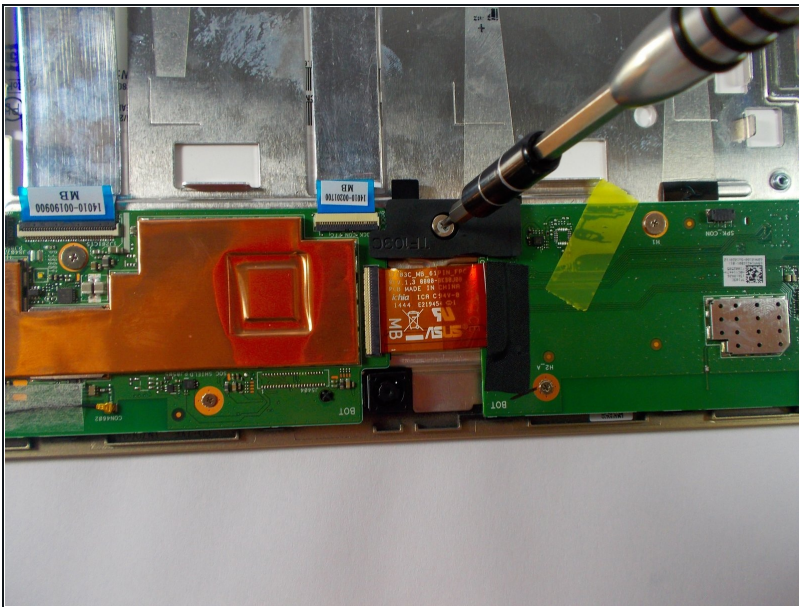


- Use the +J000 screwdriver to unscrew and remove the M2 plastic holder.

Step 6

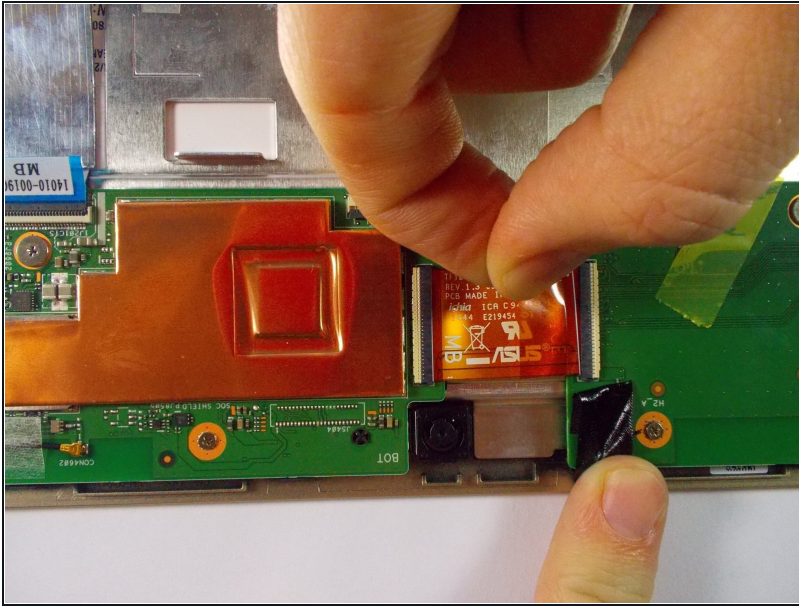



- Remove black tape from ribbon cable and separate the cable from the soundboard.

Step 7

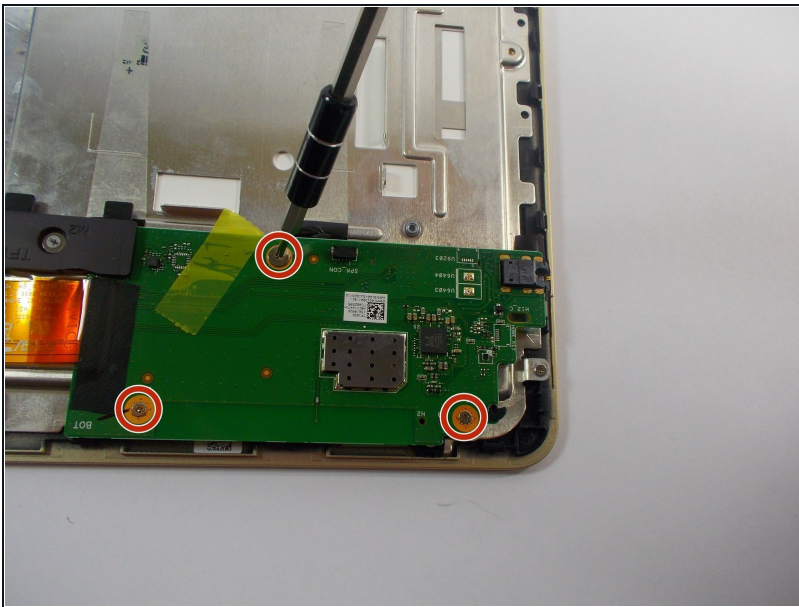

- Use the +J000 to remove three screws from soundboard.
- ☒ Keep the screws together and organized. (Label, if necessary).

Step 8

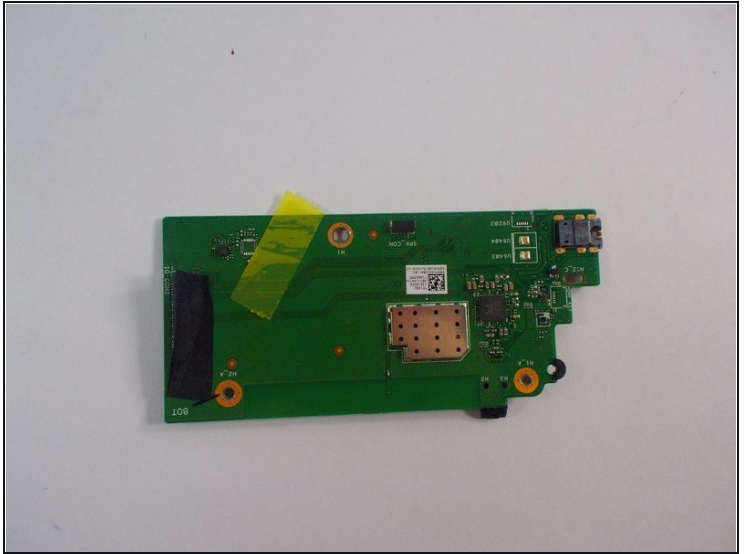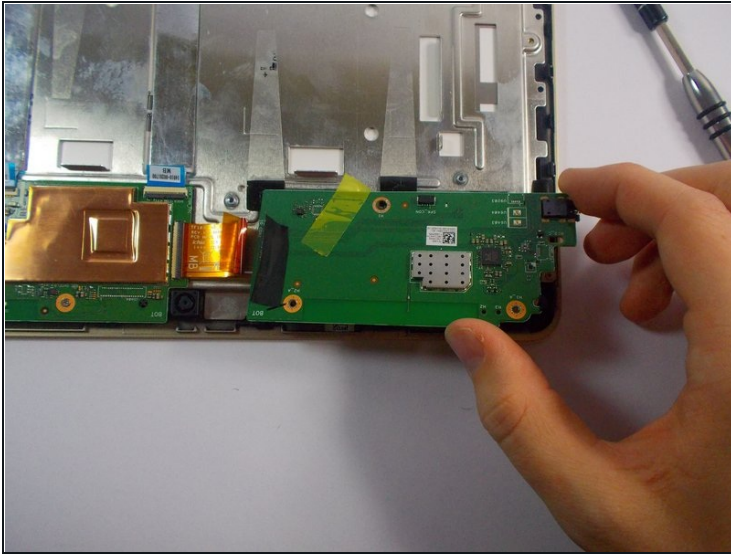

- Remove soundboard which has the headphone jack attached to it.
- Once done reassemble your device, follow these instructions in reverse order.

To reassemble your device, follow these instructions in reverse order.