



Motorola Razr V3m Screen/Camera Replacement

How to replace the screen and front facing camera.

Written By: Daniel Simcock



 **TOOLS:**


- [T4 Torx Screwdriver](#) (1)
 - [Tweezers](#) (1)
 - [Spudger](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery



- Press the release button located on the upper edge of the battery cover. At the same time, lift the battery cover away from the phone.

Step 2

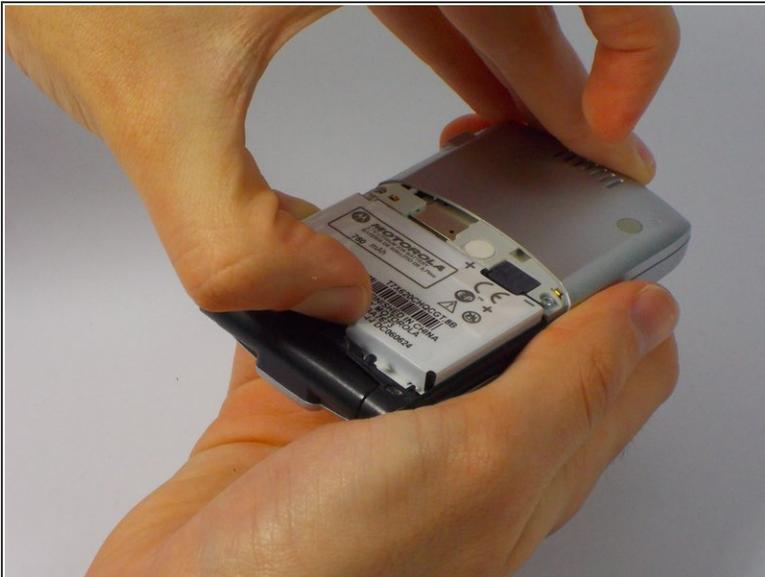

- Push the top edge of the battery and lift away from the phone.

Step 3 — Screen/Camera




- Remove the 4 screws on the corners of the inside screen with the T4 screwdriver
- ⓘ The phone may have rubber plugs covering the screws of the inside screen. If so, remove the rubber plugs with a thin metal needle.

Step 4




- Use a plastic opening tool to pry the external shell off of the phone.
- ⚠ Use care when doing this step because you don't want the external shell or the pieces inside the phone to break.

Step 5

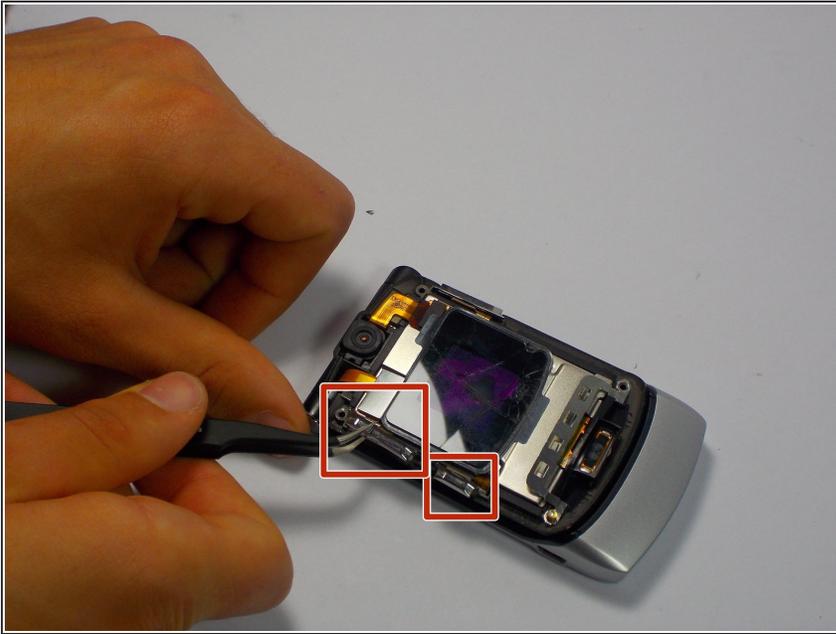



- Remove the two side buttons with tweezers.

Step 6

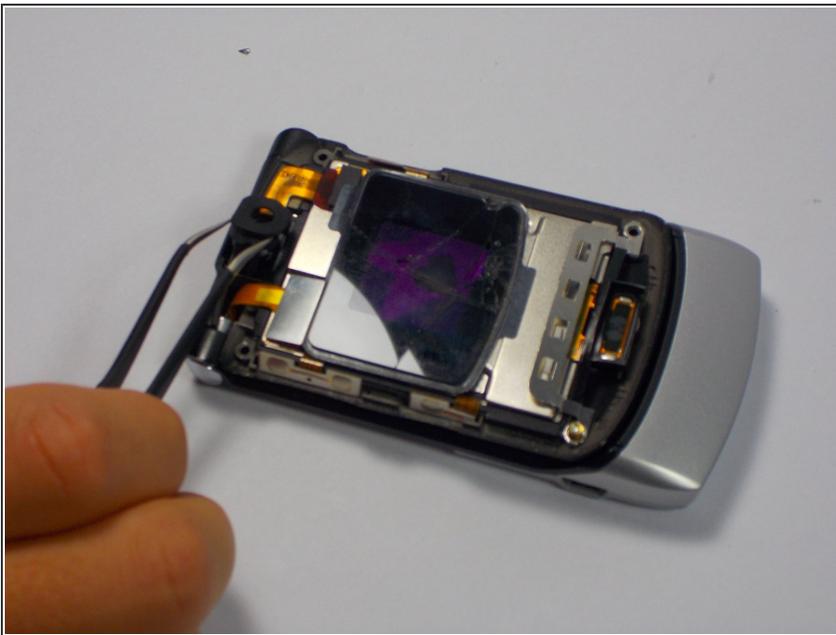

- Use tweezers to remove the circular magnetic ring covering the camera.

Step 7

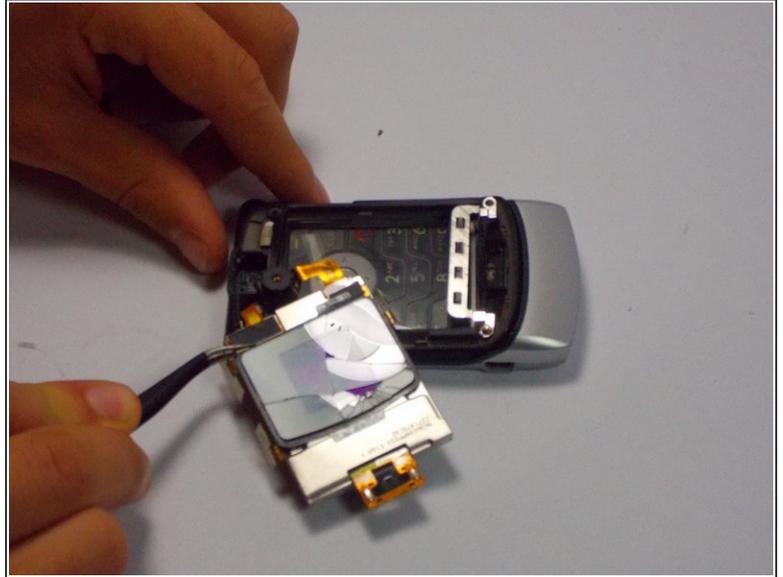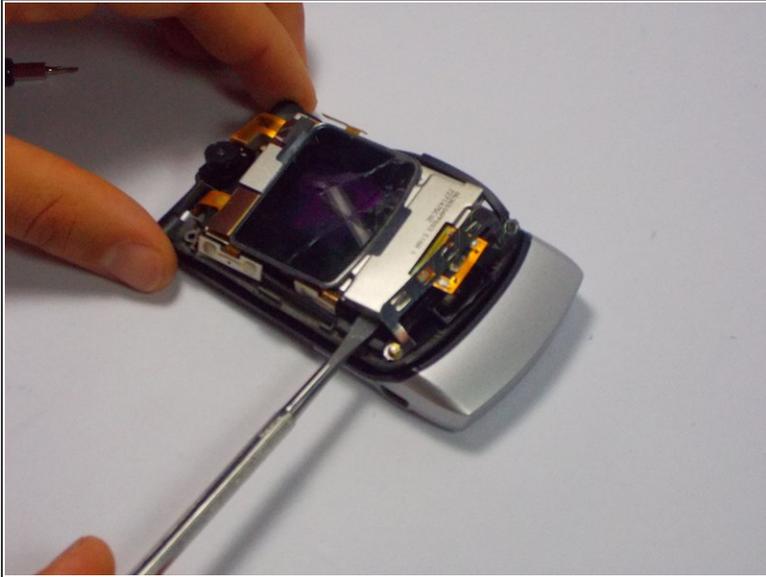

- Use a spudger to pry the screen from the inside front part of the phone.
- ⓘ You may choose to use tweezers to remove the screen instead.

To reassemble your device, follow these instructions in reverse order.