



Motorola Razr V3m Keypad Cover Replacement

Written By: Jonathan Gendron



TOOLS:


T6 Torx Screwdriver (1)

Spudger (1)

Tweezers (1)



iFixit Opening Tool (1)

Step 1 — Battery

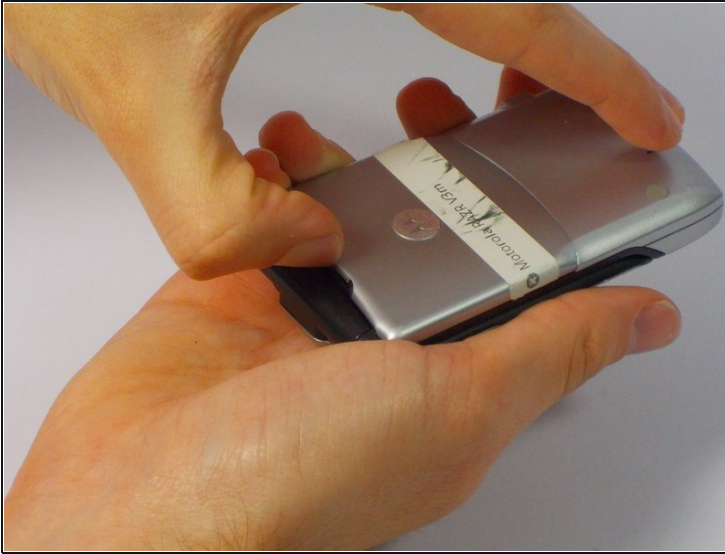

- Press the release button located on the upper edge of the battery cover. At the same time, lift the battery cover away from the phone.

Step 2

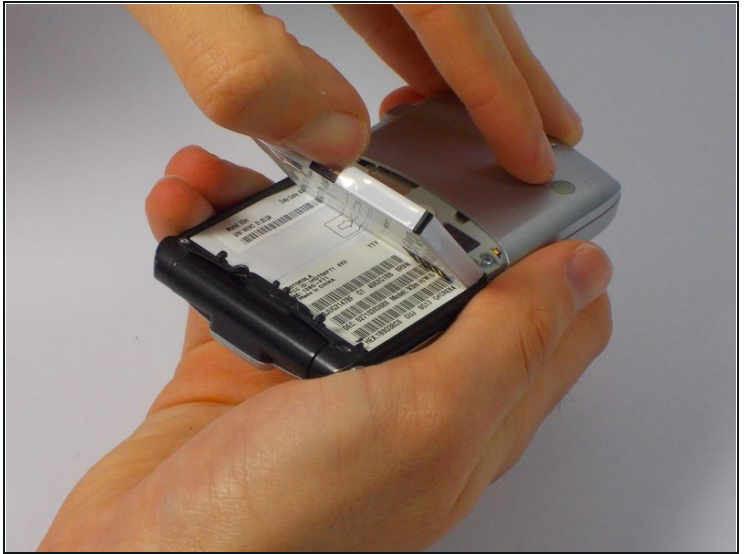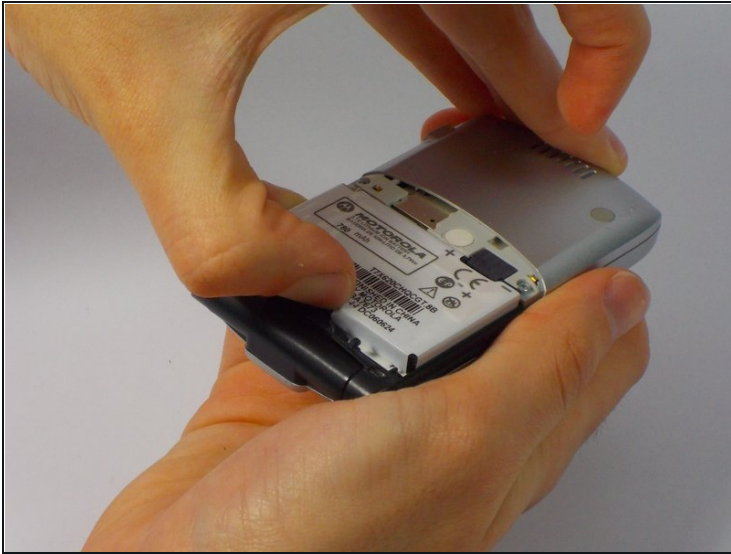

- Push the top edge of the battery and lift away from the phone.

Step 3 — SIM Card




- Gently pull the SIM Card toward the top of the phone with your finger.

Step 4 — Keypad Cover



- Remove the two screws from the back panel with a T6 screwdriver.


Step 5

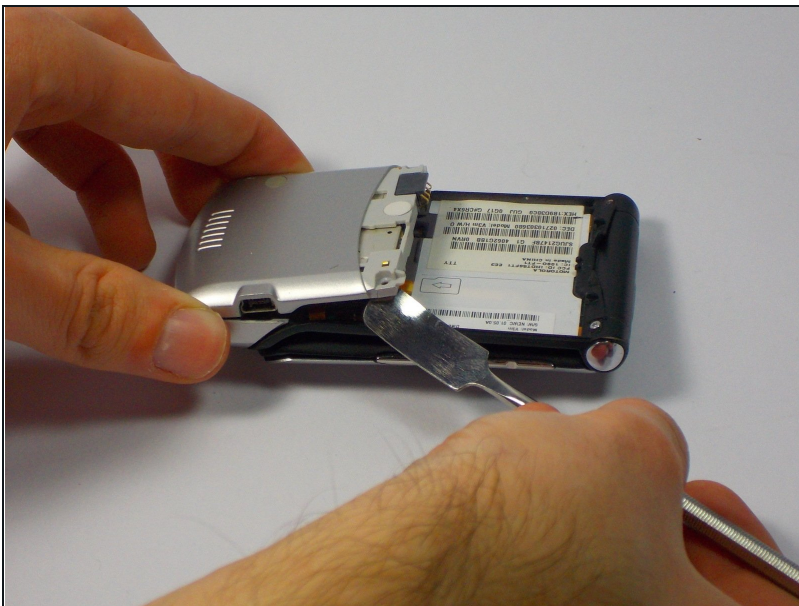

- Carefully use a metal spudger to pry back panel open.
- ⓘ The back panel is attached to the phone with a copper ribbon that acts as a hinge.
- Carefully open out the back panel to the side of the phone corresponding with the hinge.


⚠ Do not pull back away from phone. It may damage the copper ribbon.

Step 6

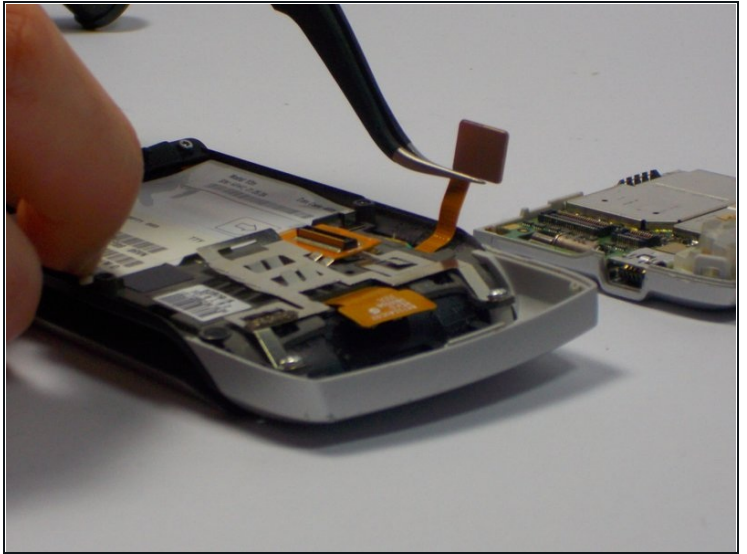

- Use [tweezers](#) to disconnect the copper ribbon from the inside of the back panel.

Step 7

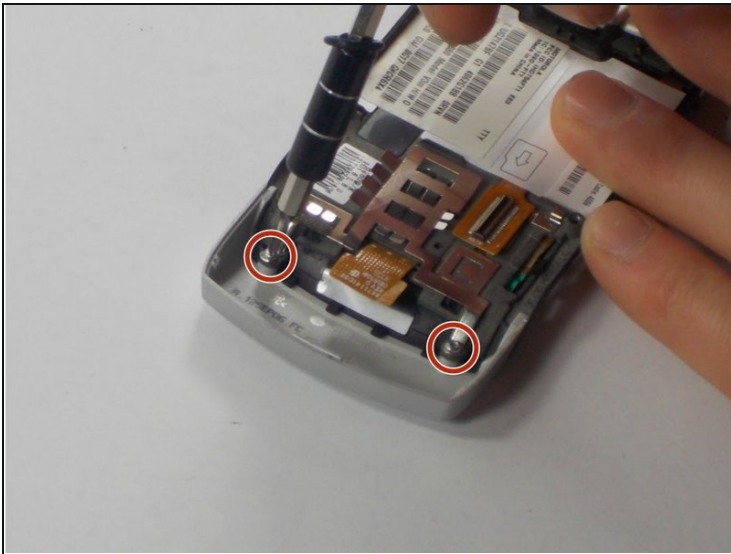


- Use a T6 Torx bit screwdriver to remove the two screws holding the cover down.
- ① The metal shield will come off with the screws; don't forget to reattach it before replacing the screws.

Step 8




- Remove the keypad cover, located below the keypad on the front of the phone.

Step 9

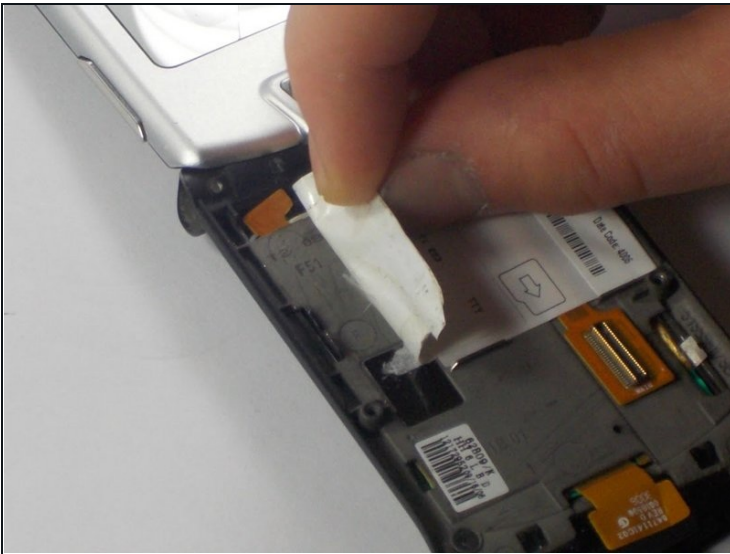

- Remove the sticker on the back of the phone.

Step 10

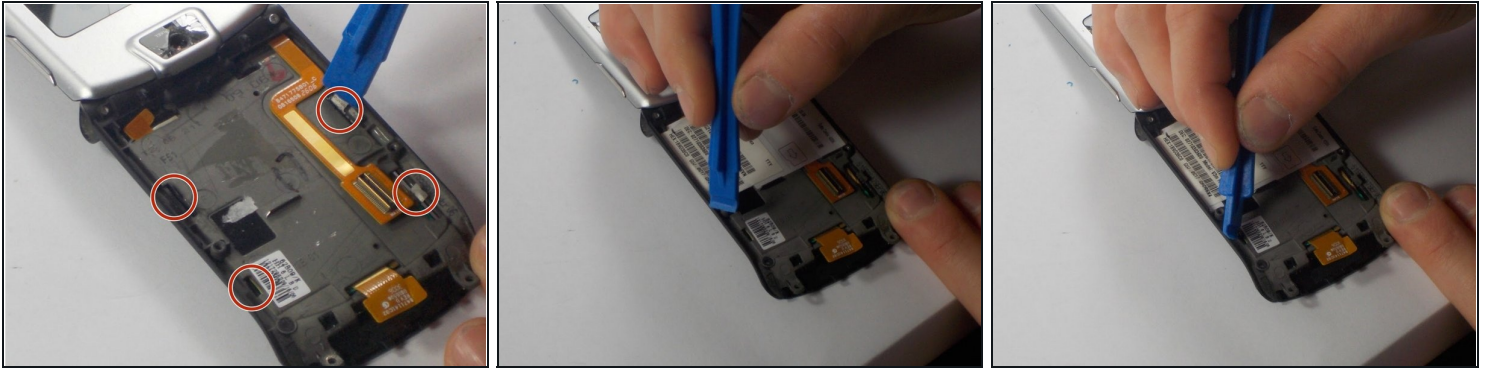

- Using a plastic opening tool, push the four metal tabs along the edge of the phone in towards the keypad.

Step 11



- Using the plastic opening tool, pry the edges of the keypad until it is loose. Then, pull it off.

☒ It is easiest to work your way from left to right when loosening the case.

To reassemble your device, follow these instructions in reverse order.