



Motorola V400 Main Screen Replacement

Replace the main screen on your Motorola V400 cellular device.

Written By: Megan Brewer



INTRODUCTION

This guide will instruct you how to remove and successfully replace the main screen on the phone.

TOOLS:


- [T6 Torx Screwdriver](#) (1)
 - [Tweezers](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Removing Outer Shell




- Remove the 4 stoppers surrounding the main screen with tweezers.
- Use a Torx T-6 Screwdriver to unscrew the 4 screws around the screen.
- Use a plastic opening tool to separate outer shell from metal interior cover.

Step 2

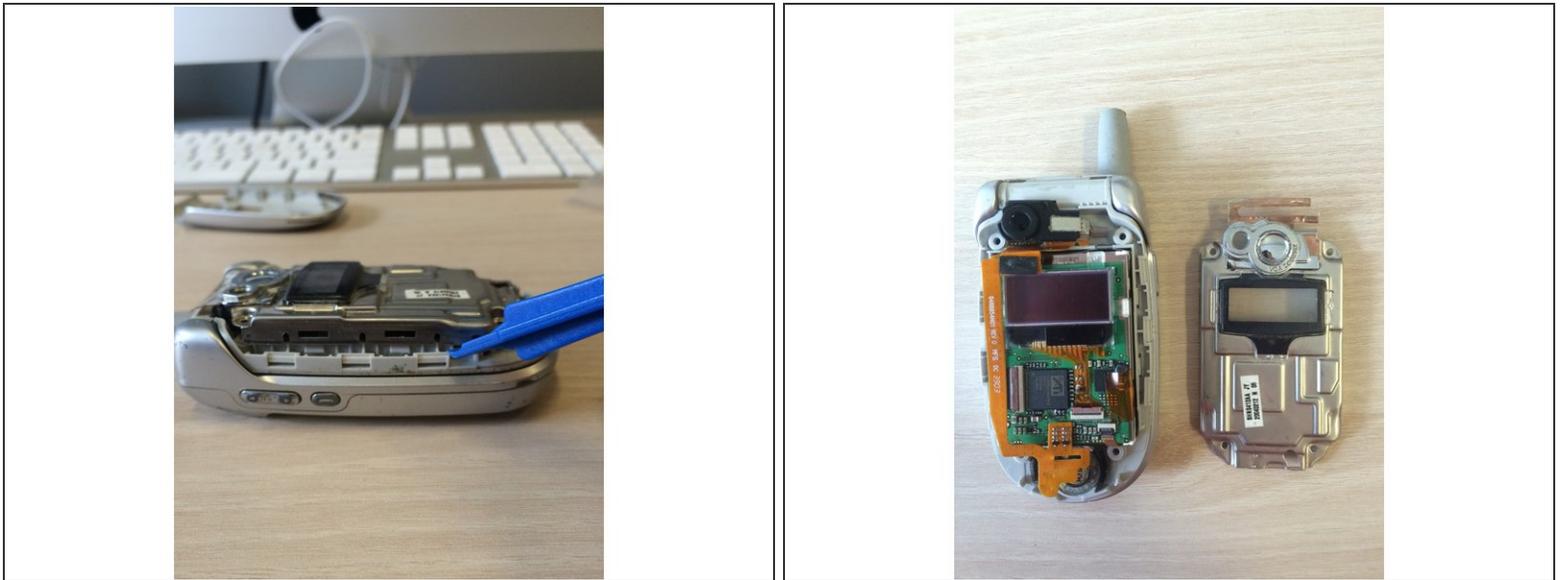

- Use plastic opening tool to to separate inner metal cover from the circuit board. Apply pressure to remove the piece.

Step 3

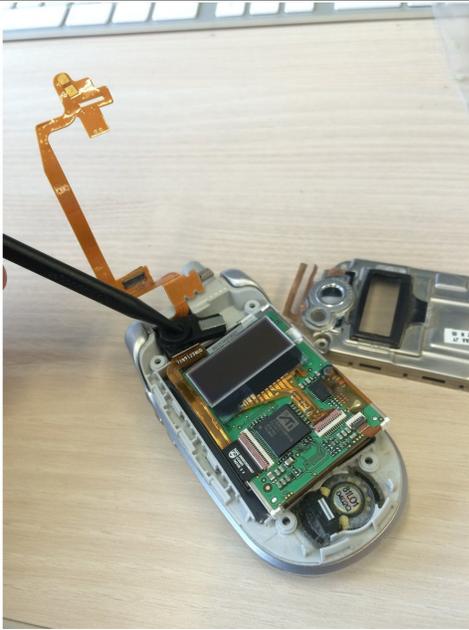

- Insert black spudger beneath circuit board to pry it from phone screen.

Step 4



- Apply pressure to remove the screen from its adhesive backing on the plastic.
- Place new screen on the phone.

To reassemble your device, follow these instructions in reverse order.