



Lenovo Tab 2 A10-70 Battery Replacement

This guide will illustrate how to remove and replace the Lenovo Tab 2 A10-70 battery.

Written By: Stacy Tinner



INTRODUCTION

Bring life back to your Lenovo Tab 2 A10-70 with a new battery.

TOOLS:

- [Spudger](#) (1)
 - [Tweezers](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
 - [Phillips #000 Screwdriver](#) (1)
-

Step 1 — Battery



✦ Before removing the battery, make sure the device is powered off

- Use a plastic opening tool to pry open the back cover of the tablet.
- The second picture shows the tablet with the back removed.

Step 2



- Remove the tape that secures the ribbon cable.
- Use precision tweezers if the tape cannot be removed by hand.

Step 3



! Handle ribbon cables with care so it does not rip or tear.

- Carefully remove the ribbon cable from the power button connector.
- To remove the cable, push the clamp on the connector up and pull gently.

Step 4



- Remove the following screws securing the metal frame holding the battery.
 - Five 2 mm Phillips screws.
- i** Use either the Phillips #00 or #000 bit to remove the screws.

Step 5




- Remove the grey tape.
 - Unscrew the hidden 2mm screw using the Phillips #000 drill bit.

Step 6




- Remove the second piece of tape from the other ribbon cable connected to the battery.

Step 7

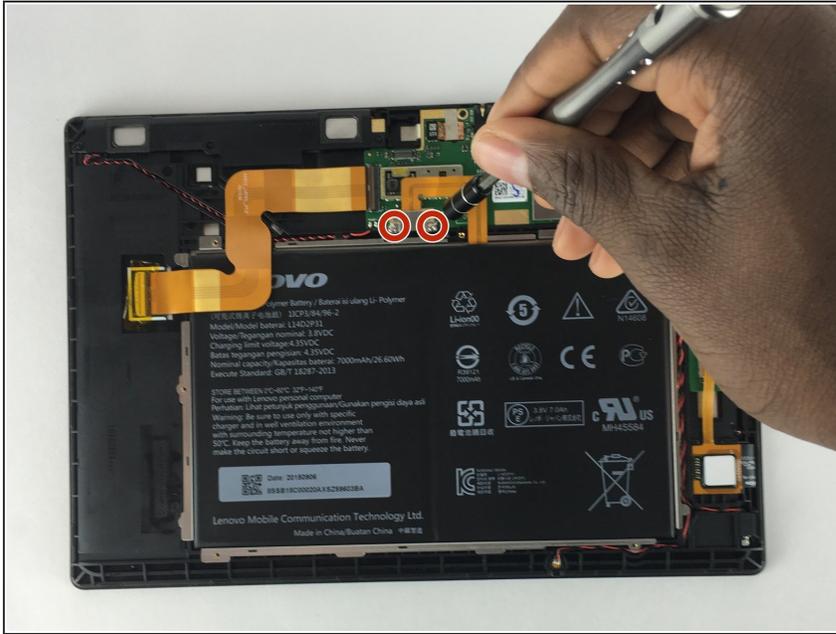

- Remove the screws securing the battery connector cover.
- Two 2mm Phillips screws.

Step 8

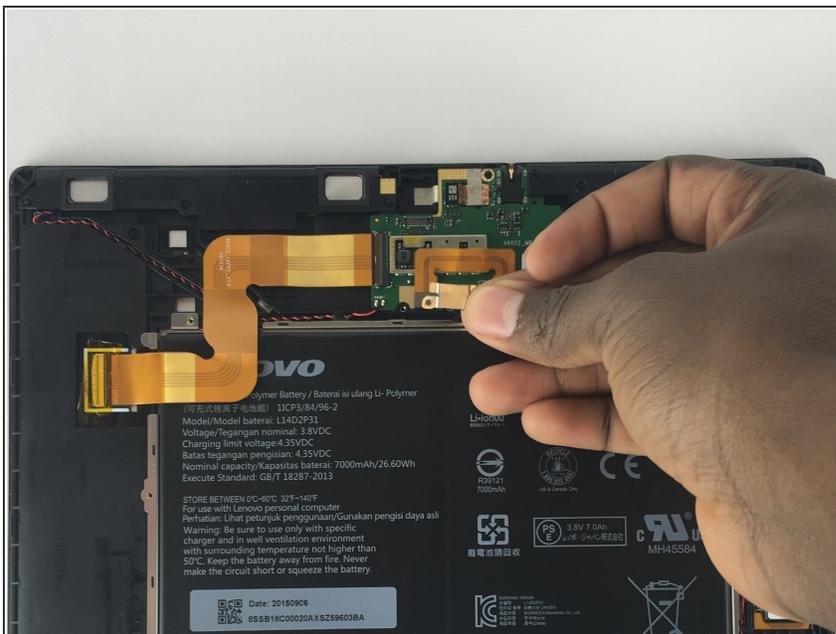

- Once the screws are removed, remove the metal cover shown.

Step 9



- Gently remove the following:
 - Disconnect the battery ribbon cable.

Step 10



- Once the battery ribbon cable is detached, carefully remove the battery.

To reassemble your device, follow these instructions in reverse order.