




# Leapfrog LeapPad 3 Battery Replacement

To replace the battery you will need a...

Written By: Matt Irvine

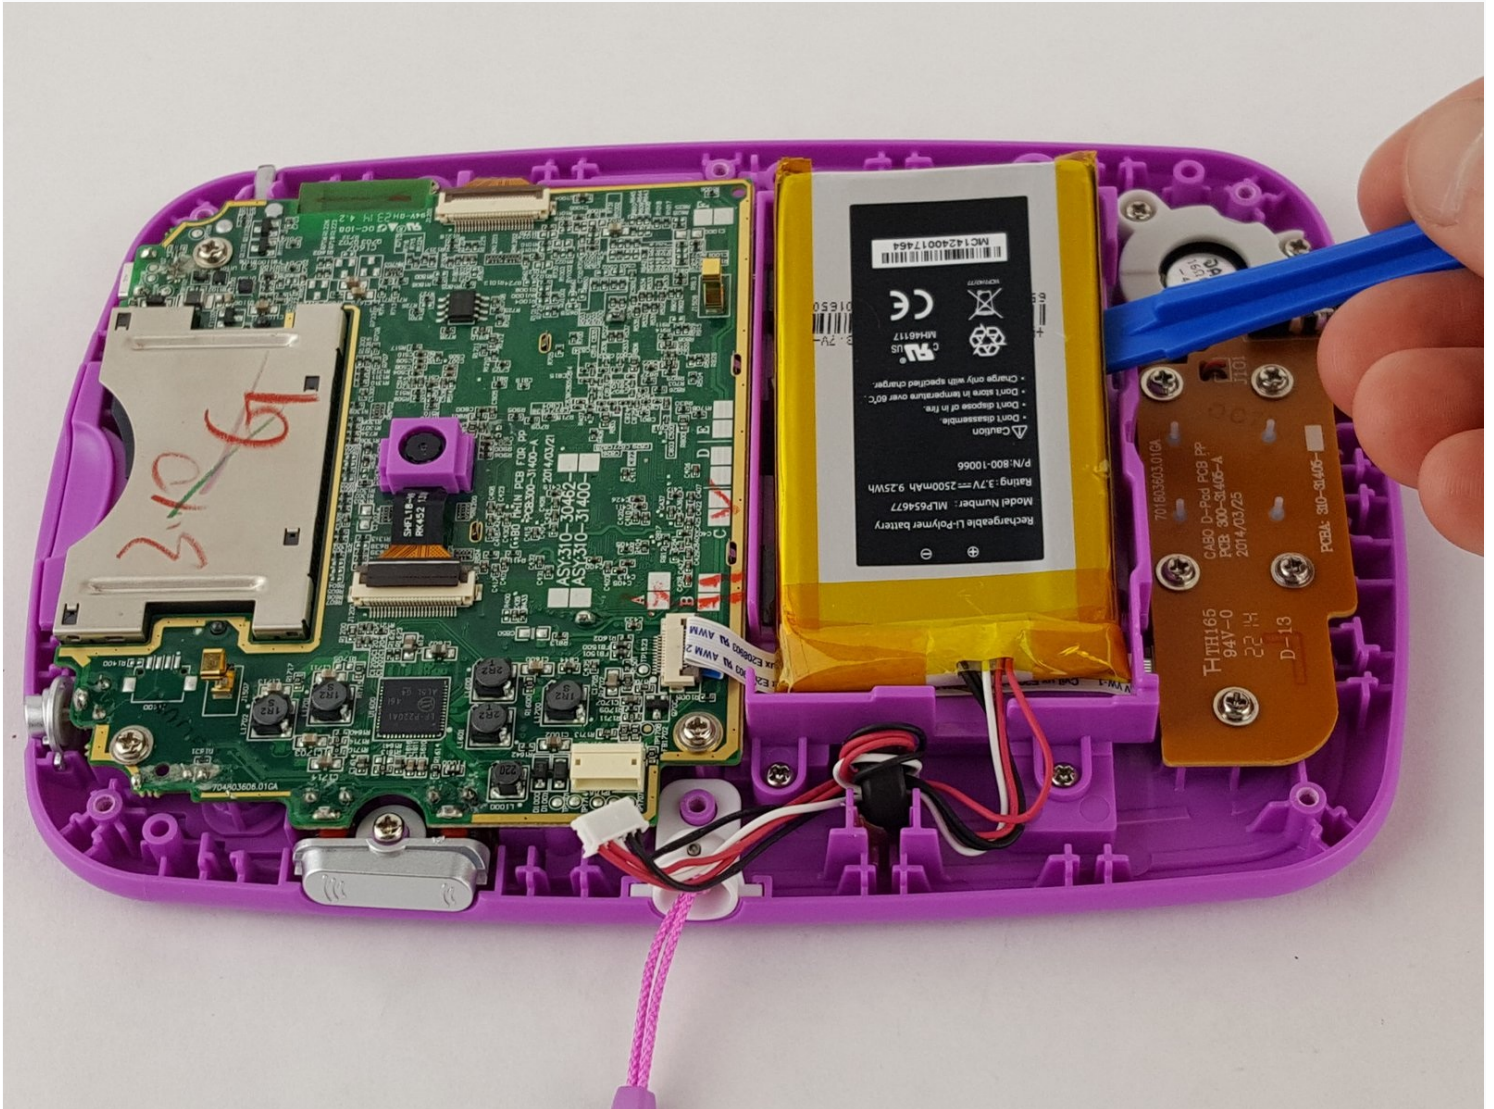

# INTRODUCTION

To replace the battery you will need a replacement. Once you have the battery, following this guide will lead you to a fully functioning device.


## TOOLS:

iFixit Opening Tool (1)

Phillips #0 Screwdriver (1)


Anti-Static Wrist Strap (1)

## Step 1 — Battery

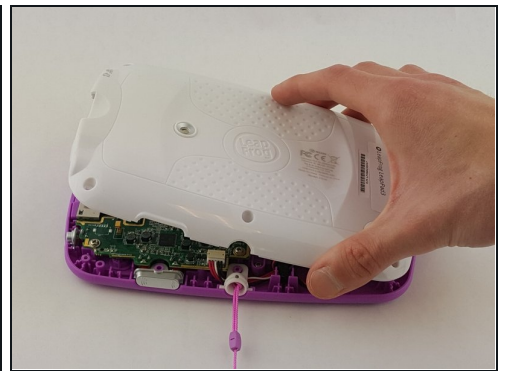

- Before taking apart your device, ensure that it is turned off and that your [anti-static wrist strap](#) is secured to a ground.
- Remove the six 10.0 mm Phillips #0 screws from the outer case and remove the cover with your hands.
- ① You will not need to pry the case off.


## Step 2

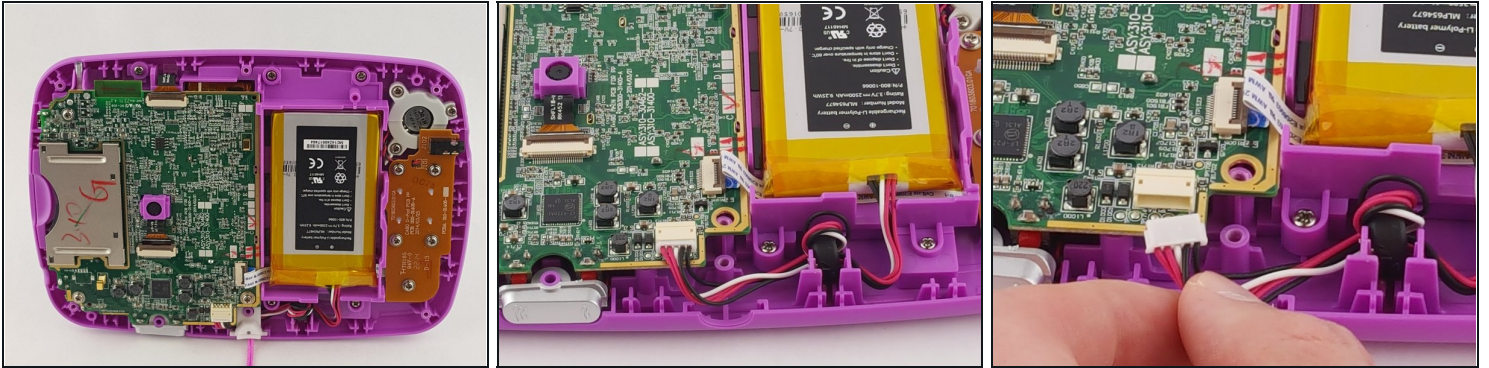

- Unplug the battery from the motherboard with your hands.

ⓘ The battery sits to the right of the motherboard.

## Step 3

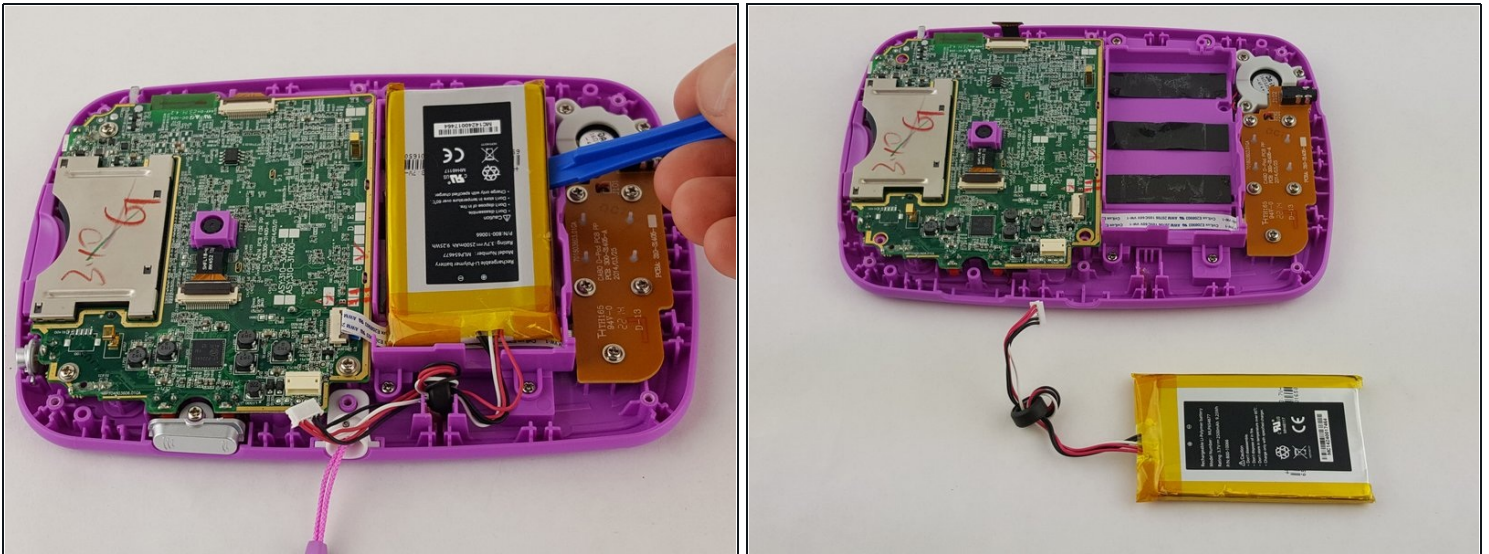

- Pry the battery gently off of the plastic platform with an opening tool.

⚠ Do not to puncture the battery, as the material inside can be dangerous.

To reassemble your device, follow these instructions in reverse order.