




# Nike+ Sportband Motherboard Replacement

If the display on your Nike+ Sportband is defective, you may need to replace the motherboard.

Written By: Alyssa Setnar

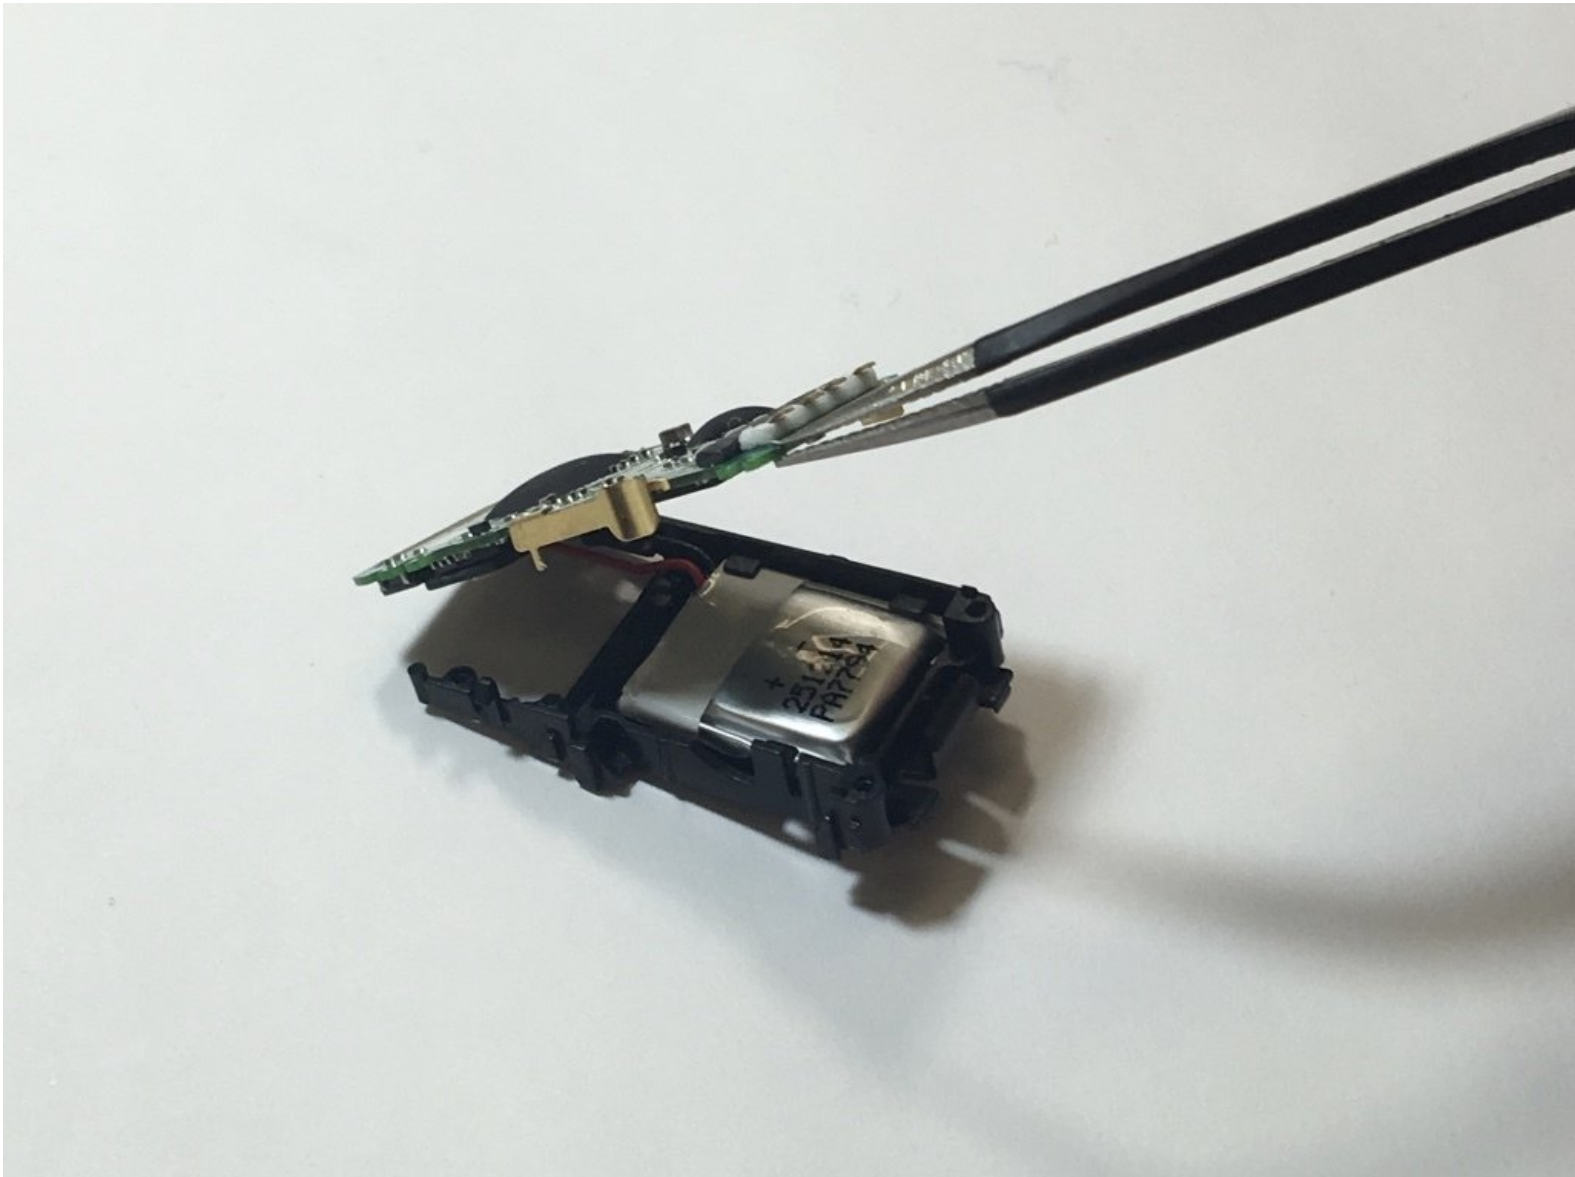

---

## INTRODUCTION

This repair guide will provide the user information needed to remove and replace the motherboard for the NikePlus Sportband. You will need metal tweezers, a metal spudger, and a Phillips #000 screwdriver.

---

### TOOLS:

- [Metal Spudger](#) (1)
  - [Tweezers](#) (1)
  - [Phillips #000 Screwdriver](#) (1)
-

## Step 1 — External Case




- To begin the disassembly of your NikePlus Sportband, first remove the device from the rubber wristband.

## Step 2




- Finish the disassembly of your NikePlus Sportband by utilizing the metal spudger tool on the short edge to pry the external body pieces apart.

### Step 3 — Screen

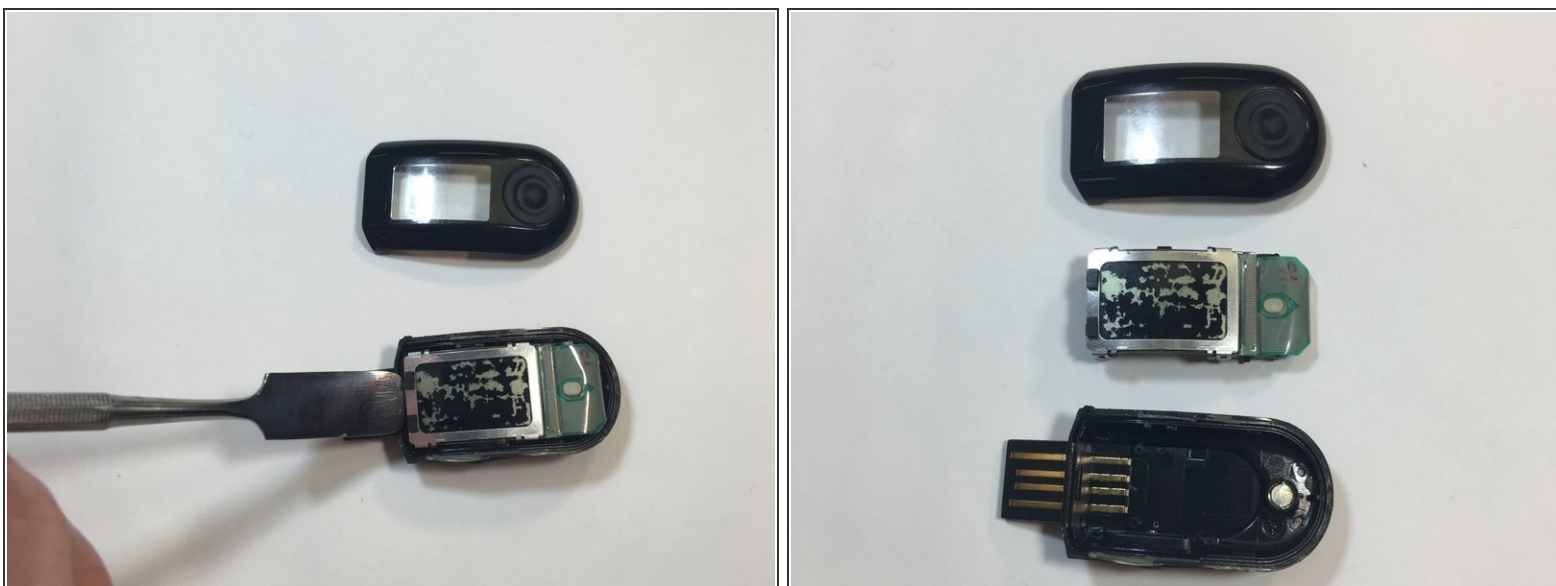

- After the cover had been removed, use the metal spudger tool to remove the body of the device from the casing.


### Step 4

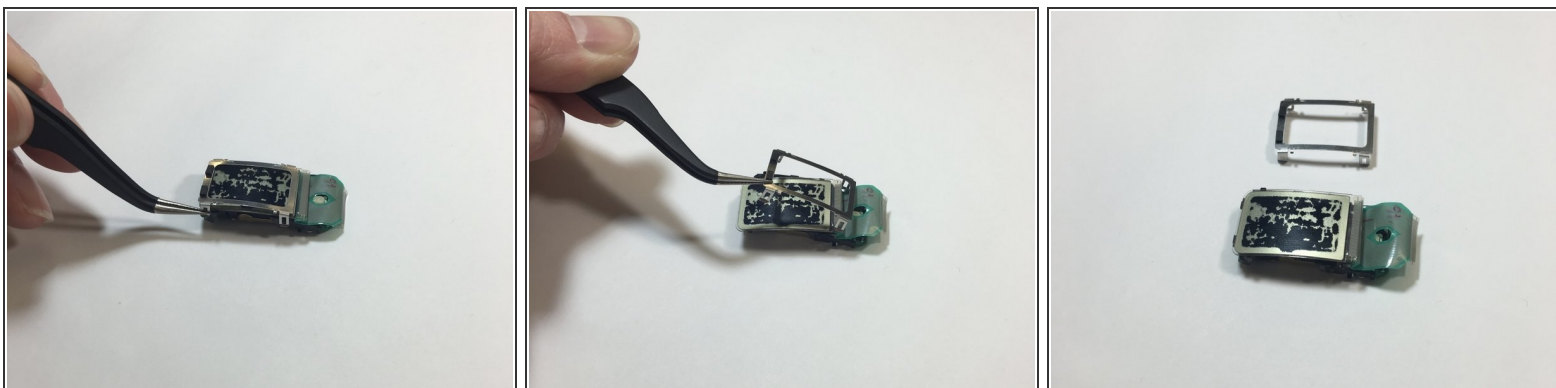

- Use the metal tweezers to pry the screen casing from the body of the device.
- The screen casing is fastened to the body of the device by four clips located in each corner of the casing.




## Step 5

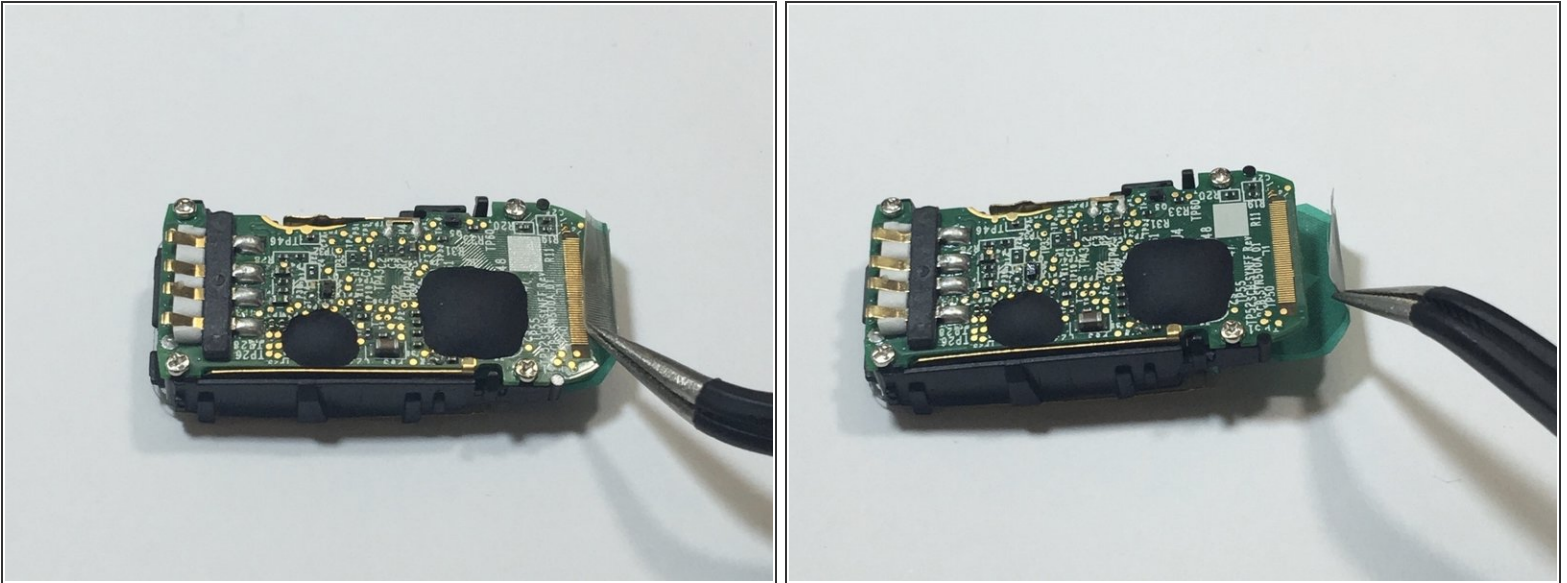


- Flip the body of the device over so that the screen is now on the bottom.
  - The display ribbon cable is soldered to the motherboard. We were able to peel up the ribbon cable with a pair of tweezers.
- ⚠ Successfully resoldering this ribbon cable to the motherboard may prove difficult to the very small traces.

## Step 6

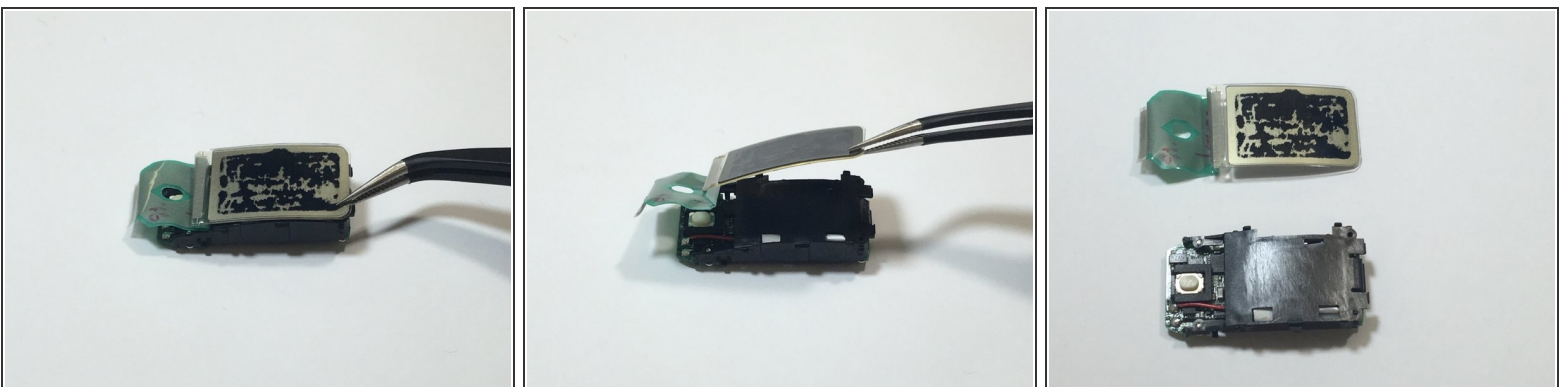




- Flip the body of the device back over so that the screen is facing up.
- Using the tweezers, gently lift the screen from body of the device.

## Step 7 — Motherboard

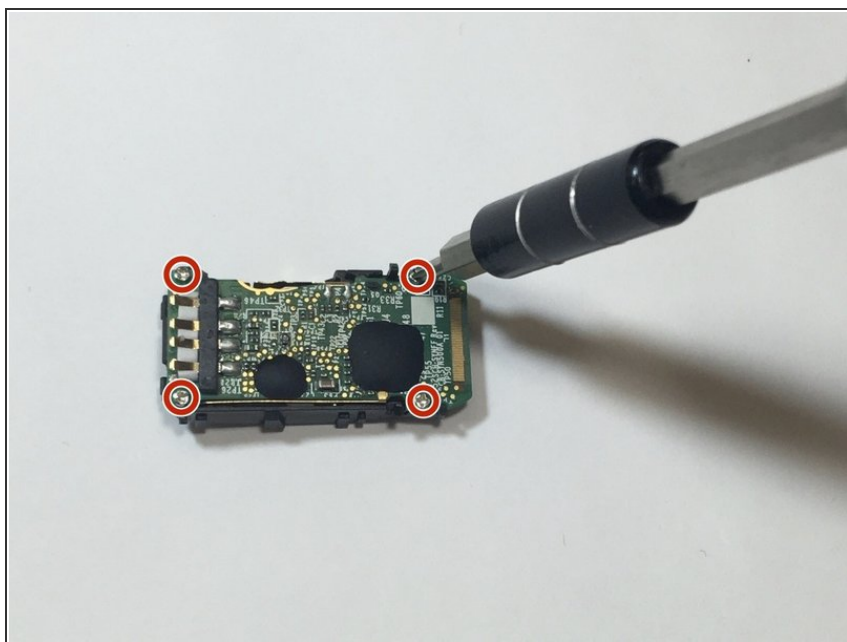

- Remove the four highlighted screws from the motherboard using the Philips screwdriver.

## Step 8

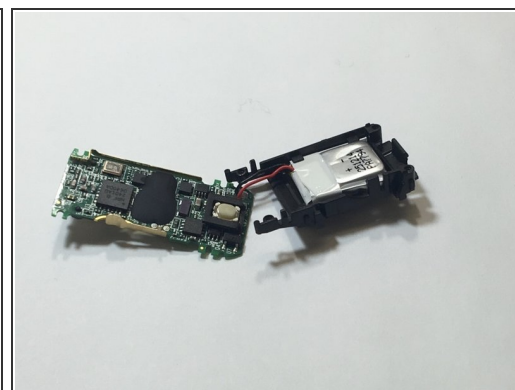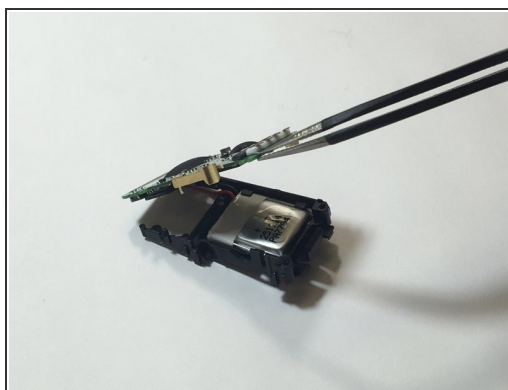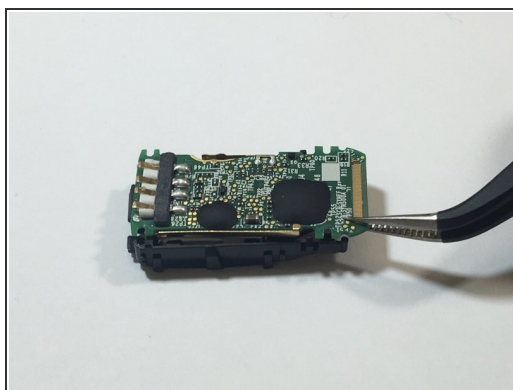

- Use the metal tweezers to lift the motherboard out of the device.

To reassemble your device, follow these instructions in reverse order.