




ATT Trimline 210M Back Cover Replacement

This guide demonstrates the actions necessary to open up the phone by detaching the top shell.

Written By: Juan Carrillo

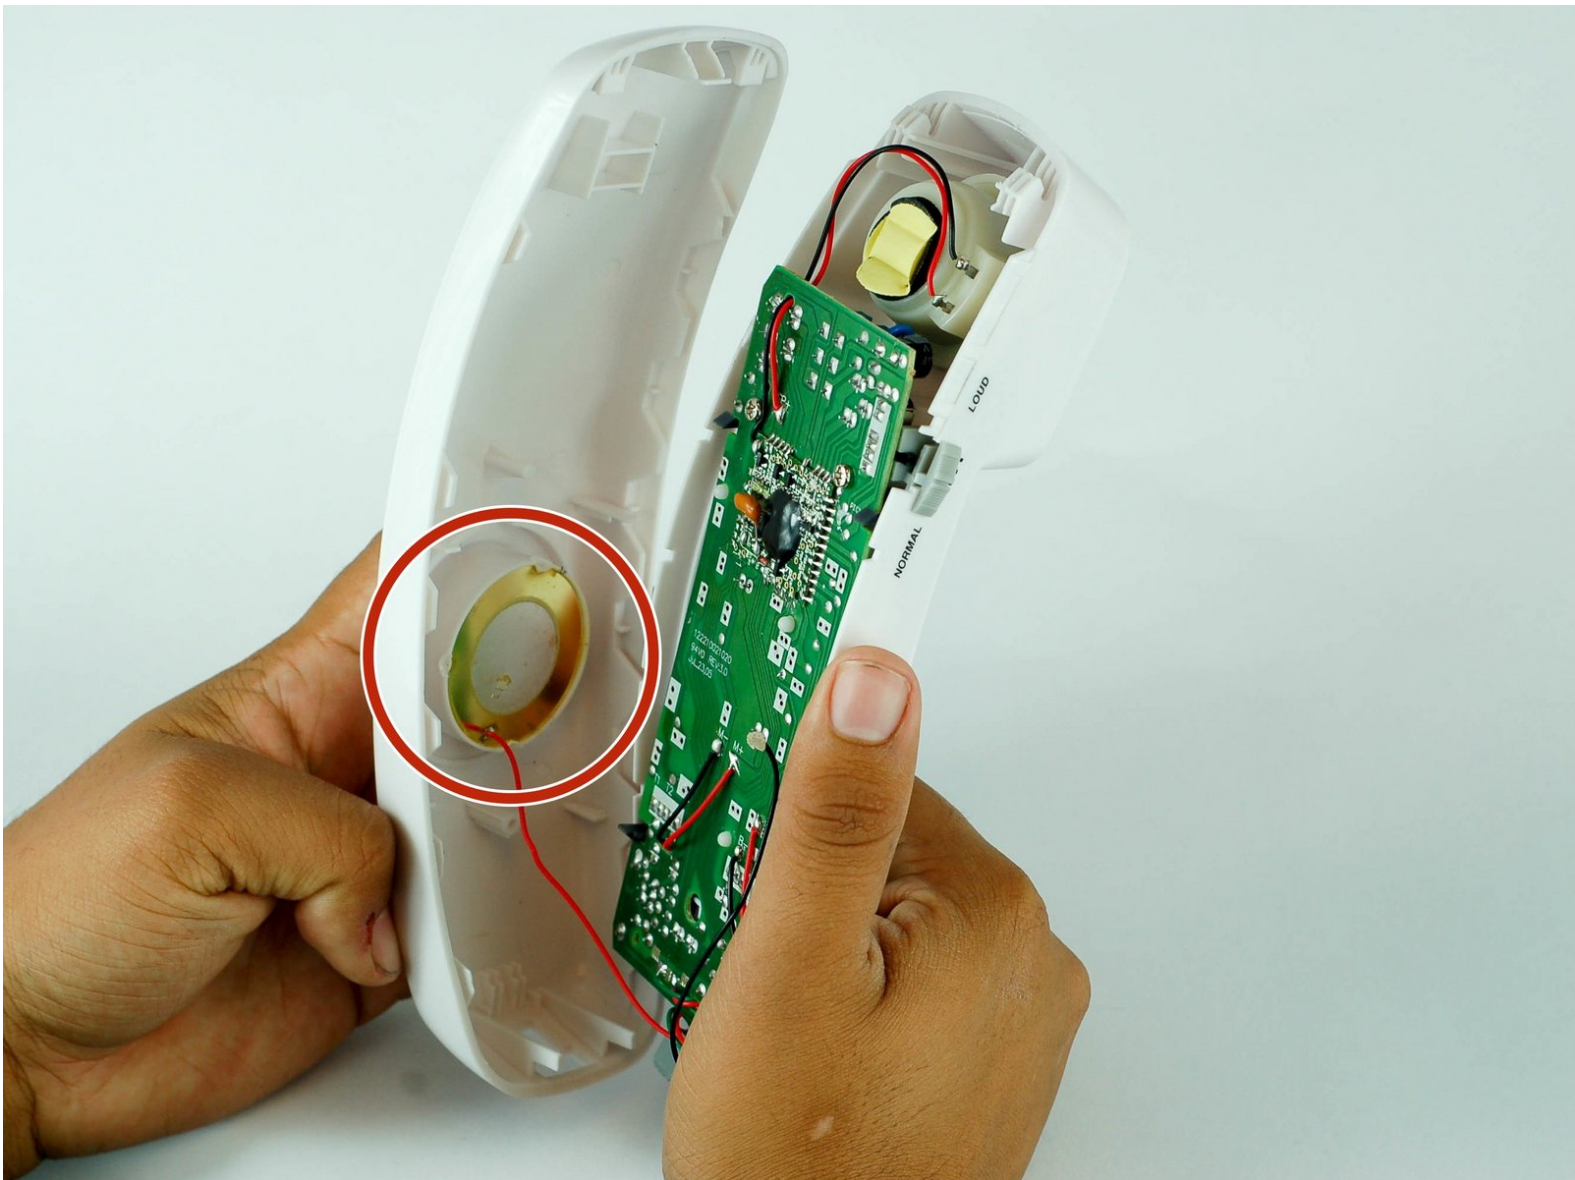

INTRODUCTION

You will need to open up the phone in order to be able to detach the back cover and replace it. This repair might be needed if there is no ring coming from the phone.

TOOLS:

- [Metal Spudger](#) (1)
-

Step 1 — ATT Trimline 210M Back Cover Disassembly



- Open up the phone with a metal spudger, sticking it in the bottom near the cord jack entry.

⚠ Be careful with the amount of force you use, or the plastic may crack.

Step 2



- Pull up on the spudger while simultaneously pulling up the top shell of the phone.


Step 3



- After unclipping the bottom half of the shell, pull upward from the position shown in the picture to detach the top half of the shell.


⚠ The cord connecting the speaker is short, and may detach if not done carefully.

Step 4

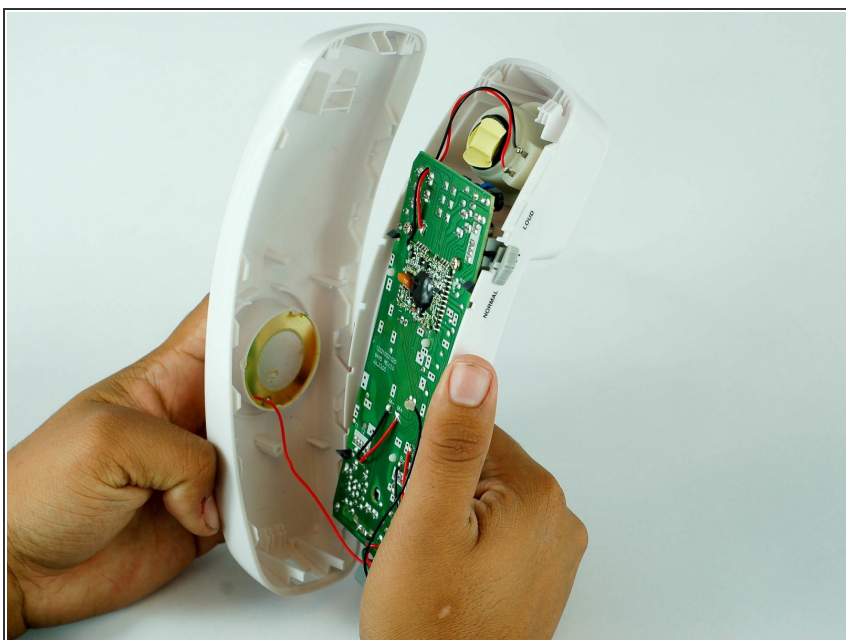

- You will have the motherboard and speaker exposed to you.

Step 5 — Back Cover

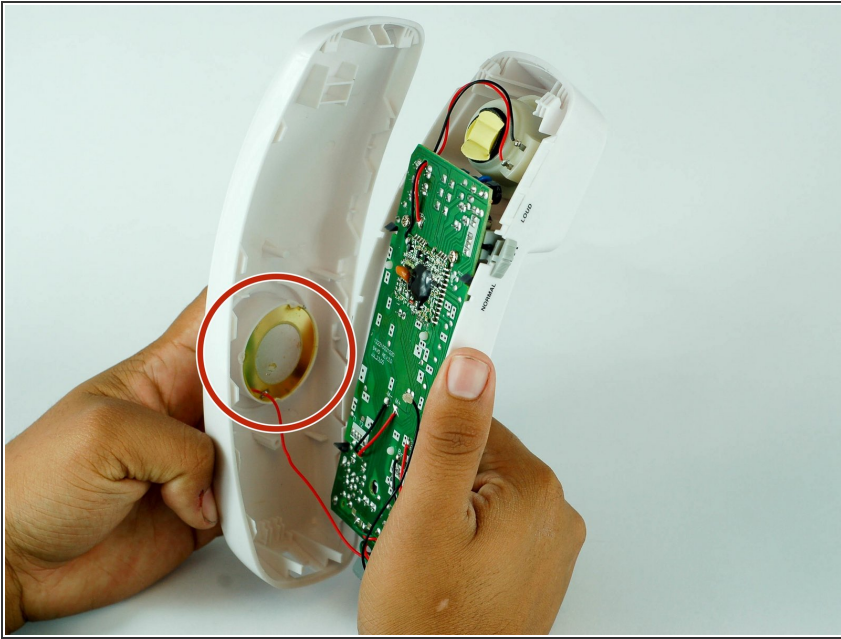

- Detatch the black and red wire from the back cover.

To reassemble your device, follow these instructions in reverse order.