



Bosch 3727DEVS Power Cord Replacement

Purchase a new Power Cord. The sander should be...

Written By: Daniel Riddle



INTRODUCTION

Purchase a new Power Cord. The sander should be unplugged from any power sources. Make sure you organize the removed screws, so you can reinstall them in the correct location.

TOOLS:

T20 Torx Screwdriver Bit (1)
Flathead 3/32" or 2.5 mm Screwdriver (1)

PARTS:

Power Supply Cord (1)


Step 1 — Power Cord



 Ensure that the power chord is not plugged into an outlet.


- Using the T20 Torx Screwdriver, remove the four 15.6 mm screws securing the top cover to the sander.
- Lift the top cover off the sander.

Step 2

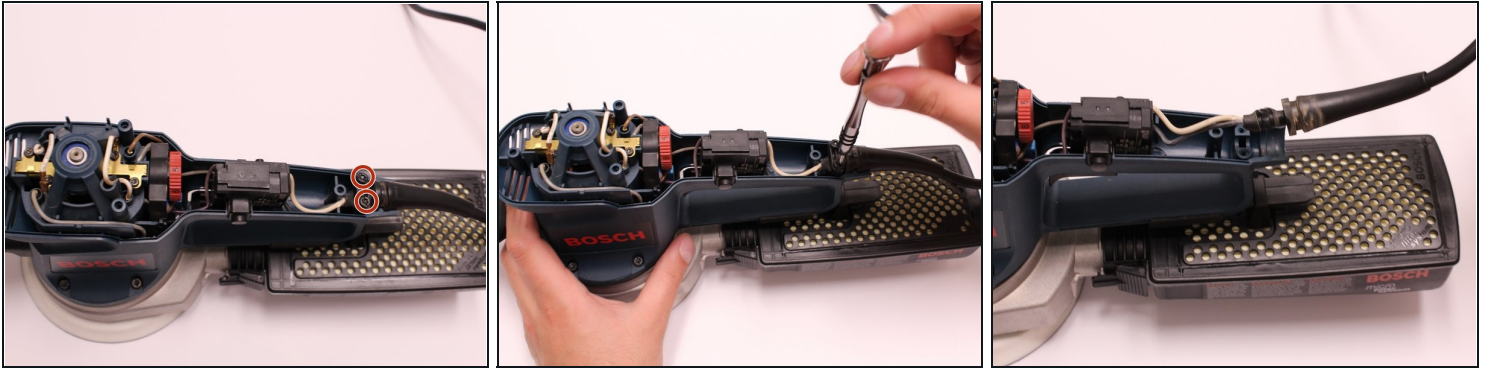

- Using the T20 Torx Screwdriver, remove the two 15.6 mm screws securing the cable clip to the motor housing.
- Lift cable clip and cord from motor housing.

Step 3

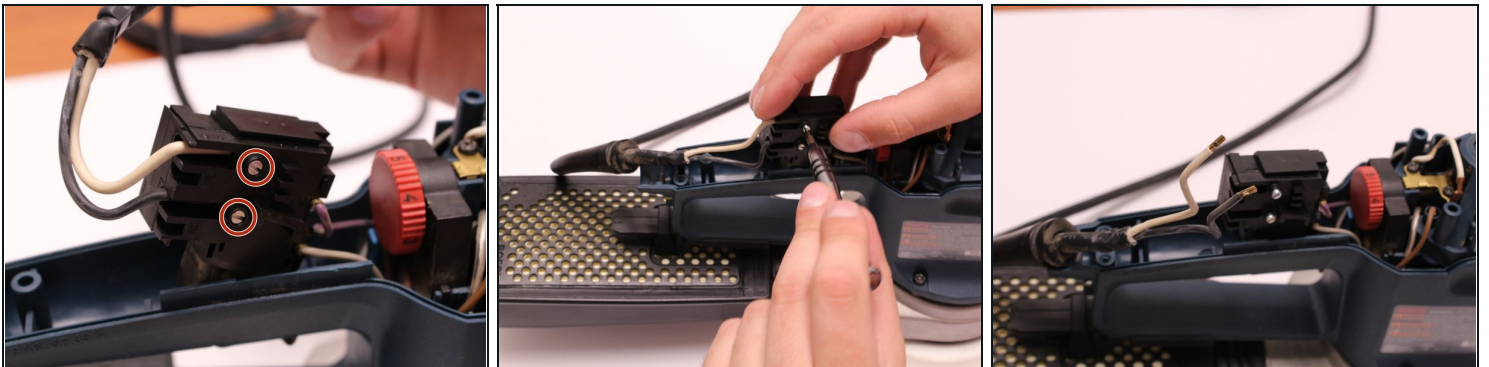

- Using the [2.5 mm Flathead](#) Screwdriver, loosen the two screws securing the white and black wires to the On/Off Switch.

To reassemble your device, follow these instructions in reverse order.