



DeWalt DW920 Lock Switch Replacement

Written By: Stephen Rada





TOOLS:

TR10 Torx Security Screwdriver (1)


H5.0 bit Driver (2)

Step 1 — Disassembly



- Using an H-5.0 bit driver remove the four T-10 Torx screws.

Step 2

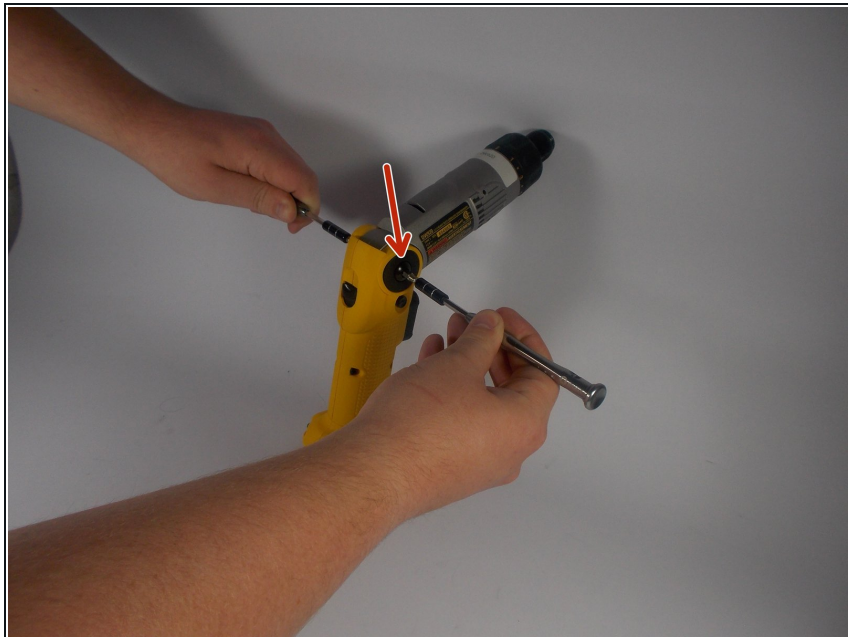

- Use 2 H-5.0 bit drivers to take out the main bolt and head.
- ⓘ There will be blue locktite on the tread.

Step 3





- Carefully remove the two halves of the handle.

Step 4 — Lock Switch



- Locate the switch on the top of the drill right before the bending joint.

Step 5

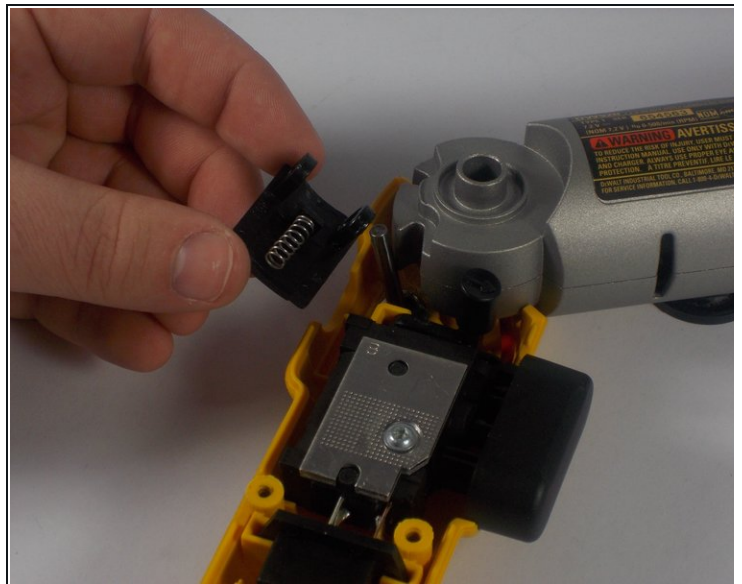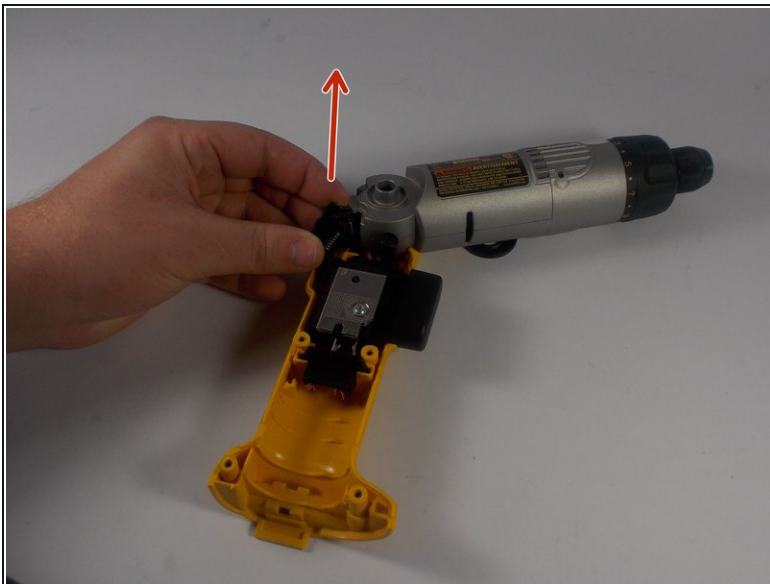

- Firmly grasp the switch with two fingers and lift it straight up. The spring should remain attached to the switch during this process.

 It should lift right out. If it is caught on anything do not force it out.

To reassemble your device, follow these instructions in reverse order.