




ATT Trimline 210M Microphone Replacement

We will show you how to replace the microphone in your telephone.

Written By: Corey

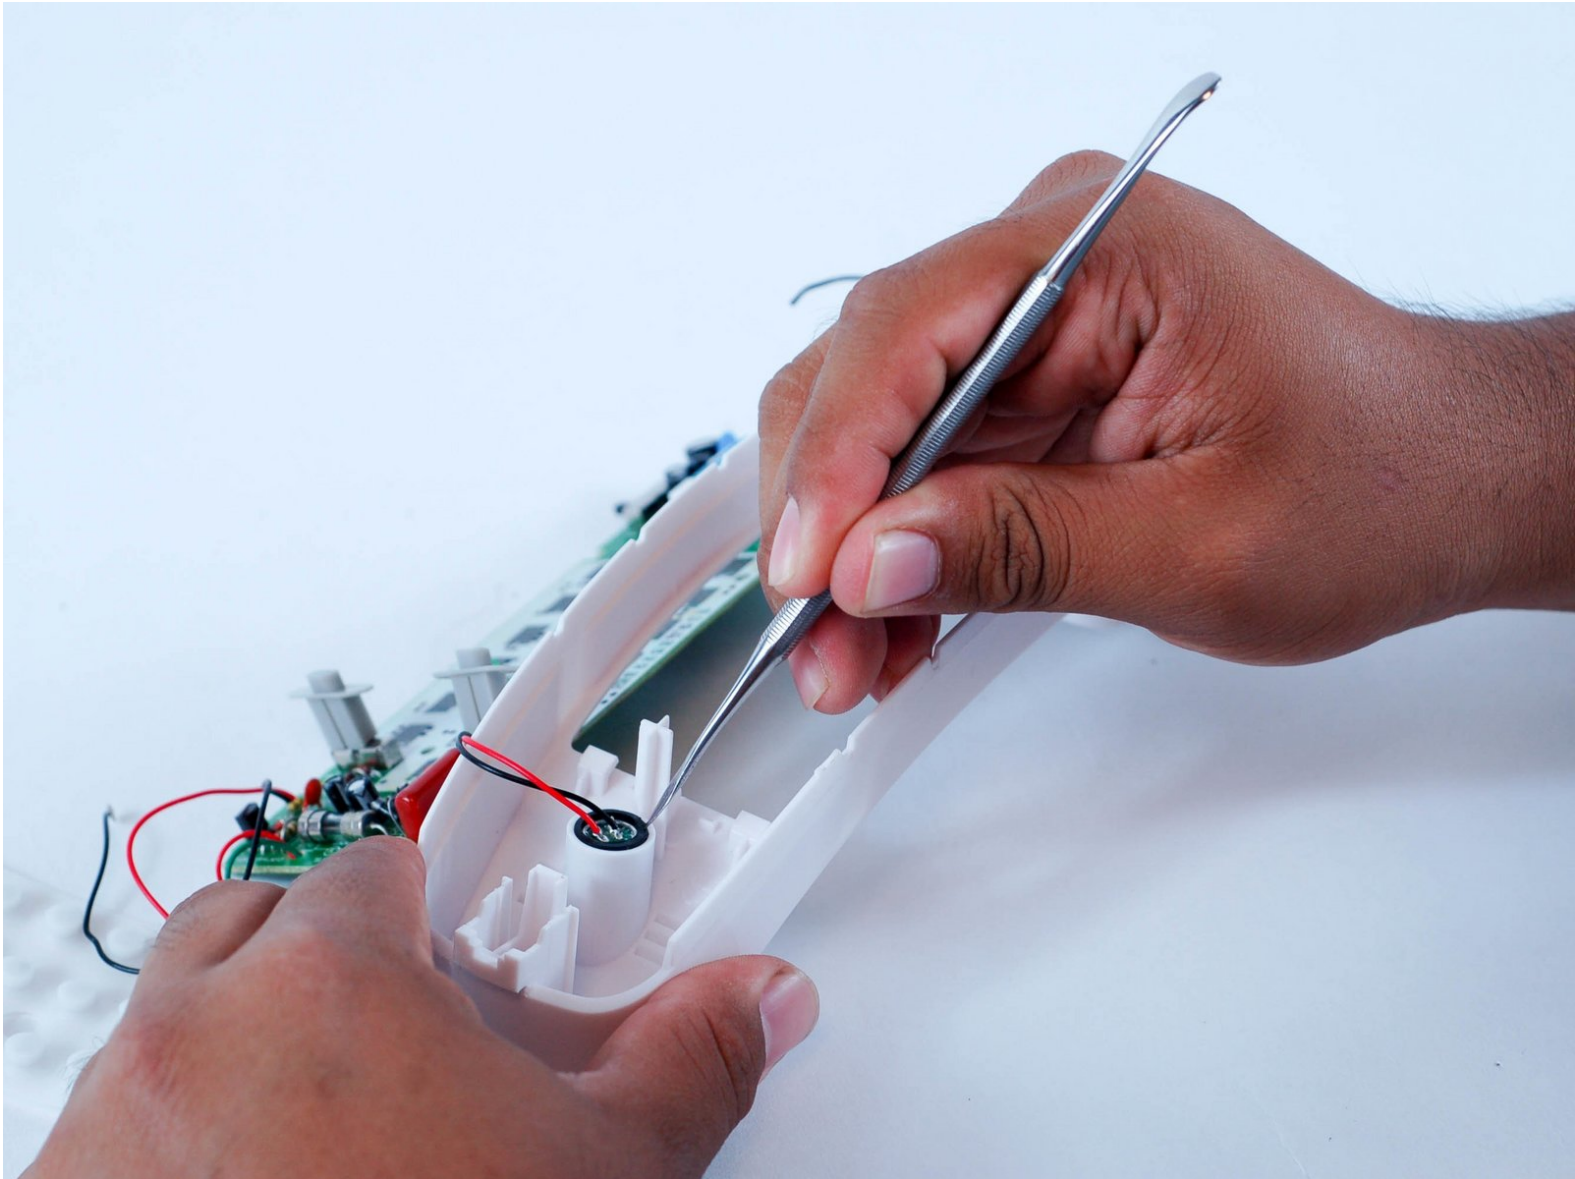

INTRODUCTION

You will learn how to replace the microphone on the phone. You may need to replace the microphone if people on the other side of the line are unable to hear you consistently.

TOOLS:

- [Metal Spudger](#) (1)
- [1/4" Nut Driver](#) (1)
- [JIS Driver Set](#) (1)

J1

Step 1 — ATT Trimline 210M Back Cover Disassembly



- Open up the phone with a metal spudger, sticking it in the bottom near the cord jack entry.

⚠ Be careful with the amount of force you use, or the plastic may crack.

Step 2



- Pull up on the spudger while simultaneously pulling up the top shell of the phone.


Step 3



- After unclipping the bottom half of the shell, pull upward from the position shown in the picture to detach the top half of the shell.


⚠ The cord connecting the speaker is short, and may detach if not done carefully.

Step 4

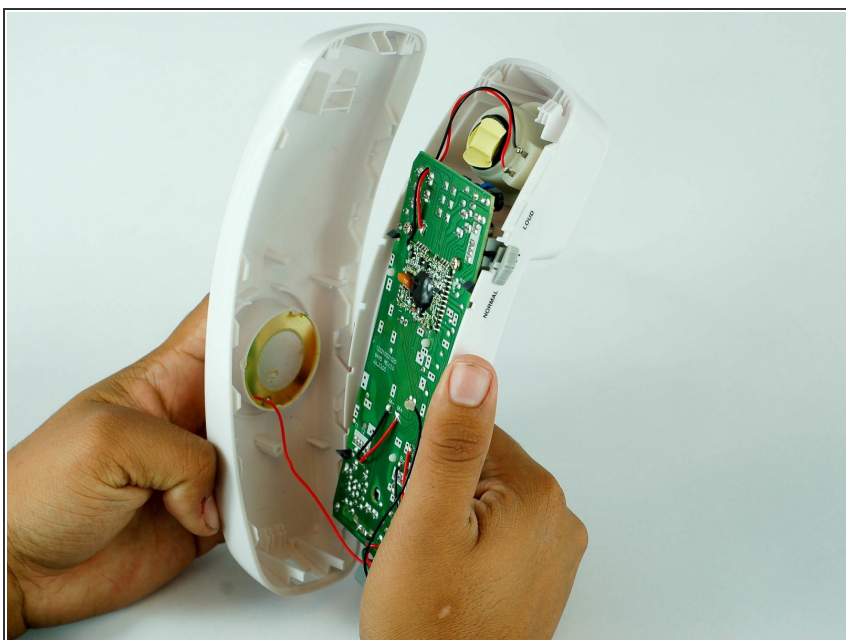


- You will have the motherboard and speaker exposed to you.

Step 5 — ATT Trimline 210M Motherboard Disassembly

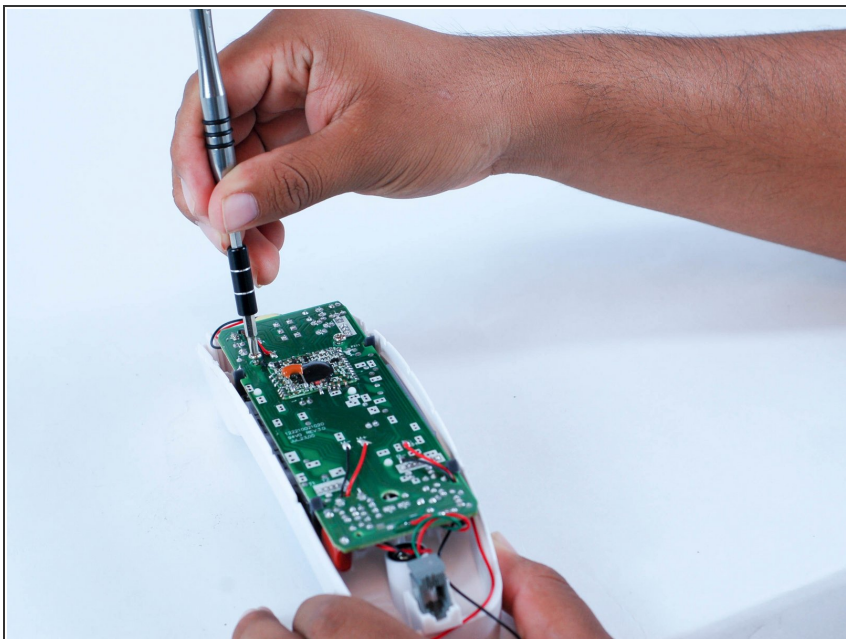


- Remove the two 10 mm screws using the 1/4" driver and a J1 Phillips screw head.

Step 6

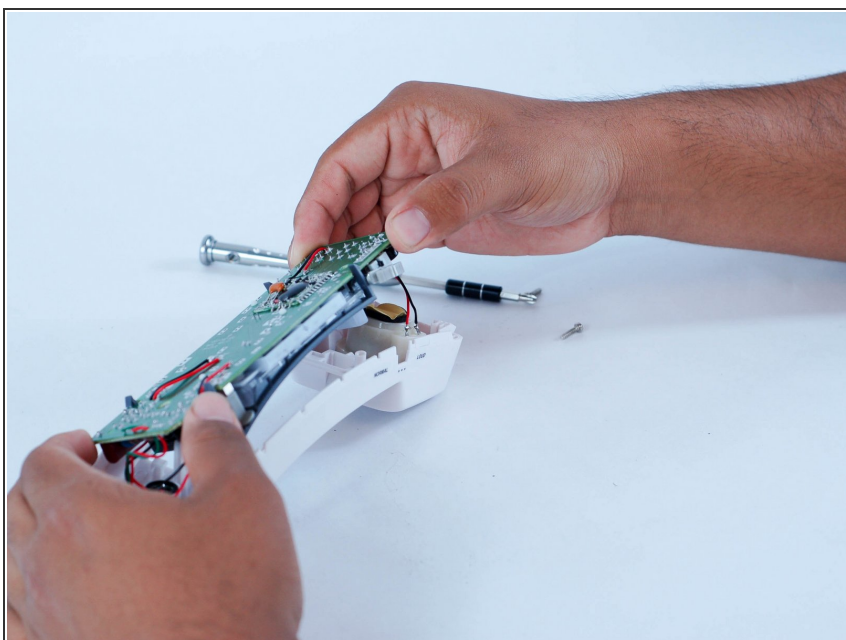


- Carefully move the motherboard up to remove it.

Step 7 — Microphone

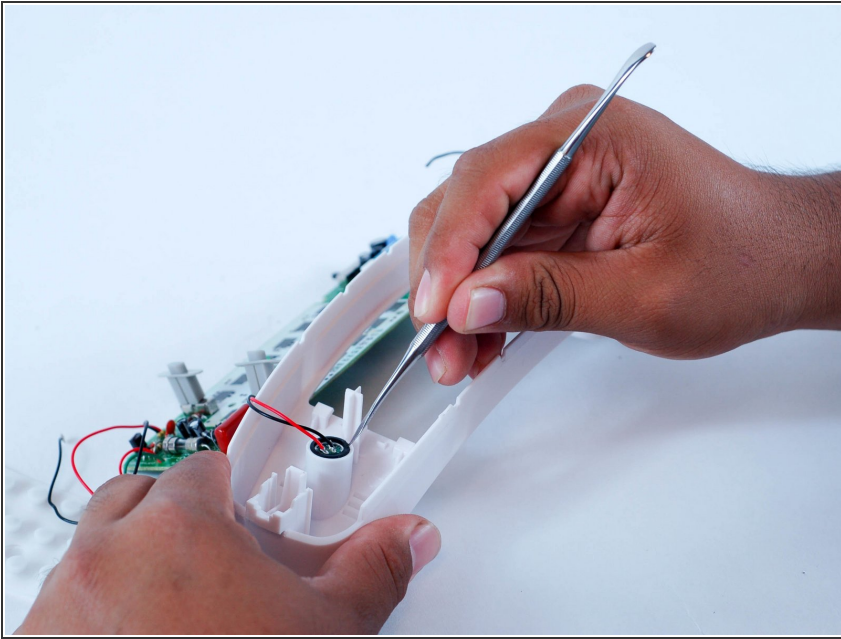

- Use metal spudger to remove the microphone

Step 8

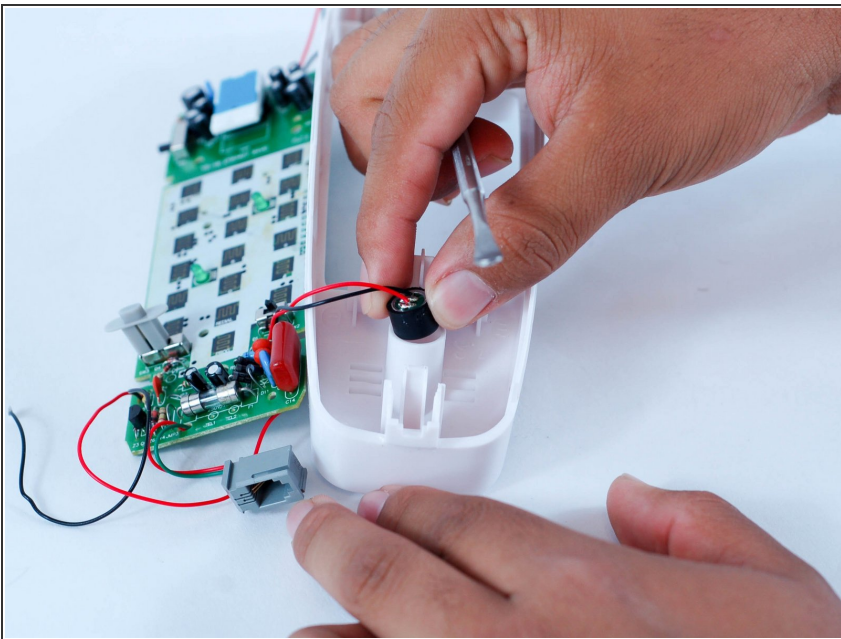

- Carefully detach the black and red wires.

To reassemble your device, follow these instructions in reverse order.