



DeWalt DW920 Disassembly

Before going into replacing anything on this...

Written By: Cameron MacKinnon



INTRODUCTION

Before going into replacing anything on this drill you will want to read through this guide in order to properly disassemble the drill. Following these steps will be your first step in most replacements.

TOOLS:

Tournevis Torx Security TR10 (1)


H5.0 bit Driver (2)

Step 1 — Disassembly



- Using an H-5.0 bit driver remove the four T-10 Torx screws.

Step 2

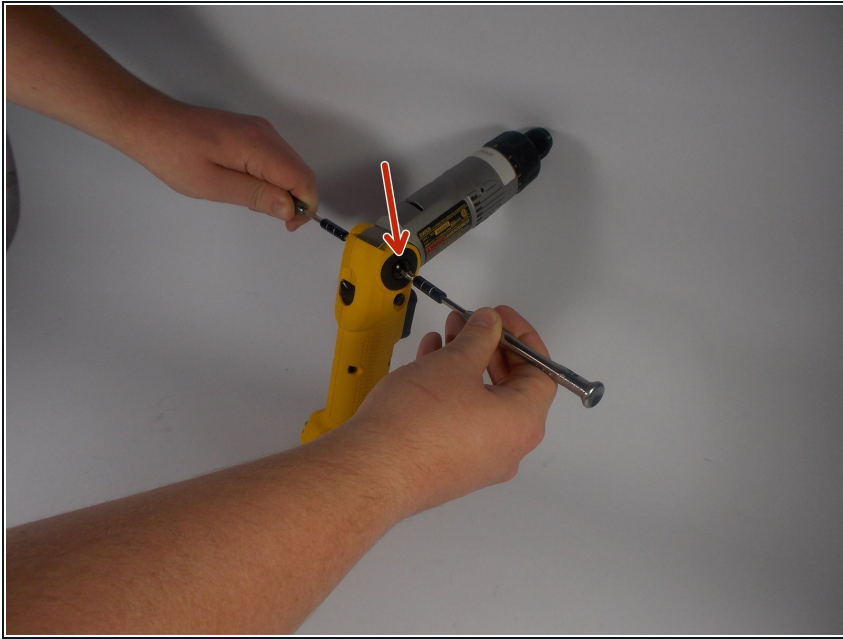

- Use 2 H-5.0 bit drivers to take out the main bolt and head.
- ⓘ There will be blue locktite on the tread.

Step 3



- Carefully remove the two halves of the handle.

To reassemble your device, follow these instructions in reverse order.