



HTC Maple 100 Back Panel Replacement

How to replace the HTC Maple 100 back panel.

Written By: Andrew Van Meter



INTRODUCTION

Remove 4 Torx screws and 2 #00 Philips

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — Battery



- First remove the back cover of your phone to expose the battery.

Step 2



- Turn the phone over.
- Push forward on the battery with your thumb.

Step 3



- Take the battery out by lifting it upwards.
- ☑ When reassembling, make sure that the battery contacts match up.

Step 4 — Back Panel




- Remove the four 4.9mm T6 Torx screws that secure the back panel to the rest of the phone.

Step 5



- Remove the two 4.3mm Phillips #00 screws that secure the back panel to the rest of the phone.

Step 6

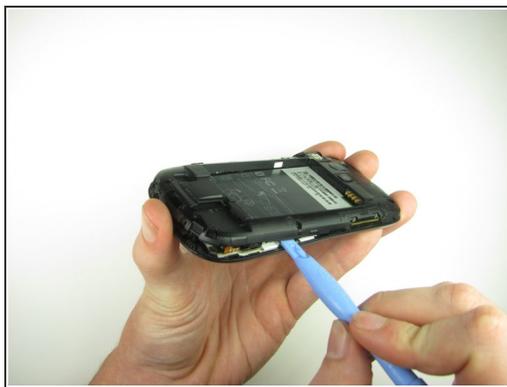

- Insert the plastic opening tool along the seams at different points to pry the clips off.
- ⓘ This may require a bit of force. The USB port cover may fall off in this step.

To reassemble your device, follow these instructions in reverse order.