



# Motorola Razr V3c Face-Screen Replacement

rough draft.

Written By: Nigel



---

# INTRODUCTION

rough draft



## TOOLS:

- [1.5mm Hex Screwdriver](#) (1)
-

## Step 1 — Face-Screen



- Clear a table or desk to use as a workspace. You will need a container to place small screws as they will be used in reassembly.

## Step 2



- Open the phone's face.




### Step 3



- Unscrew the four screws located around the face plate using a 1.5mm Hex tool.

### Step 4

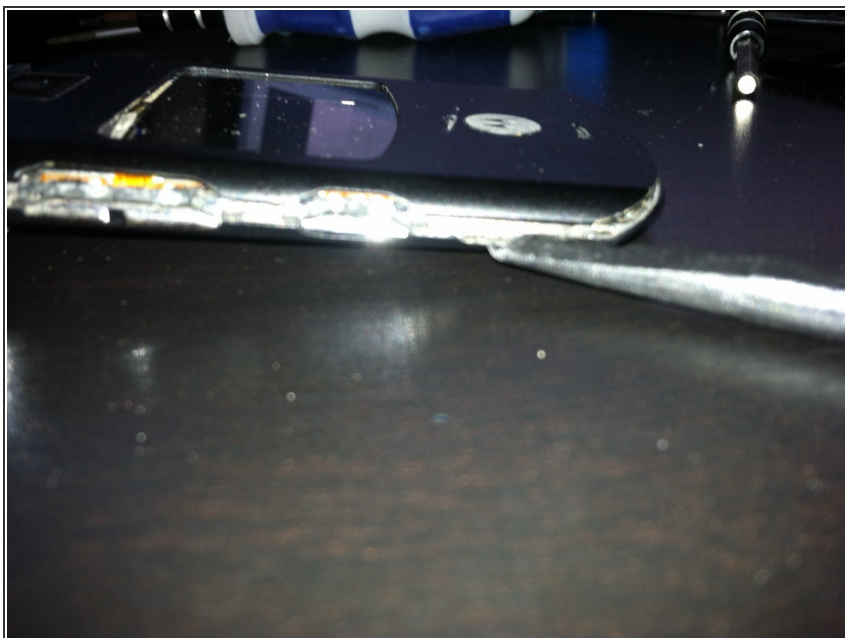

- After removing the screws, use a flat surfaced tool to take the face-screen off.

## Step 5



- Use this step as a checkpoint. Once the face-screen cover is off, the workspace should resemble this step's picture.

## Step 6



- Carefully remove the face-screen using your fingers.

## Step 7



- You may now carefully install a functioning face-screen.

## Step 8



- After securing the face-screen into the casing, place the face screen cover back on.



## Step 9



- Screw in the four corner screws.  
After completion of this step, your phone should function properly.  
Enjoy!

Enjoy your newly inserted face-screen.