



MJS T2702 Screen Replacement

If your screen or keys seem to freeze up and not work, you may need to replace your screen to your device. This guide does not require any significant technical prerequisites. This repair guide is simple and easy, and does not require heavy duty work.

Written By: Katalina Benecke






TOOLS:

- [Soldering Iron](#) (1)
 - [Spudger](#) (1)
 - [Phillips #000 Screwdriver](#) (1)
-

Step 1 — Battery

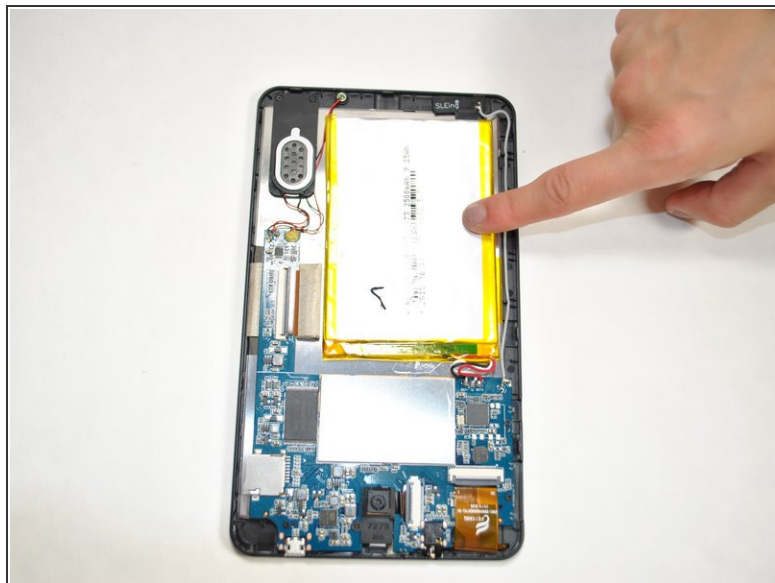


- Separate the back of the device from the face by inserting the flat end of the nylon spudger into the corner of the device to safely pry it open.

Step 2




- Use the nylon spudger to gently pry out the battery.

Step 3

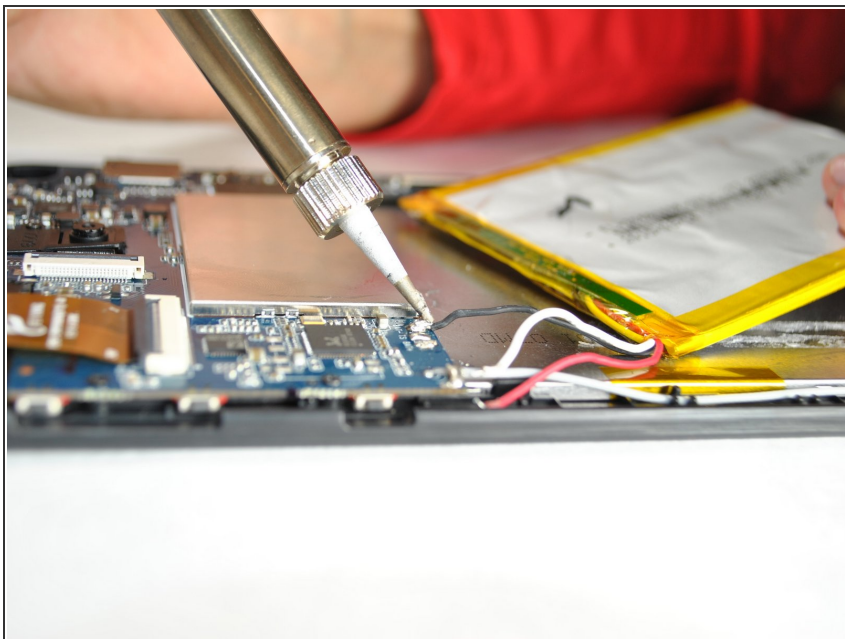

- Solder the wires off that are on the battery. Use the [solder technique guide](#) for helpful tips!

Step 4 — Screen

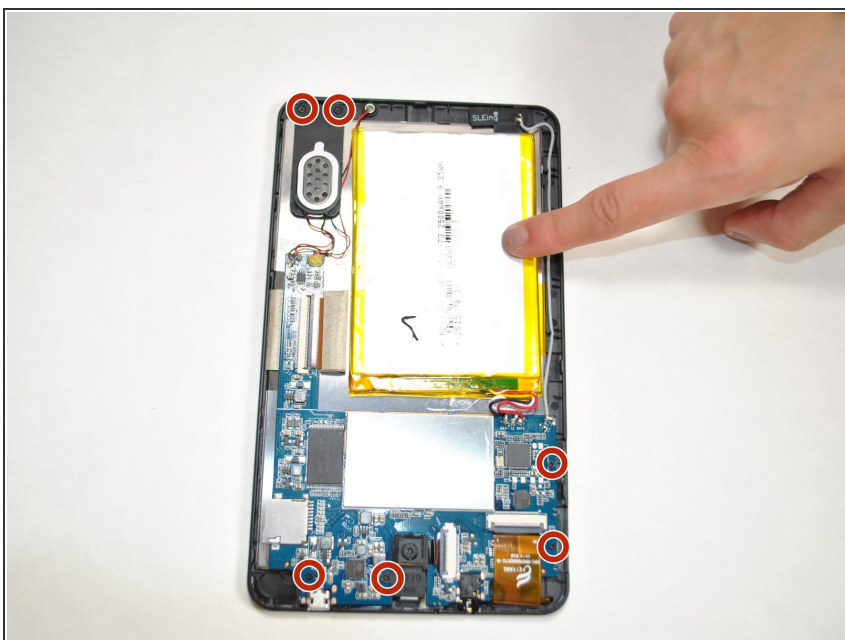


- Remove the 4.1 mm screws from the motherboard using the J #000 Phillips Screwdriver.

Step 5



- Carefully remove the tape connected to the back of the screen and the motherboard.

Step 6

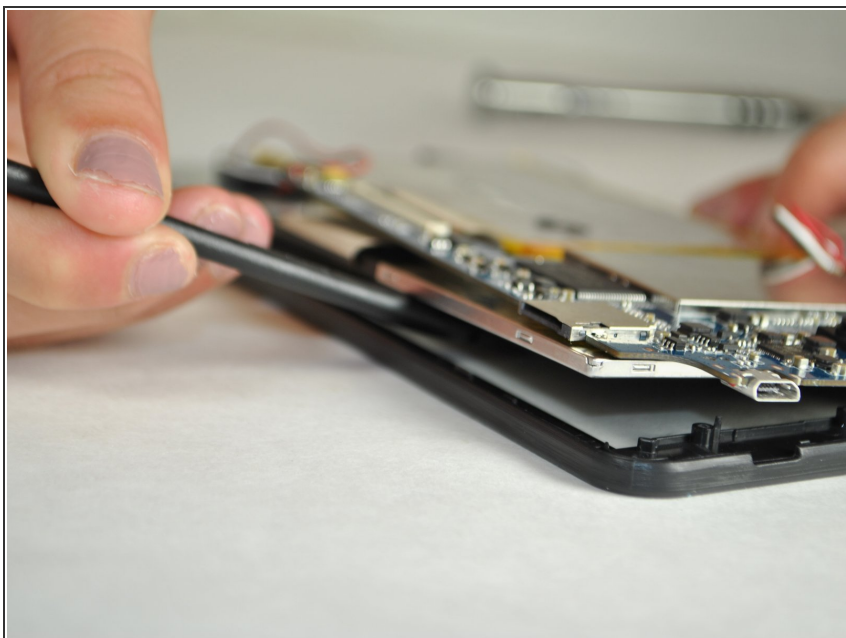

- Use the nylon spudger to separate the screen from the plastic casing.

To reassemble your device, follow these instructions in reverse order.