



Replace Front Panel

Written By: You Zhou



 **TOOLS:**

- [Phillips #00 Screwdriver \(1\)](#)
 - [iFixit Opening Picks \(Set of 6\) \(1\)](#)
-

Step 1 — Battery



- Slide the back cover down towards the bottom of the phone to remove.

Step 2



- Pull the top of the battery towards you to remove it from the phone.

Step 3 — Front Panel




- Unscrew the two screws located at the bottom of the phone.
- ⓘ Use a PH00 Phillips head to remove the 9 mm screws.

Step 4



- Separate the back cover from the front cover by using a wedge.
- Remove the back cover from the front cover by pulling them apart.

Step 5

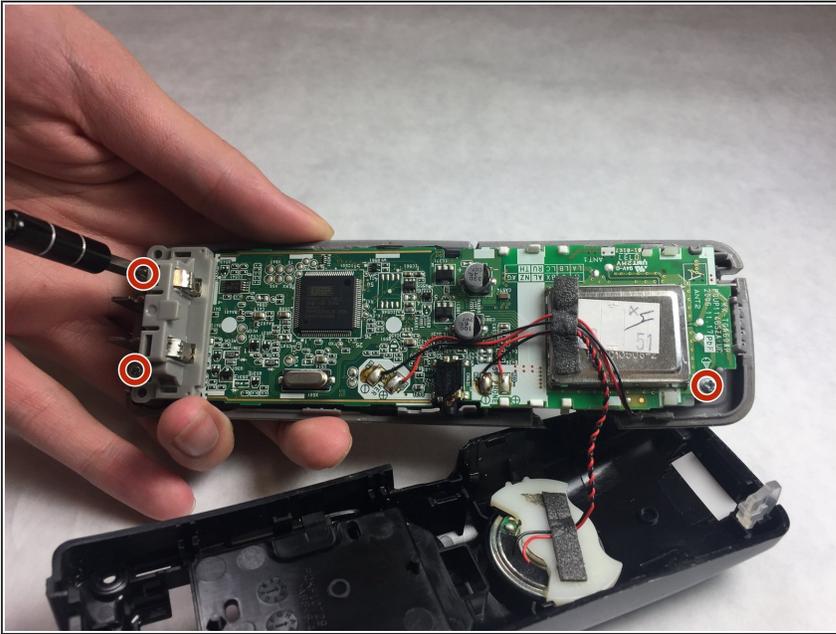

- Remove three screws on the motherboard.
- Pull the phone face off of the motherboard.

To reassemble your device, follow these instructions in reverse order.