



# Vizio VTAB1008 Battery Replacement

Hello! This guide will show you how to replace...

Written By: Gilberto Ambriz



# INTRODUCTION



Hello! This guide will show you how to replace the battery in a Vizio VTAB1008.

## TOOLS:

[iFixit Opening Tool](#) (1)

[Tweezers](#) (1)


### Step 1 — Vizio VTAB1008 Back Cover Removal

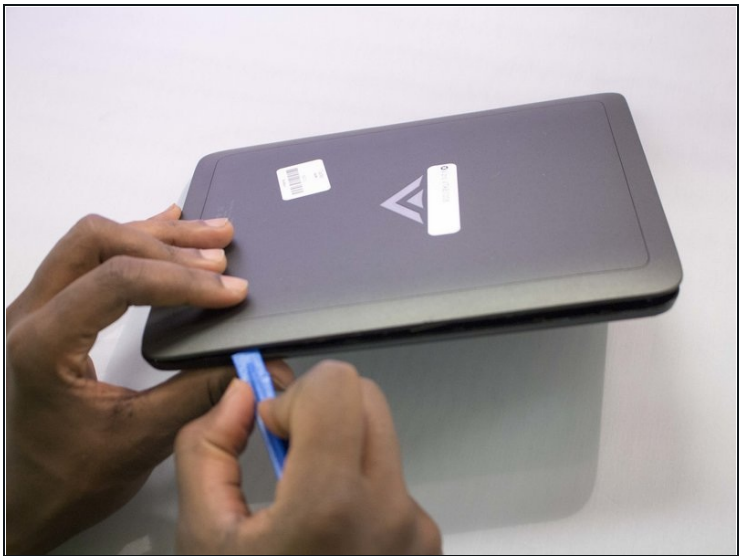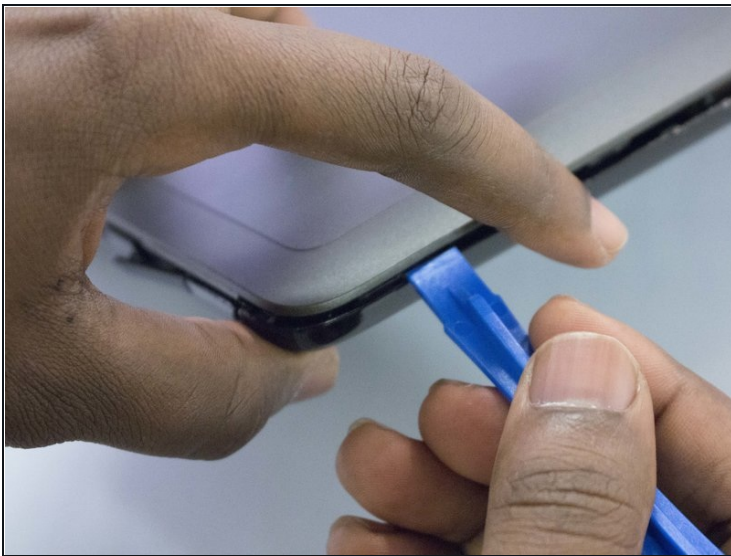

- Carefully slide the heavy duty opening tool between the gap on the side of the device with no buttons.
- ① Do not insert the opening tool too far into the tablet as this can damage connectors close to edges of the cover.
- ① The angled tip of the opening tool can be wedged into the device by pressing on the back of the opening tool with the thumb. Move the opening tool in a sliding motion to ensure all tabs separate.
- Corner tabs may require a more forceful prying tool. If needed, carefully insert the metal prying tool into corners to separate the tabs.






## Step 2

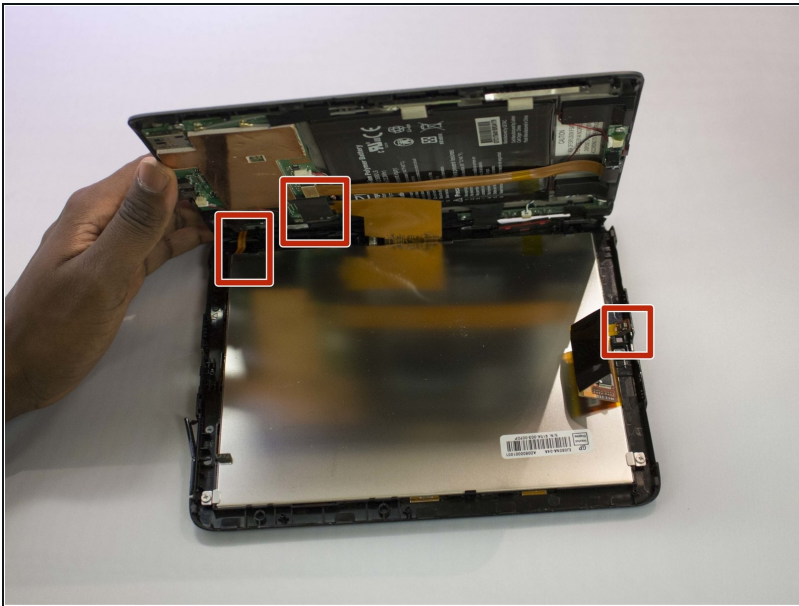



- Look into the tablet for loose connectors.
- ① There are three loose connectors: one for the screen, one for the digitizer, and one for the motherboard. They are held in place by the pressure of the backing and screen assemblies.
- Flip the backing from the button-less side over, being careful not to separate the ribbon connector from the display screen.

## Step 3 — Battery

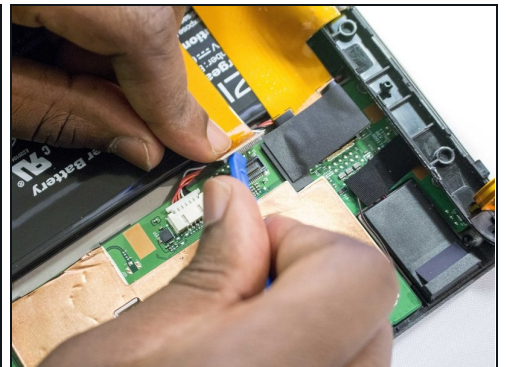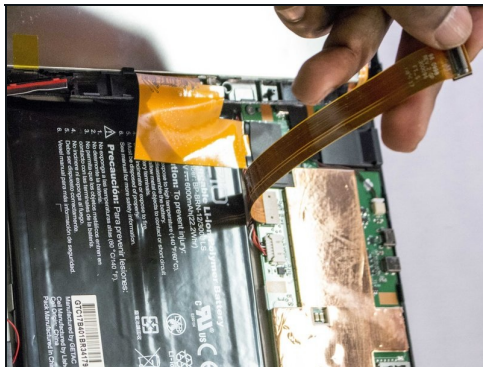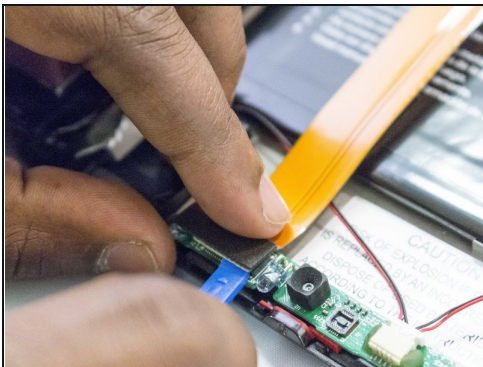



- Remove the ribbon strip that crosses the battery from both ends.
- ① A blue opening tool may be used to assist.

## Step 4

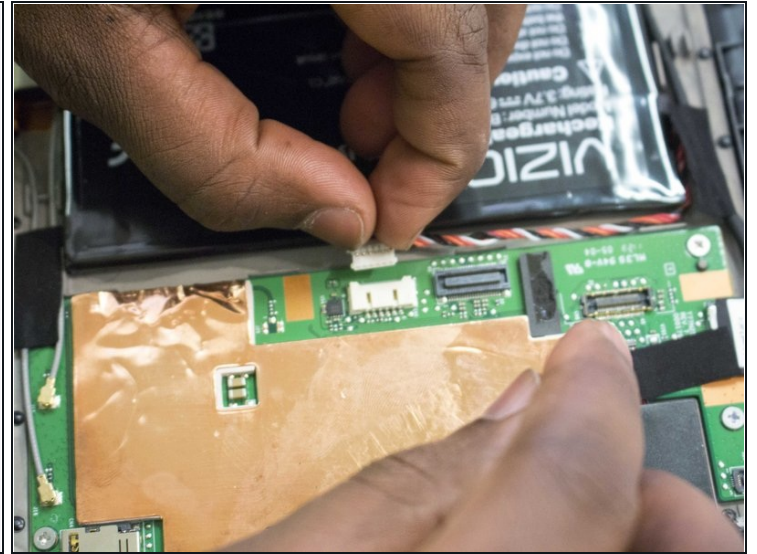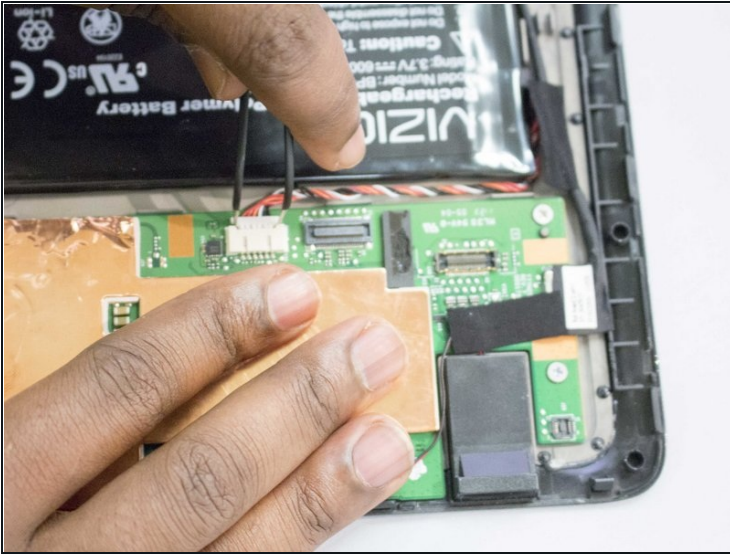

- Remove the connector at the top of the motherboard by pulling out and away from the motherboard.
- ① This is the connector with the wires leading to the battery.
- ① [Tweezers](#) may help.

## Step 5

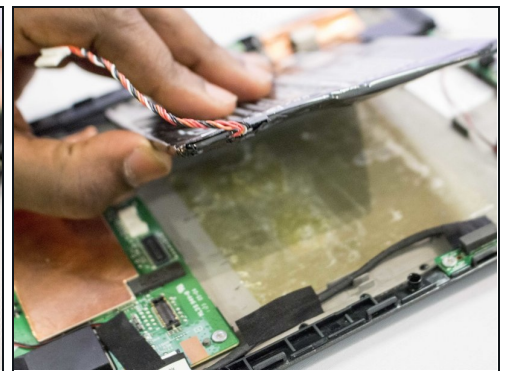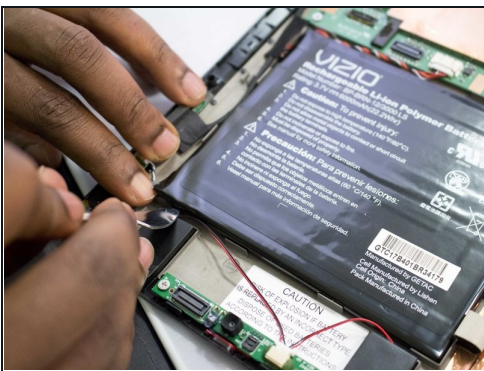

- Pull the battery away from the back panel.
- ① A metal spudger may be needed to pry the battery from the backing.
- ⚠ The battery is glued to the back panel and caution should be used as to not break or rupture the battery pack.

---

To reassemble your device, follow these instructions in reverse order.