




# Asus Transformer Book T100TAR Trackpad Replacement

If your trackpad is unresponsive or broken, this guide will teach you how to replace it.

Written By: Alyssa Ballesteros

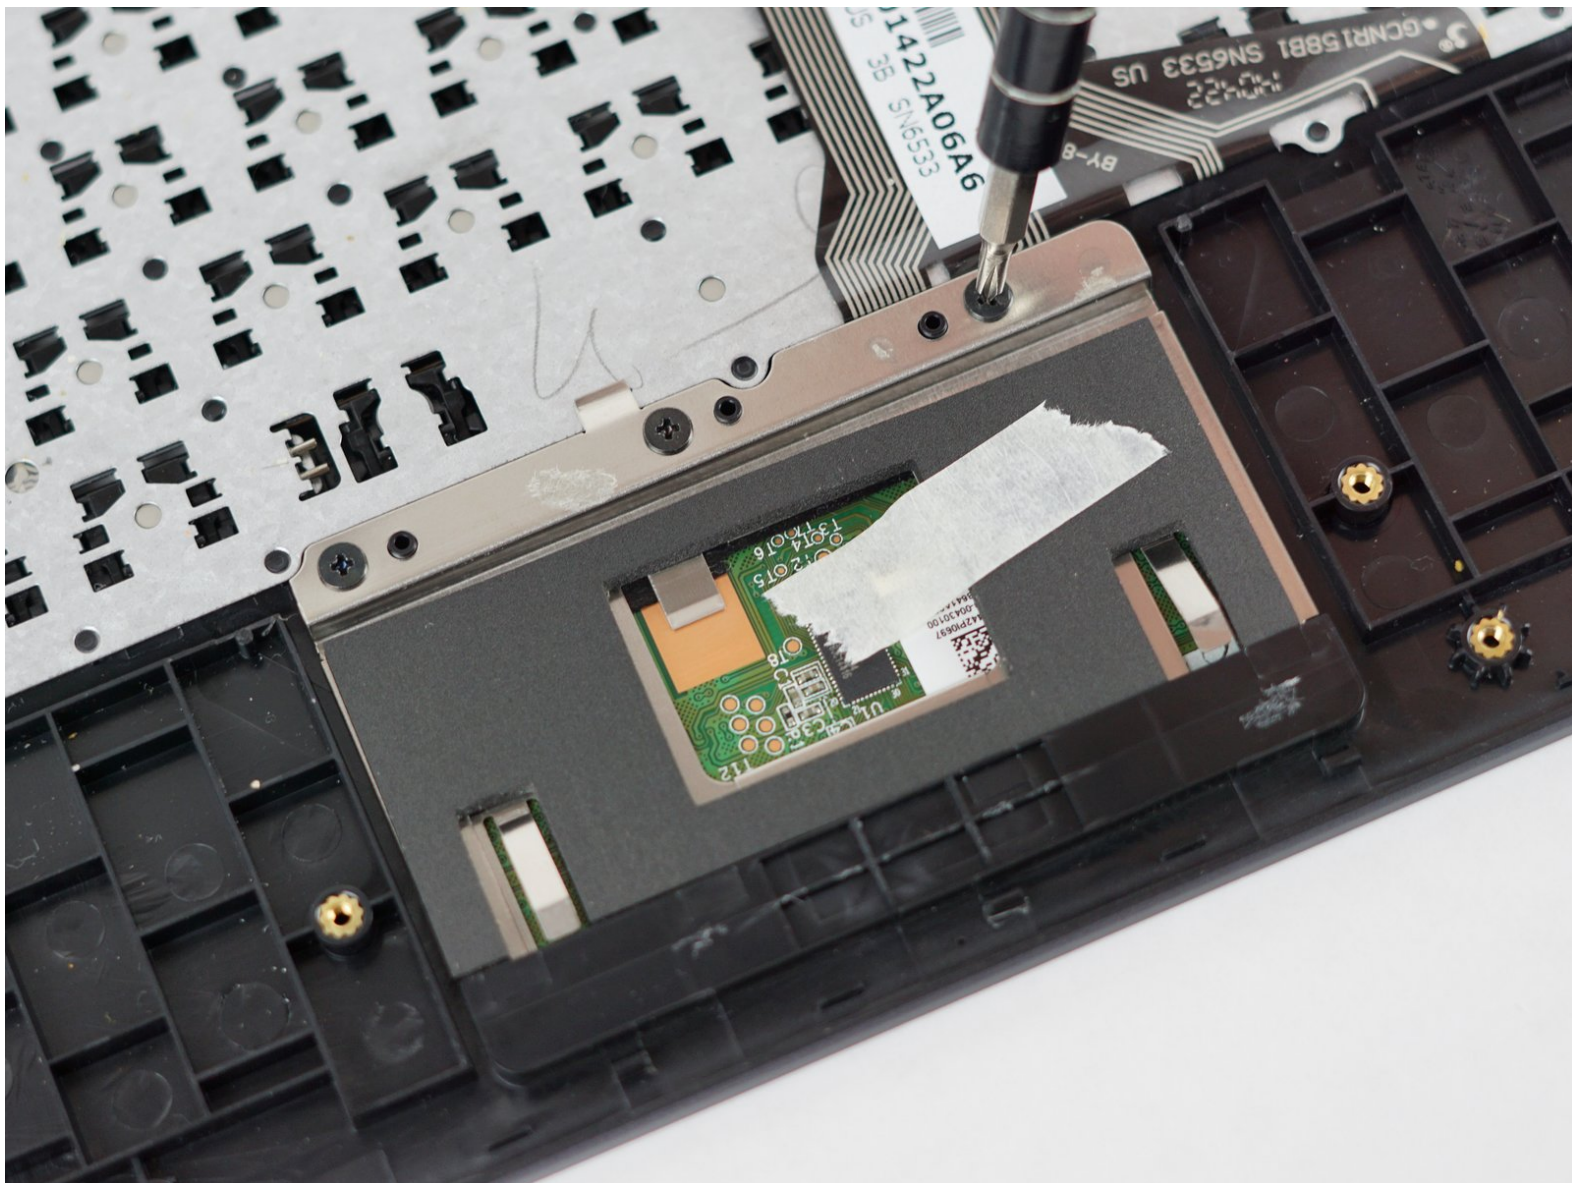

---

## INTRODUCTION


This guide will teach you how to disassemble the bottom part of your laptop and replace the trackpad contained in it.

---

### TOOLS:

- [Phillips #0 Screwdriver](#) (1)
  - [Tweezers](#) (1)
  - [Metal Spudger](#) (1)
-

## Step 1 — Trackpad

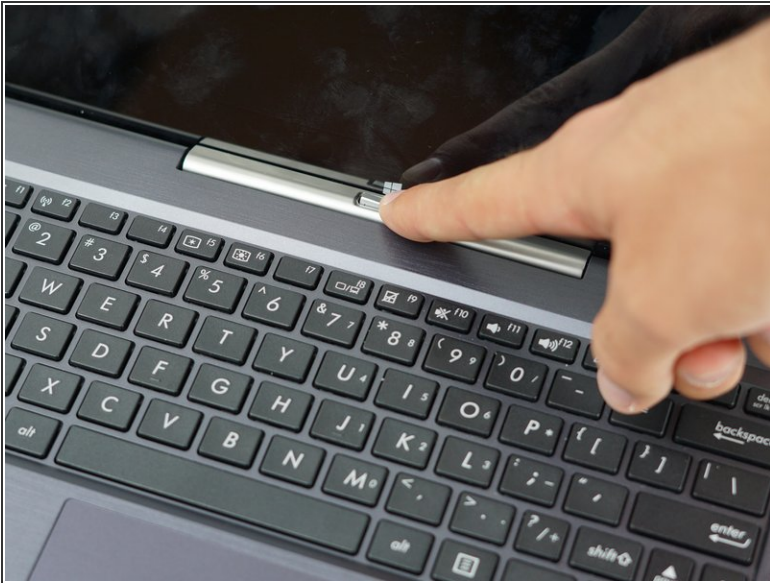

- Detach and separate the screen from the keyboard by pressing the silver release button at the base of the tablet.

## Step 2




- Using a Phillips #0 screwdriver, unscrew six 4mm screws from the rear cover of the keyboard.
- ⓘ The rest of the screws for this guide will be Phillips #0 head screws.
- Use the metal spudger to remove the rubber feet nearest to the top of the keyboard, where the connecting dock to the screen is. There are two 6mm screws under these rubber feet.

### Step 3




- Take the metal spudger and insert it into the seam of the rear cover casing and gently pry upwards.
- If done correctly, you should feel the clips release.

 Do not force the clips to release. This will cause them to break, and if broken, the screen will become loose. Open the rear cover gently and with caution.




## Step 4

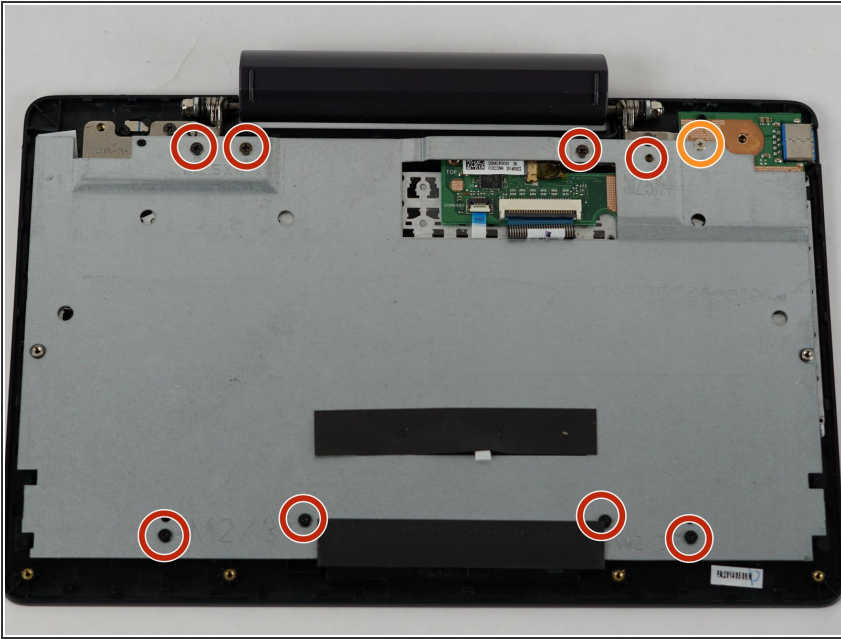


- Unscrew the screws on the base plate of the keyboard dock. There should be four 4mm screws along the bottom and four 6mm screws along the top, apart from a single 4mm screw (annotated in orange)

## Step 5

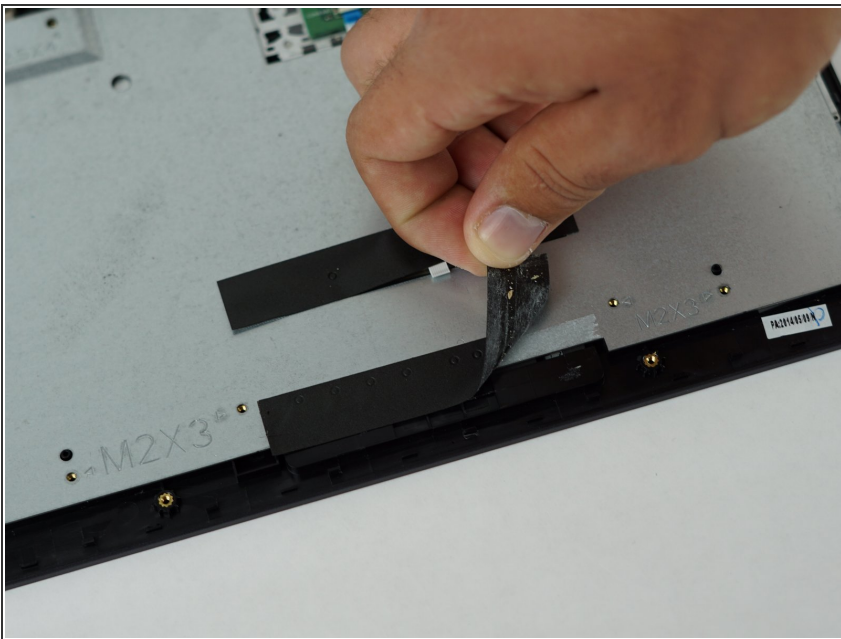

- Very carefully remove the black tape holding the metal plate in place.
- ⓘ This tape is very sticky, so you might want to use tweezers to get it loose before peeling it off.

## Step 6

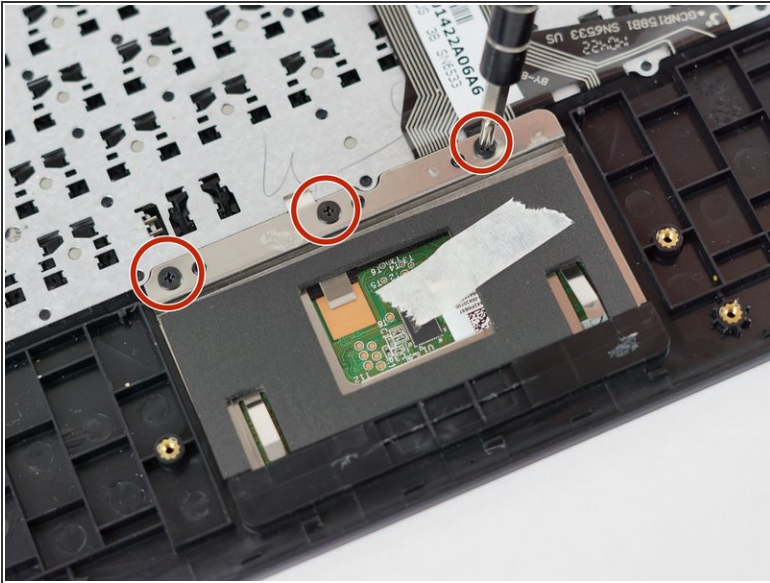

- Unscrew three 4mm screws holding the trackpad in place and remove the trackpad.

To reassemble your device, follow these instructions in reverse order.