




# Motorola XOOM 2 Media Edition Battery Replacement

Having troubles charging, holding a charge or...

Written By: Taylor

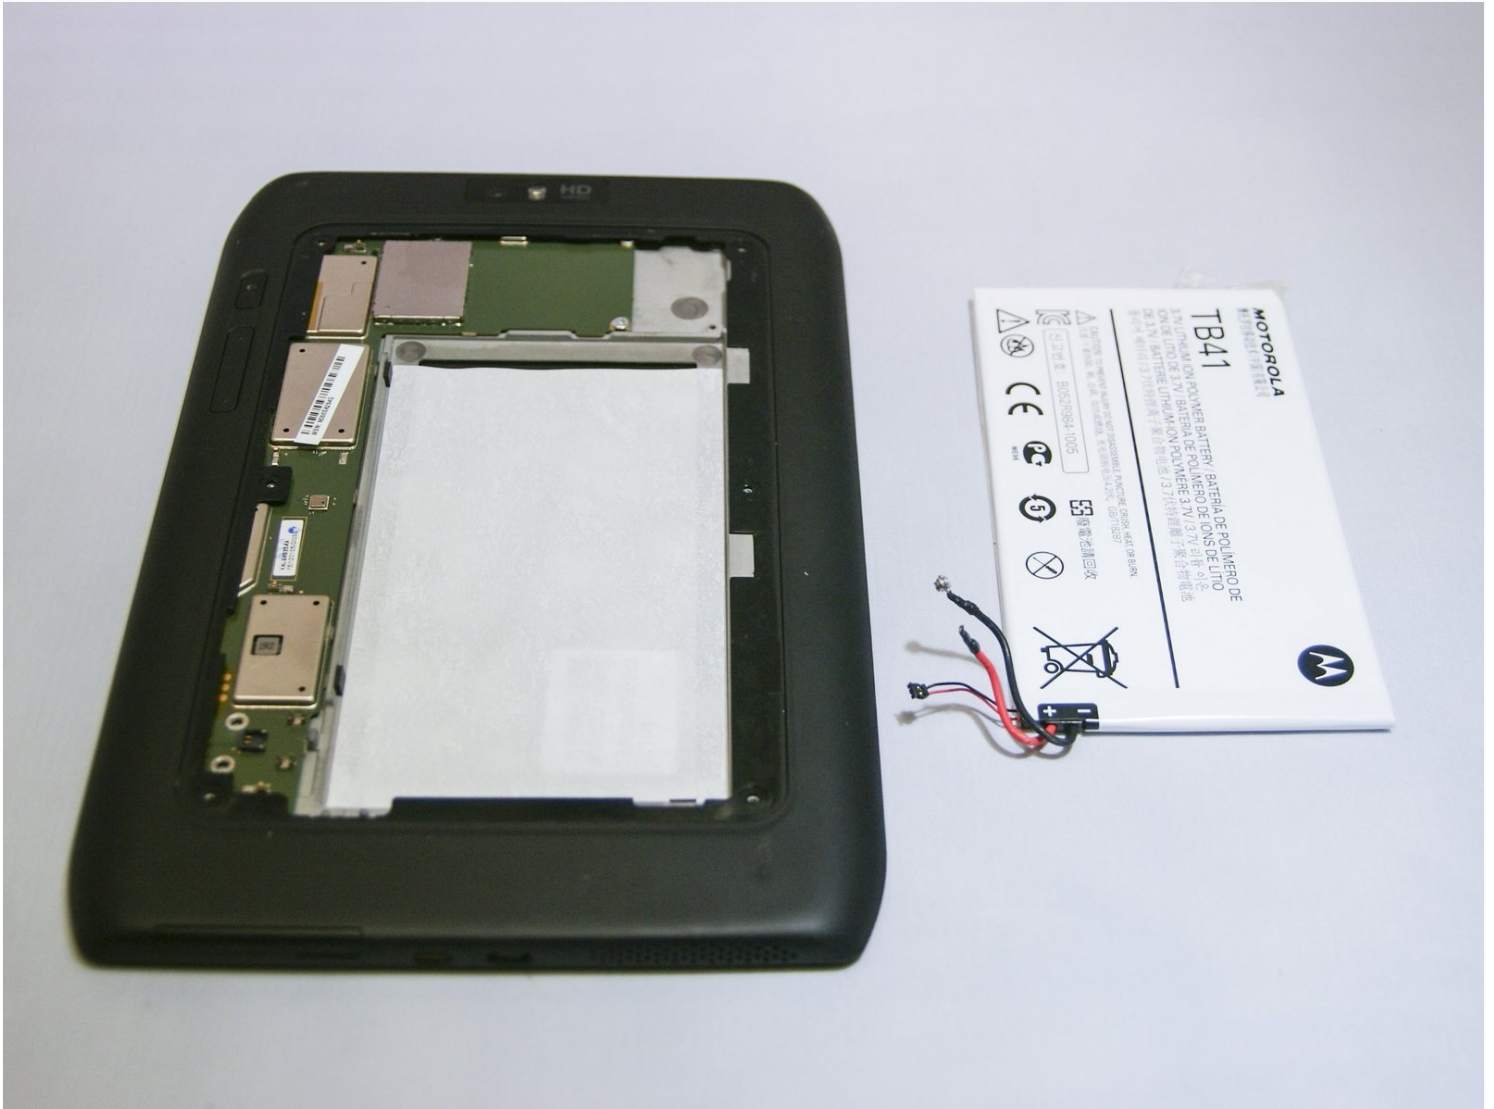

# INTRODUCTION

Having troubles charging, holding a charge or keeping your device powered on? This guide will help you replace your battery. You will need to purchase a new battery before beginning.


---

## TOOLS:

- [iFixit Opening Tool](#) (1)
  - [T3 Torx Screwdriver](#) (1)
  - [T5 Torx Screwdriver](#) (1)
  - [Tweezers](#) (1)
- 

## Step 1 — Battery



-  Power off your tablet before beginning disassembly.
- Remove six 2.74mm Torx #3 screws from the back panel of the device with a Torx T3 screwdriver.


## Step 2



⚠ There is adhesive attached to the underside of the back panel. Gradually lift panel to avoid bending it out of shape.

- Pry off the back panel with a plastic opening tool.

## Step 3

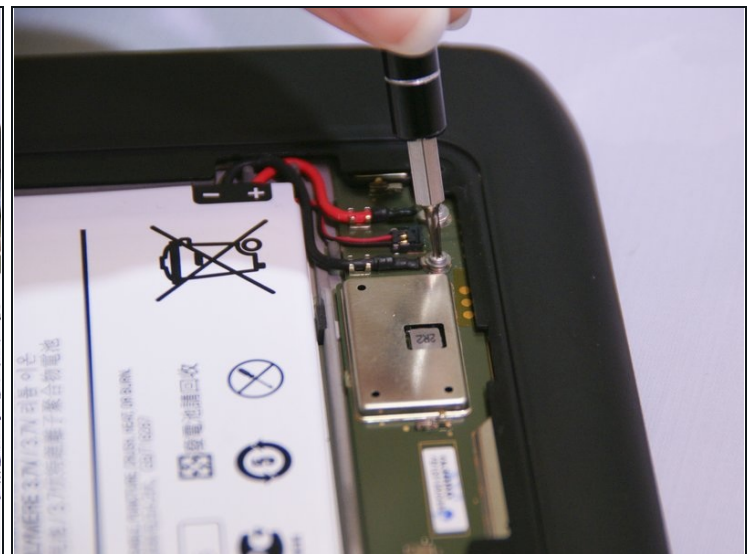


⚠ These screws are tight and prone to becoming stripped.

⚠ The battery cables are likely to snap when removing the screws.

- Remove two 2.38mm Torx #5 screws from battery cables with Torx T5 screwdriver.




## Step 4

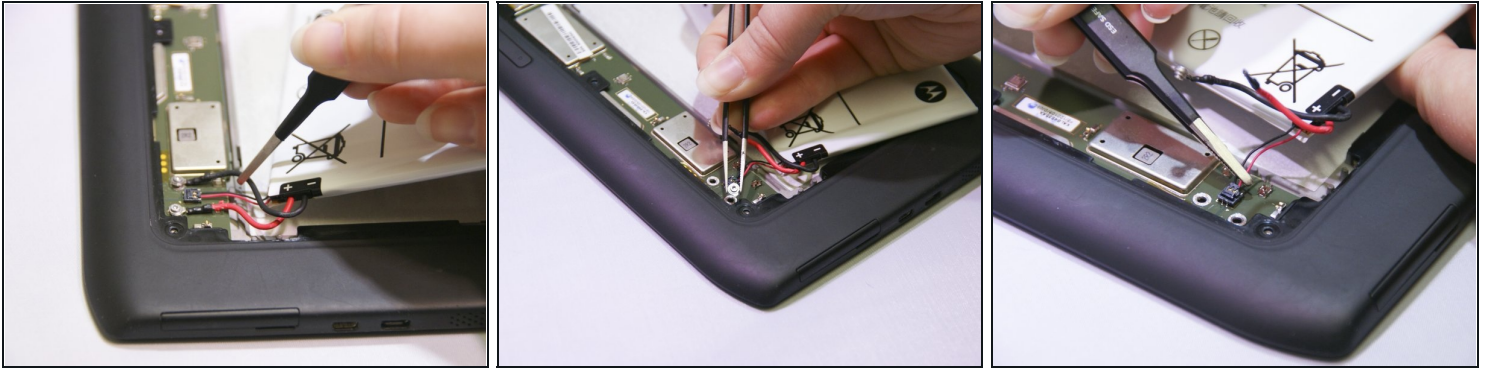

- Pull up the battery cables and battery chip with [tweezers](#).

## Step 5

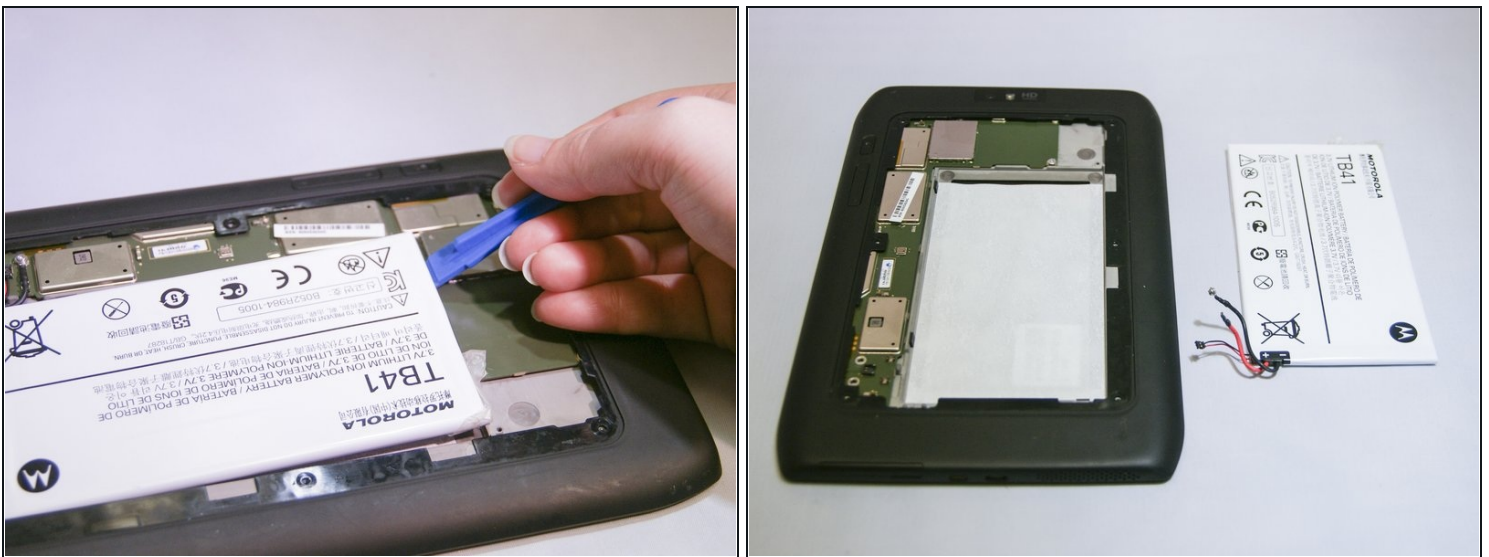

- Pry the battery out of the device with the plastic opening tool.
- ☑ Some force is needed to lift the battery up because of the adhesive attached to the backside of the battery.

---

To reassemble your device, follow these instructions in reverse order.