



Samsung Galaxy Tab E 9.6 Verizon Back Casing Replacement

This guide covers removing the back enclosure...

Written By: Dave Dorzback



INTRODUCTION

This guide covers removing the back enclosure on the Samsung Galaxy Tab E.




TOOLS:

[iFixit Opening Tool](#) (1)




[Suction Handle](#) (1)

Step 1 — Back Casing




-  Remove any micro-SD or SIM cards before continuing.
-  Verify your device is turned OFF.
-  Disconnect all external devices from your tablet.

Step 2

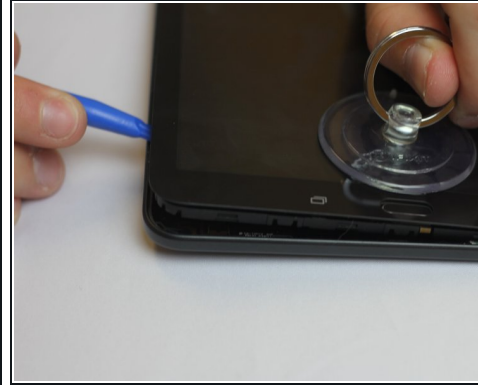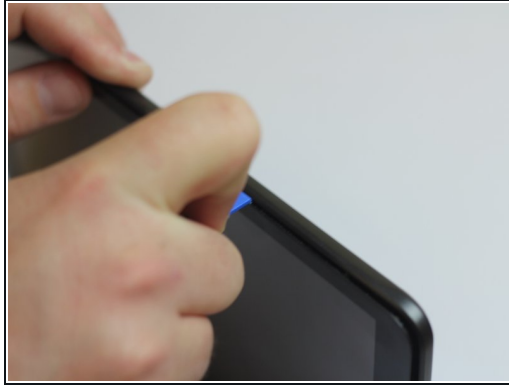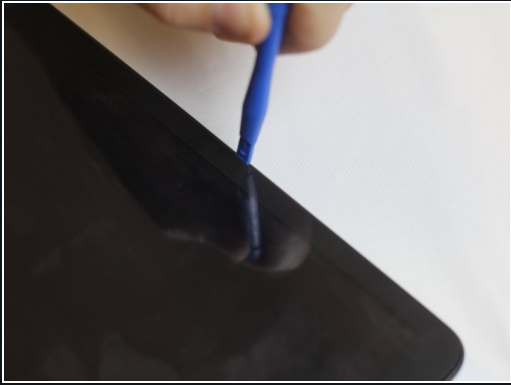

- Insert the plastic opening tool by wedging it between the device's screen and back cover.
 - Move the plastic tool around the edges of the device to undo the plastic lips holding the casing together.
- i** This step may require more force than expected. If difficult, try using a suction cup on the screen.

Step 3

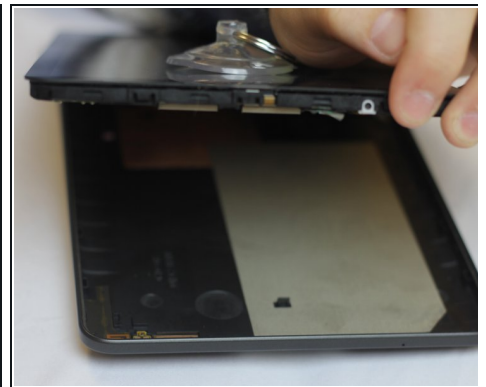

- This process will become easier as more clips are separated.
 - Use your hands to gently pull the back cover off the device after about half of the clips are separated.
- ★** A suction cup can be used in this step as well to assist in pulling the device apart.

To reassemble your device, follow these instructions in reverse order.

