



iPhone 4 Teardown

iPhone 4 teardown to logic board.

Written By: Taran Gill






TOOLS:

- [Essential Electronics Toolkit \(1\)](#)
-

Step 1 — iPhone 4 Teardown

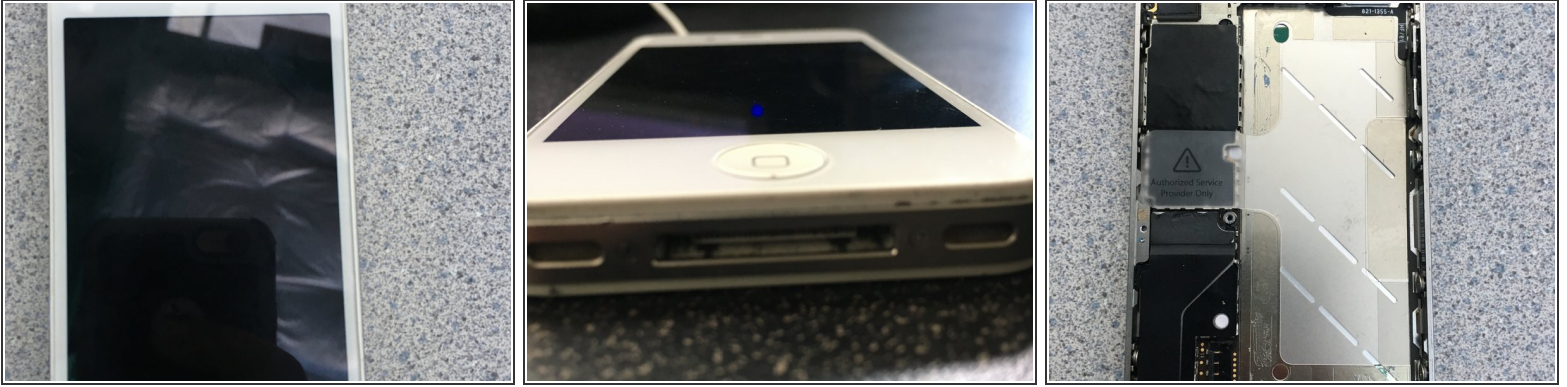

- Welcome to the iPhone 4 teardown to the logic board.
- 1. Take your phone and unscrew the bottom screws near the phone speakers which will take out the the back surface.
- 2. Carefully remove the Li-on battery and be careful not to damage the battery.

Step 2




- After you have done unscrewing if you have trouble removing the back use your thumbs to gently slide the back piece off.

Step 3



- Find the antenna and speaker enclosure and unscrew.
- Carefully remove the antenna and speaker enclosure and keep it in a safe area. Then look for the emi shield at the top of the phone and unscrew the screw.

Step 4 — Step 4

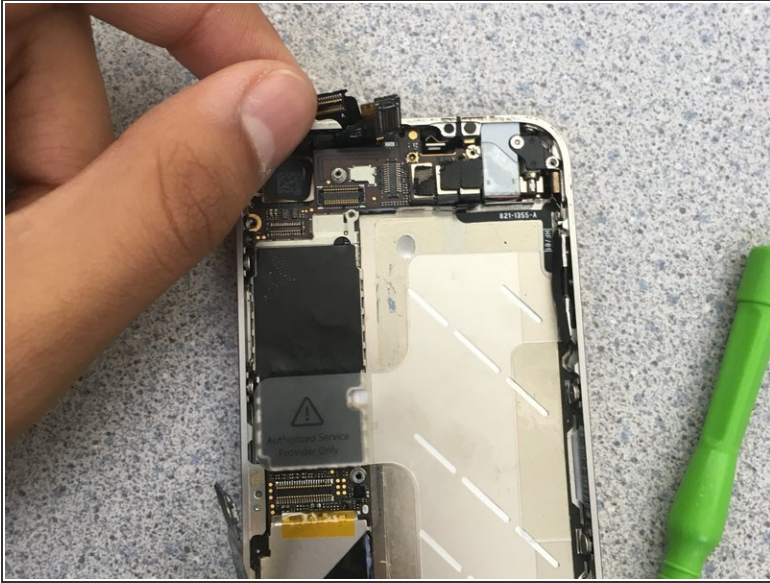

- 4. Use the plastic pry to lift up the five logic board connectors at the top of the phone.
- 5. For the final step of this teardown unscrew a screw near the camera, then use the pry to carefully remove the camera
- This has been a short teardown to help you with what you need.