




Jabra Freeway Speaker Replacement

In the guide you will be replacing one of the 3 speakers found in the Jabra Freeway.

Written By: Alec Wilson

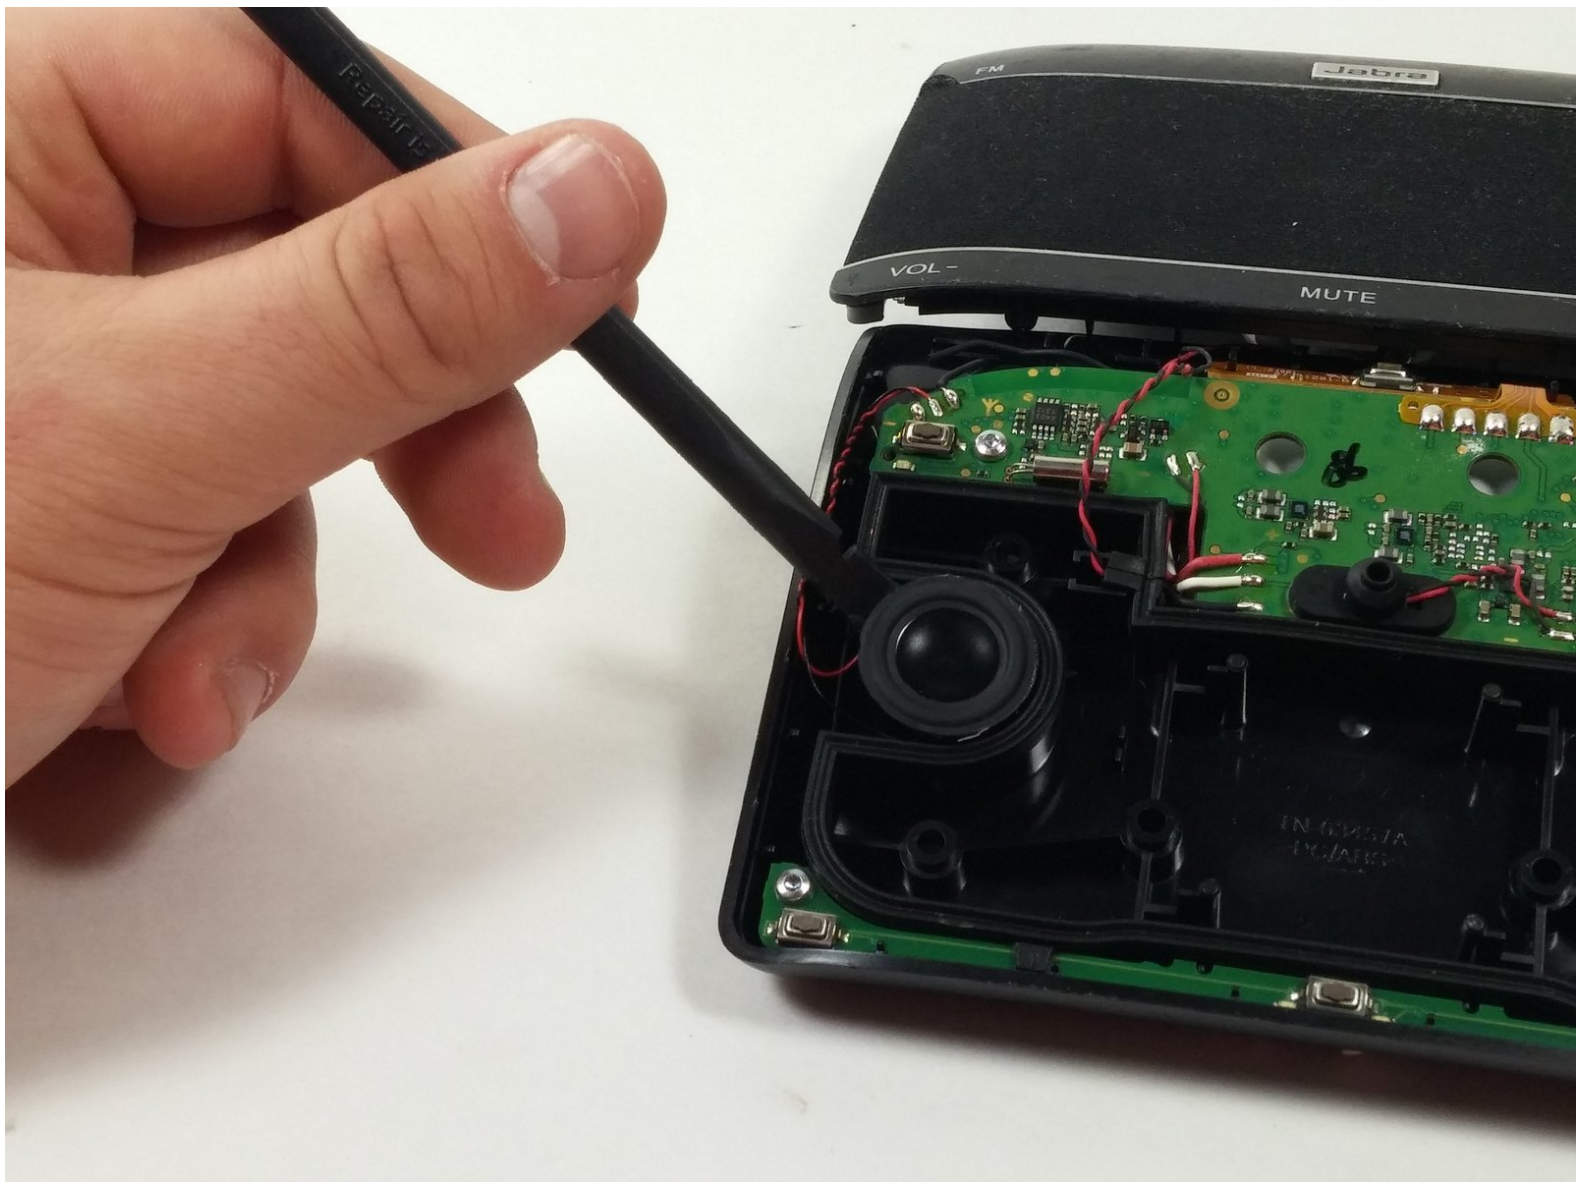

INTRODUCTION


This guide explains how to replace one of the 3 main speakers in the Freeway, however all 3 speakers are removed using this guide and the process is identical. Be sure the device is completely powered off before continuing.

TOOLS:

- [Spudger](#) (1)
 - [T9 Torx Screwdriver](#) (1)
 - [Soldering Iron](#) (1)
-


Step 1 — Front Panel




 Turn off the device before proceeding. Failure to do so may result in device damage or injury to oneself.

- Remove the rubber pads from the bottom of the device using the spudger.

Step 2

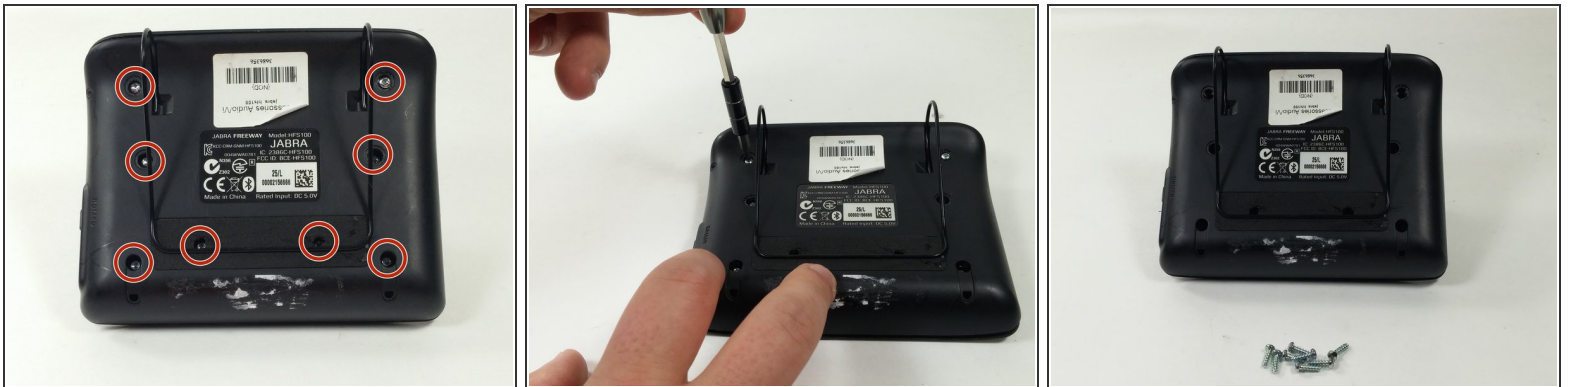


- Remove the eight 6mm T9 screws.
-  Two of these screws are underneath the foam padding. This padding is glued on and will be destroyed in this process. Poking through the foam minimizes the damage to the device.

Step 3




- Gently lift the front panel off of the device and carefully rest it to the side.

Step 4 — Speaker

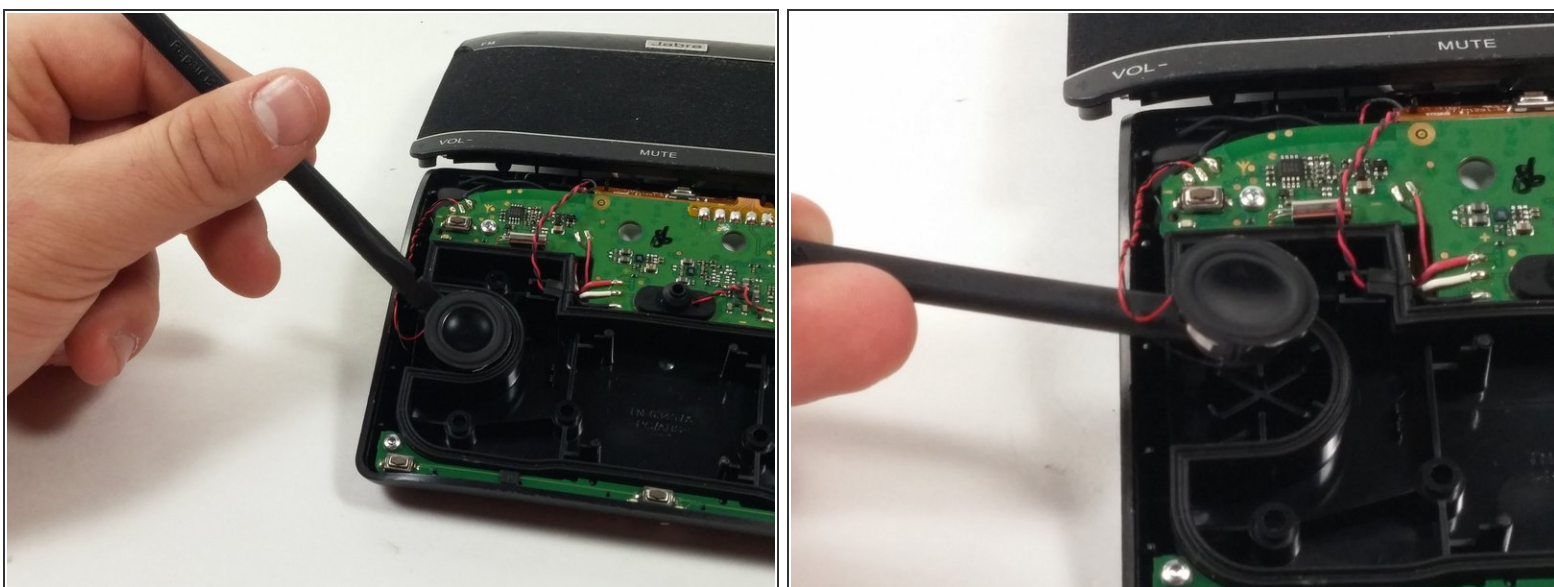

- Gently lift the speaker out of the device using the spudger.
- ⓘ The speaker is not fixed in place, and therefore very little force is necessary to remove this component.

Step 5

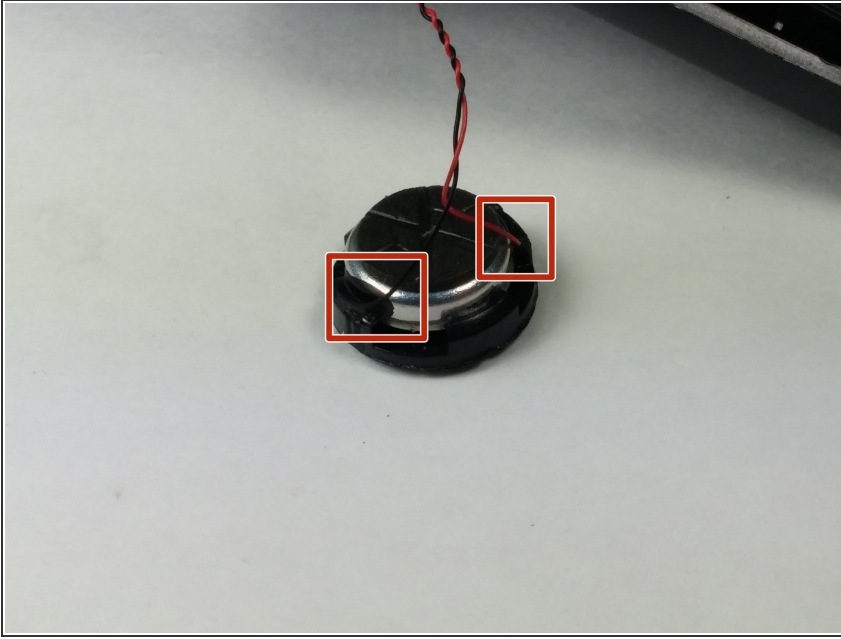

- Desolder the two wires connecting to the speaker.

To reassemble your device, follow these instructions in reverse order.