




# Uniden Guardian G955 Touchscreen Replacement

Will successfully teach user how to replace touchscreen.

Written By: Pauline Lara

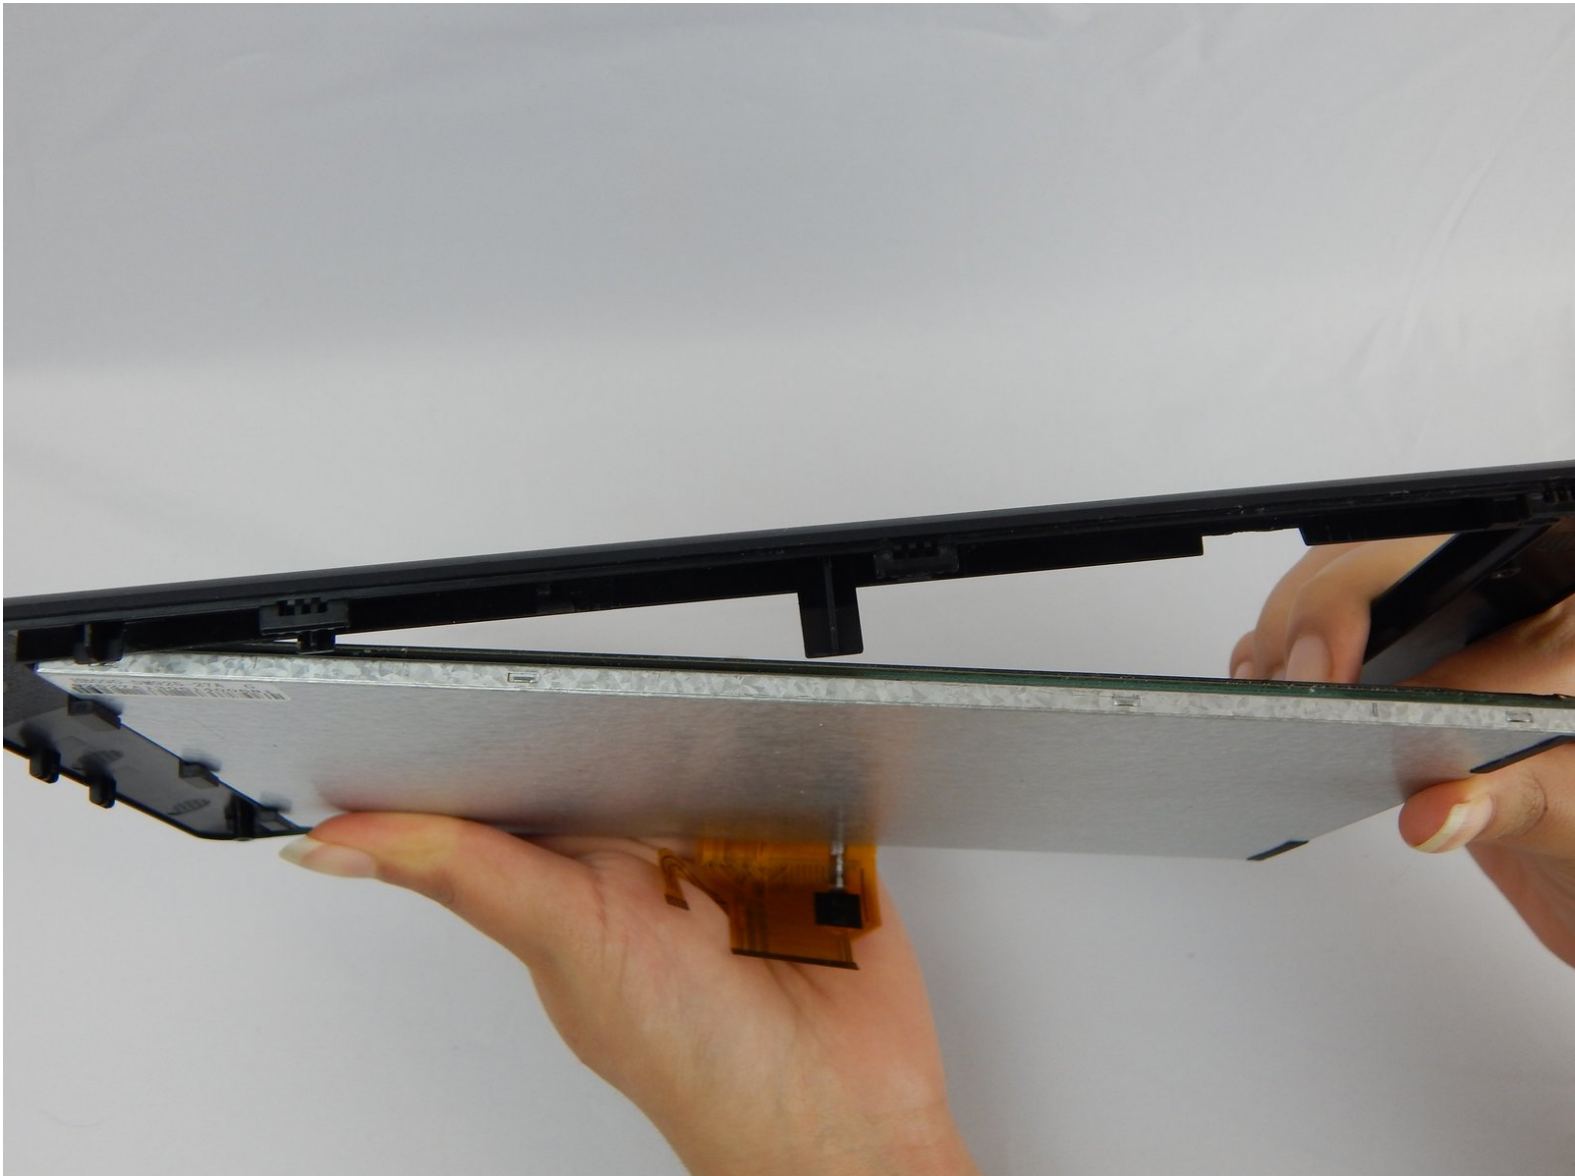

---

## INTRODUCTION

Separate the case in order to remove casing holding the touchscreen in place. Replace the touchscreen.

---



### TOOLS:

- [J1 Screwdriver Bit](#) (1)
  - [Metal Spudger](#) (1)
-

## Step 1 — Touchscreen





- Use a J1 Phillips screwdriver to remove the four 6.1 mm screws at the back of the monitor.

## Step 2




- Use metal spudger or an opening tool to pry open the device.

### Step 3

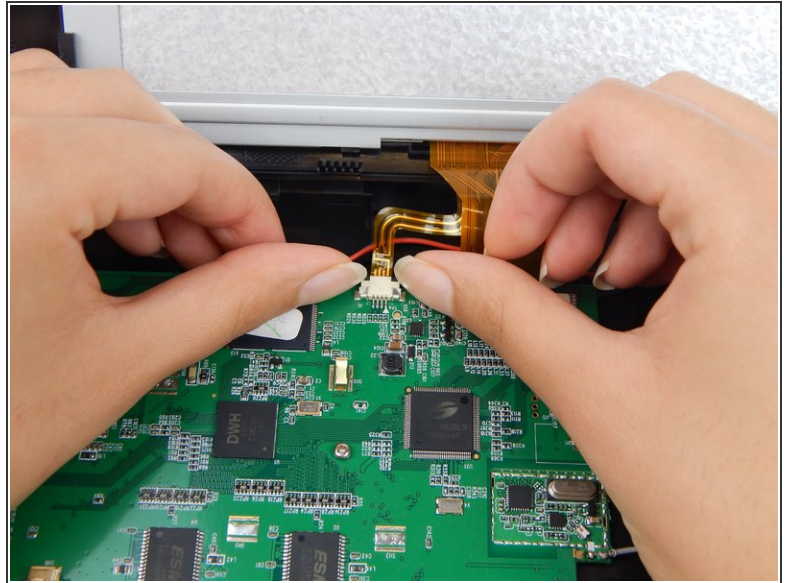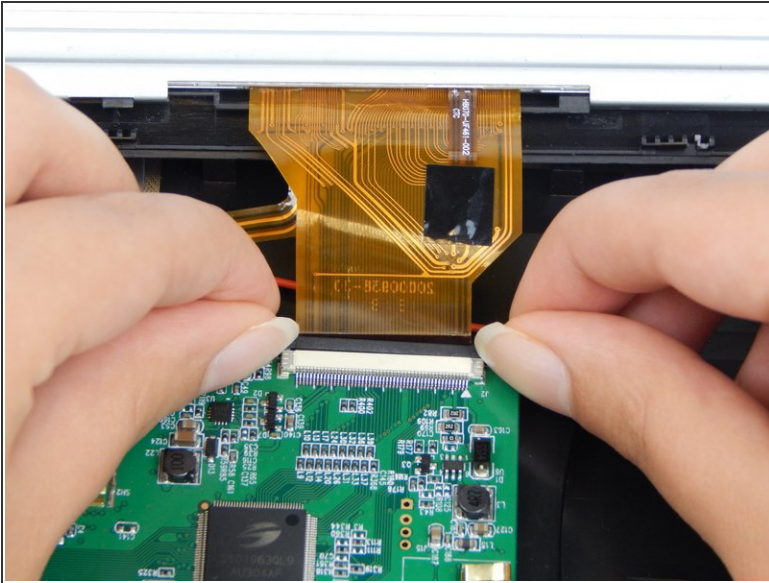

- In both pictures, disconnect the zero insertion force (ZIF) connector from the motherboard using your fingernail by sliding up on the male end of the connector to loosen it.



### Step 4

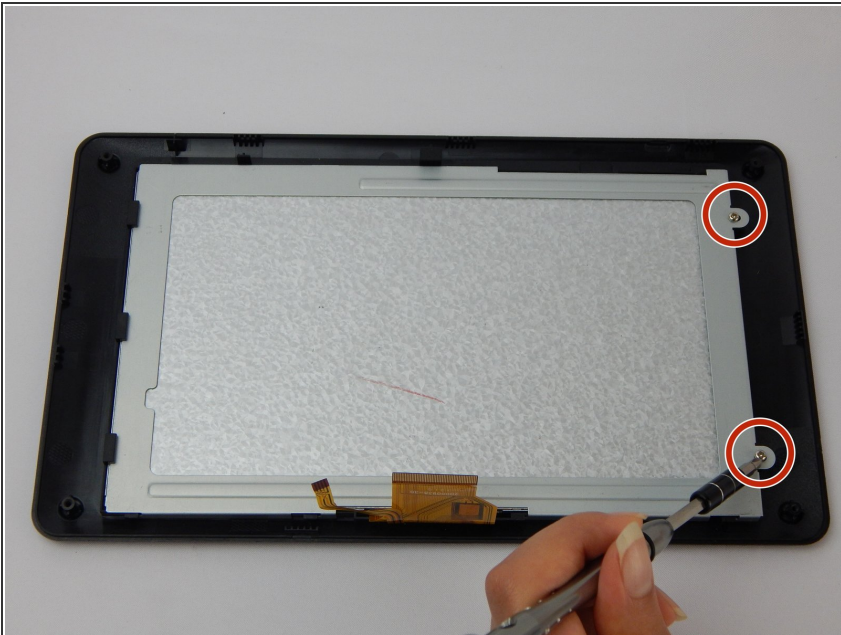

- Use a J1 Phillips screwdriver to remove the two 6.1 mm screws.



## Step 5

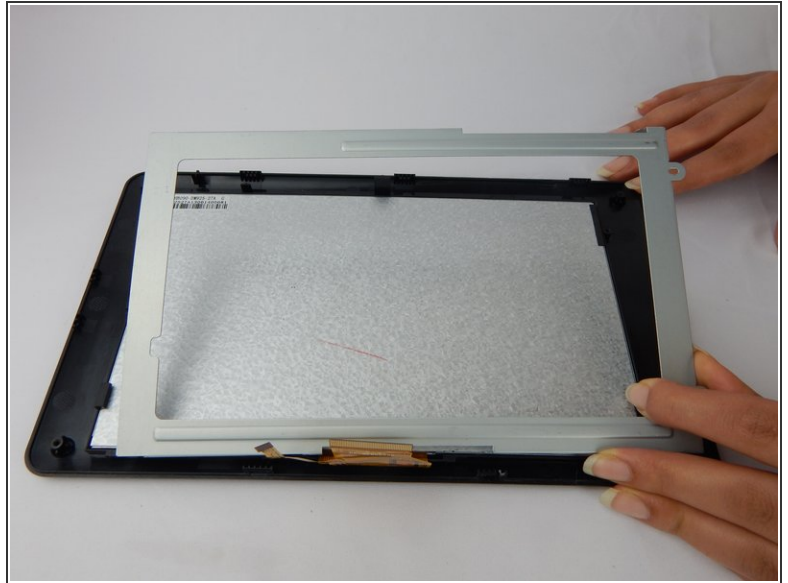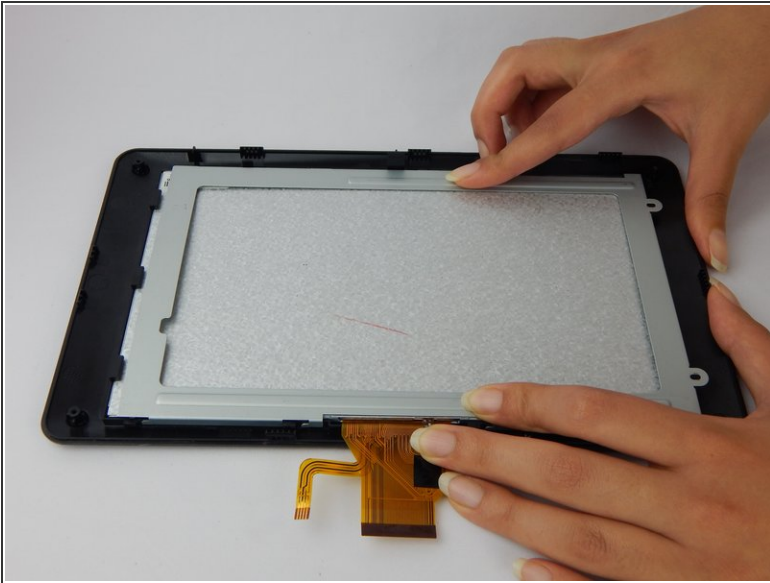

- Apply pressure to metal casing and slide off.

## Step 6



- Push touchscreen through black case.

To reassemble your device, follow these instructions in reverse order.