




# Hott T725-8G Camera Replacement

This guide will walk you through replacing the camera on the Hott T725-8G. You will need this [<https://www.ifixit.com/Guide/Hott+T725-8G+Back+Panel+Replacement/74840>] Prerequisite Guide] before you begin.

Written By: Emma Carroll

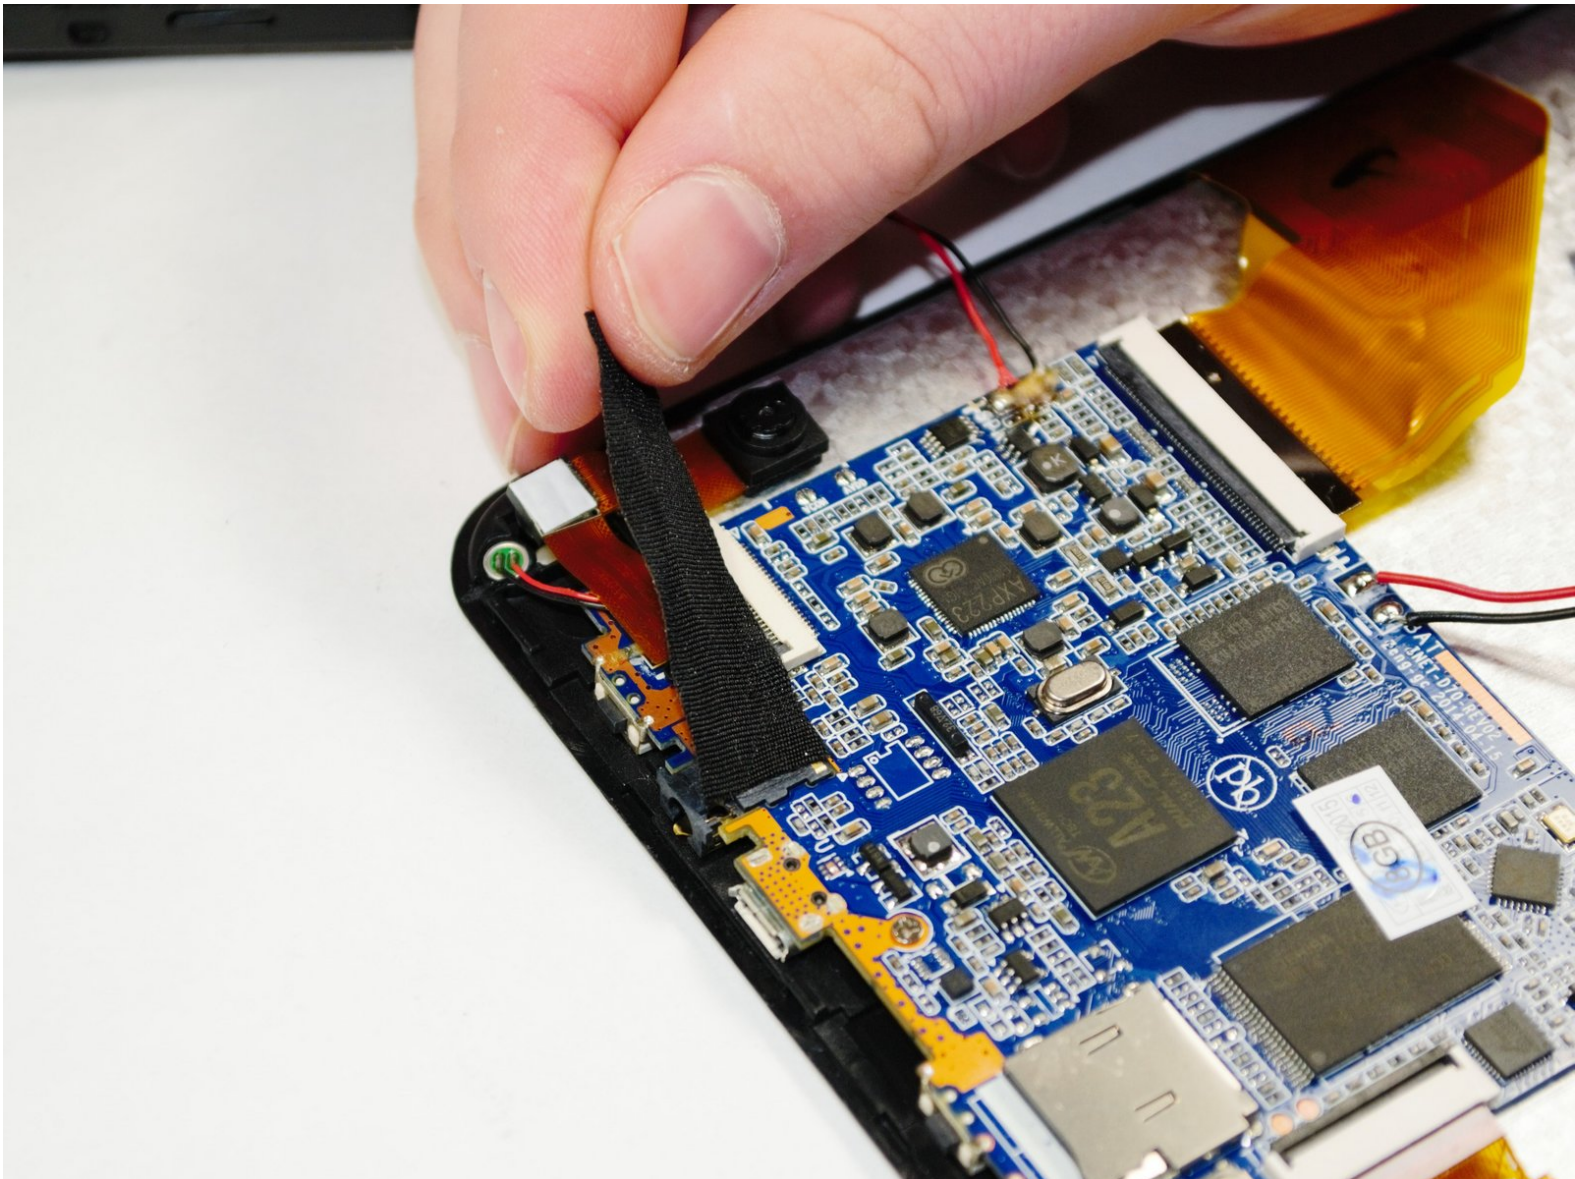

# INTRODUCTION

Follow this guide to replace the camera in the Hott T725-8G.



## TOOLS:


- [iFixit Opening Tools](#) (1)
- [Precision Tweezers Set](#) (1)
- [Heavy-Duty Spudger](#) (1)
- [Spudger](#) (1)



## PARTS:


- [Replacement Android Camera](#) (1)

## Step 1 — Camera

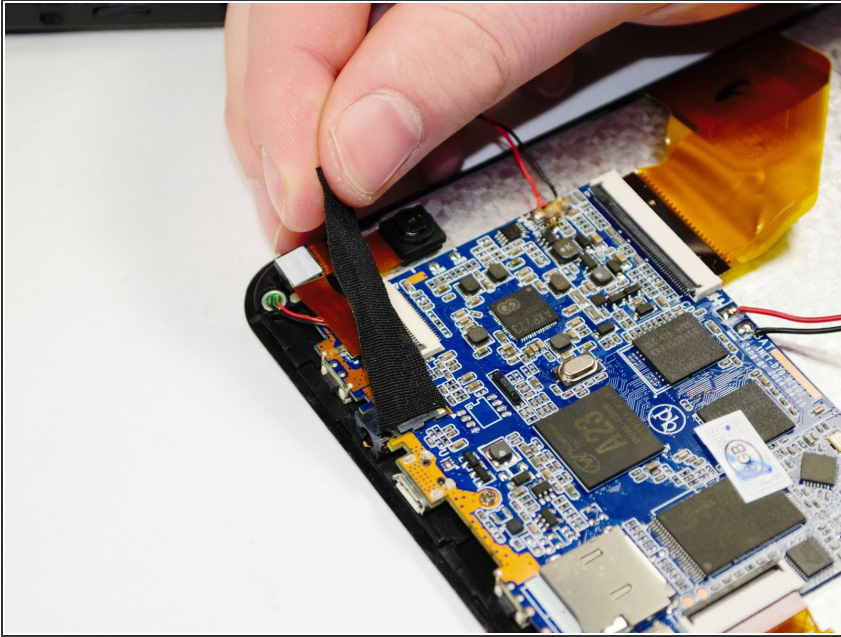

- Carefully remove the black electrical tape connecting the motherboard to the ribbon wire.


## Step 2

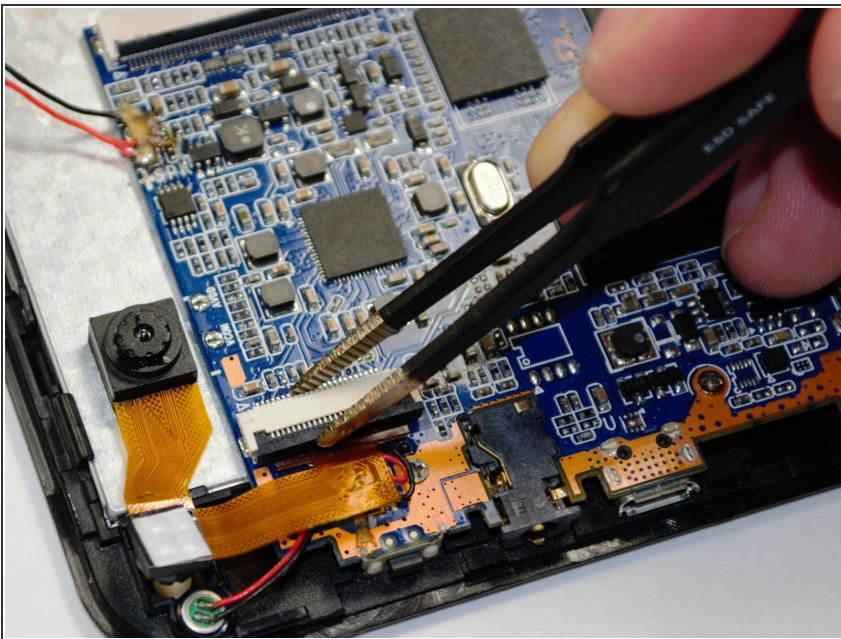

- Use a pair of Precision Tweezers to squeeze the clip of the ribbon wire to release it.




### Step 3

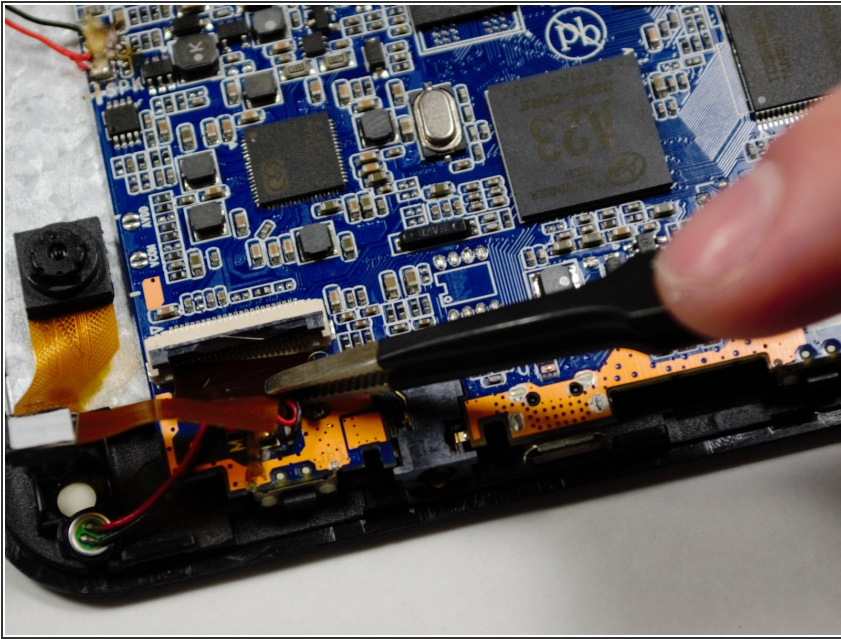

- Using a pair of the Precision Tweezers, remove the ribbon wire from the clip.

### Step 4

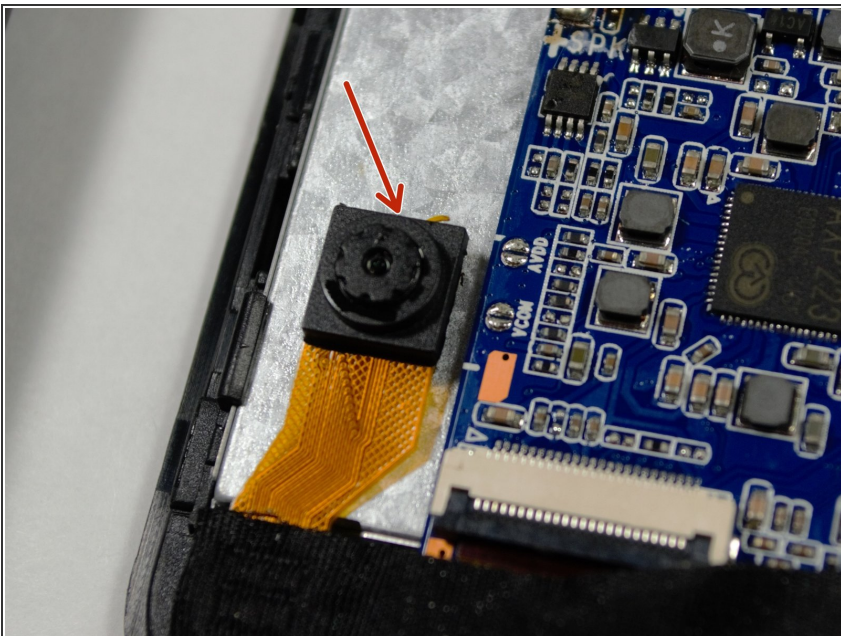

- Gently dislodge the camera using the Metal Spudger. The camera is now ready to be replaced.

To reassemble your device, follow these instructions in reverse order.