



# Acer Aspire 5334-2581 Screen Replacement

This guide will provide you with an overview of how to replace the screen on you Acer Aspire 5334-2581.

Written By: gilson teixeira



---

## INTRODUCTION


This repair guide will provide you with a step-by-step process on how to replace the LCD on your Acer aspire 5334-2581 device.



### TOOLS:

- [Metal Spudger](#) (1)
-

## Step 1 — Battery

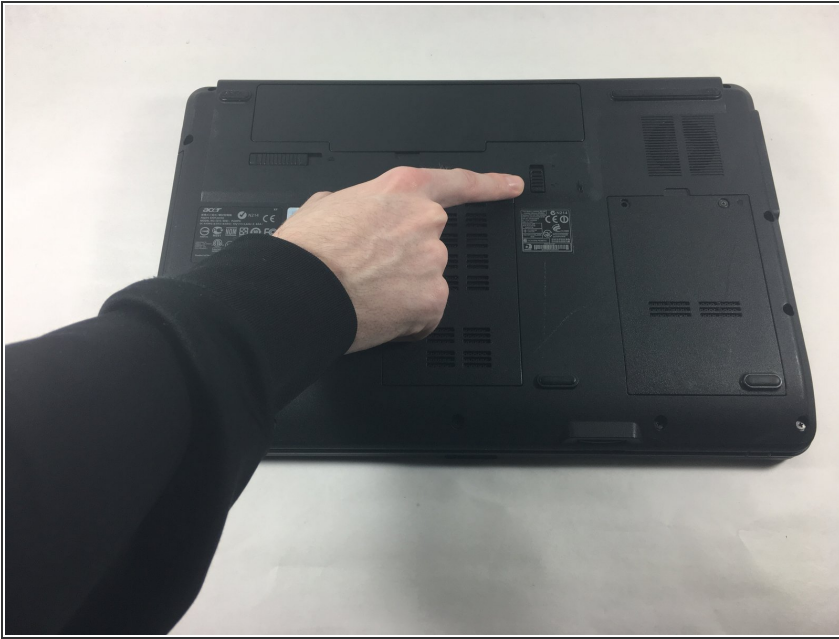


- Please make sure your device is unplugged . Turn it over slowly, and place it on a flat surface.

## Step 2




- This latch holds your battery in place, it should always be locked. Make sure to unlock this piece.
- ⚠ Do not break this latch, otherwise your battery will not hold in place.

## Step 3

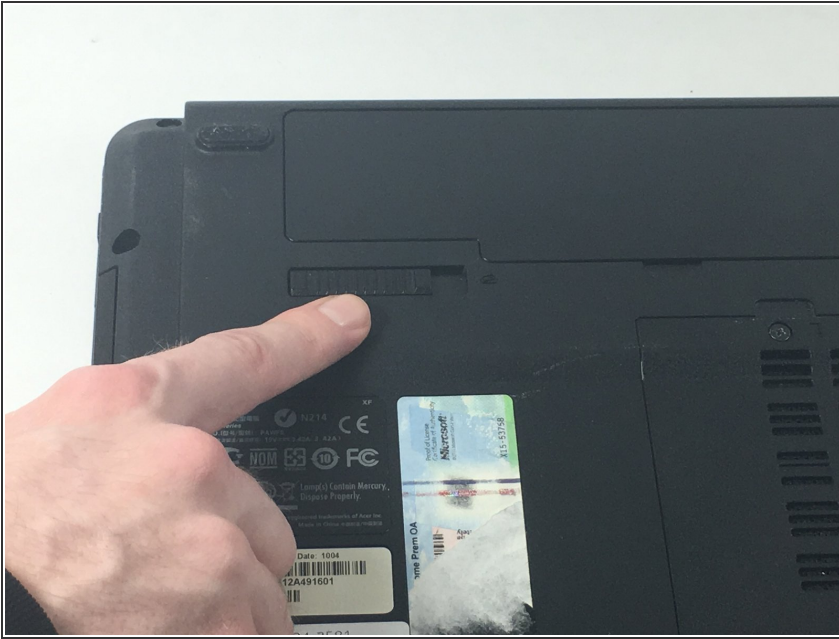

- Locate the eject latch and push it so the battery can come out.
- The battery will lift up once you have pushed the latch.
- ☑ You DO NOT need to adjust the latch when replacing the new battery, because it just snaps in place.

## Step 4

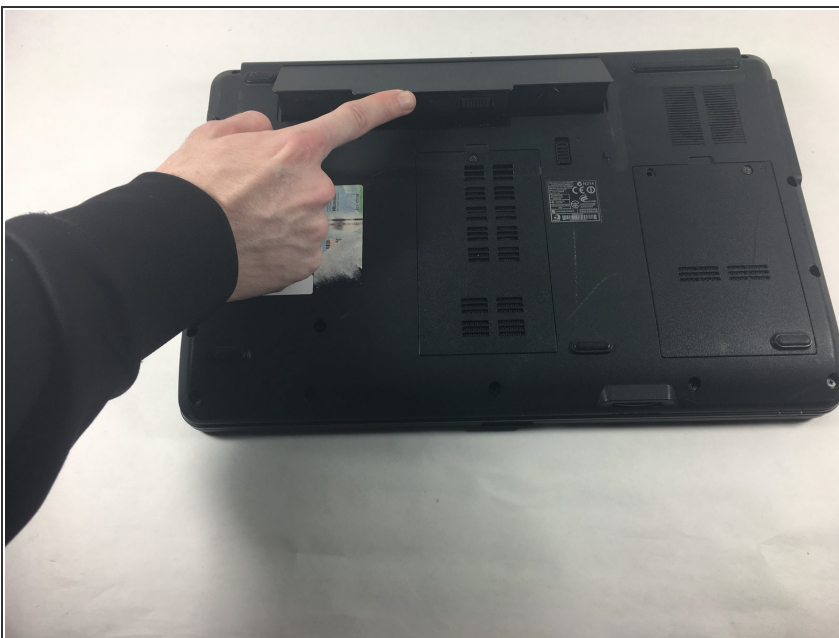


- Lift the battery up, and it should just come right off. You should see the label with the part number.

## Step 5 — Screen



- Remove the 4 rubber supports from the screen. Then remove the screws underneath.

## Step 6

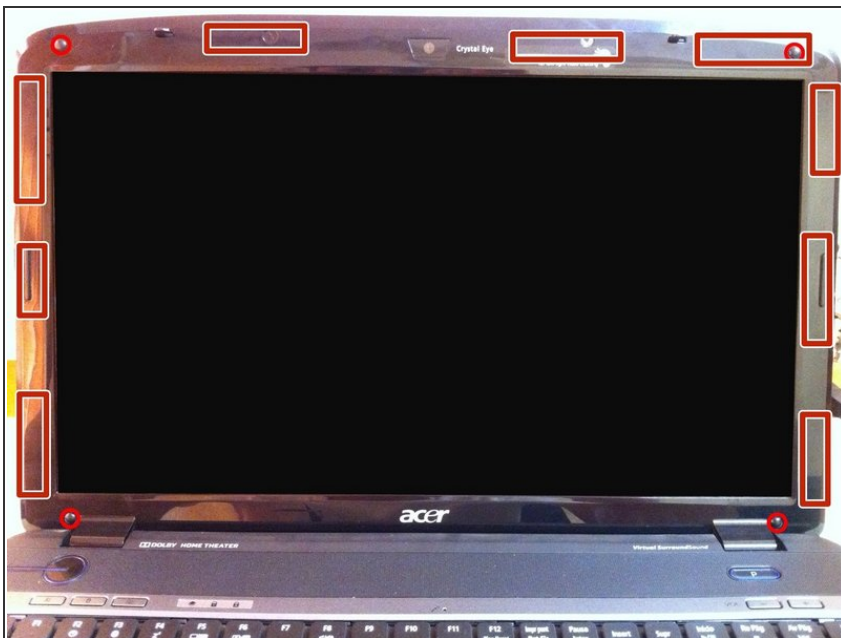

- With a spudger, release the clips that hold the plastic frame to the back cover.
- ⓘ Be careful while handling the bottom, there are cable connections, and you don't want to damage them





## Step 7




- With caution disconnect the camera cable.

## Step 8

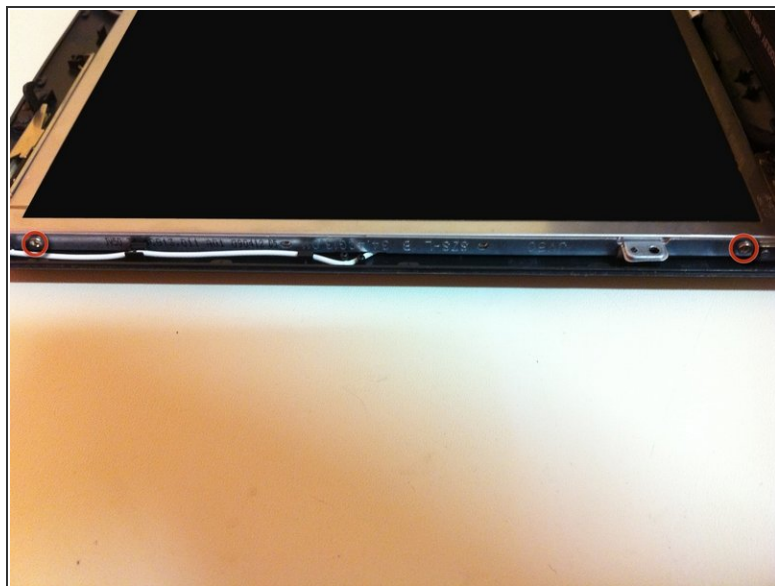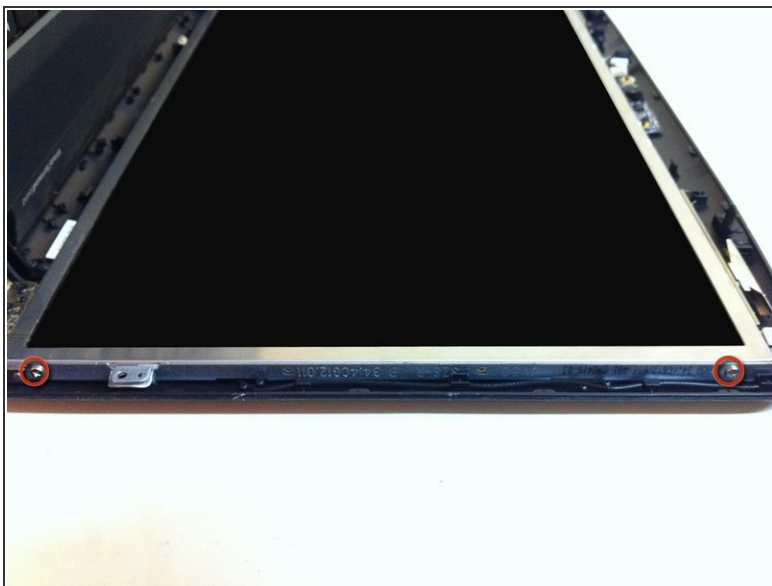



- Remove the 4 screws in the side of the LCD. Screen should be able to come off the frame

## Step 9

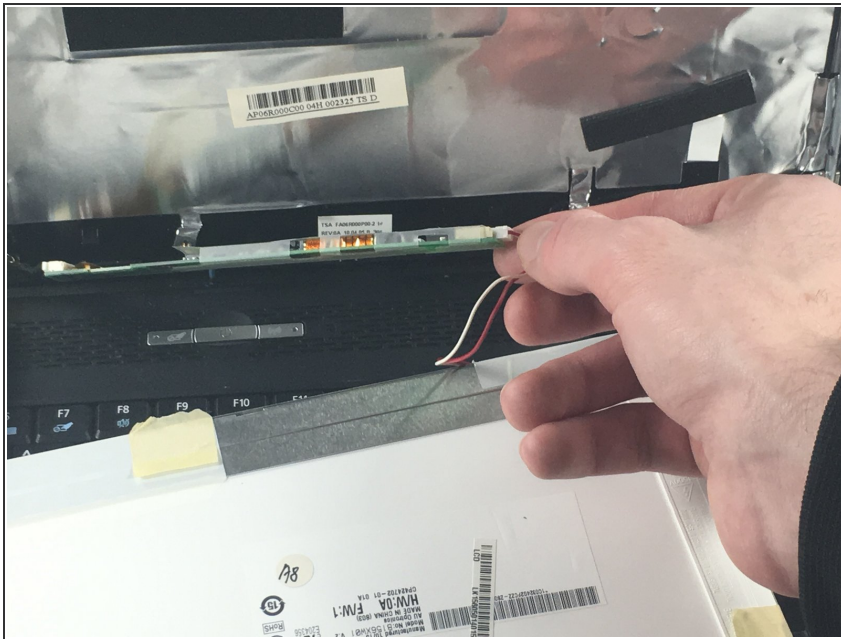

- Take the screen and flip on top of the keyboard.
  - Unplug the cable connected to the video card.
- ⚠ Don't use too much force, you don't want to damage this component.

## Step 10

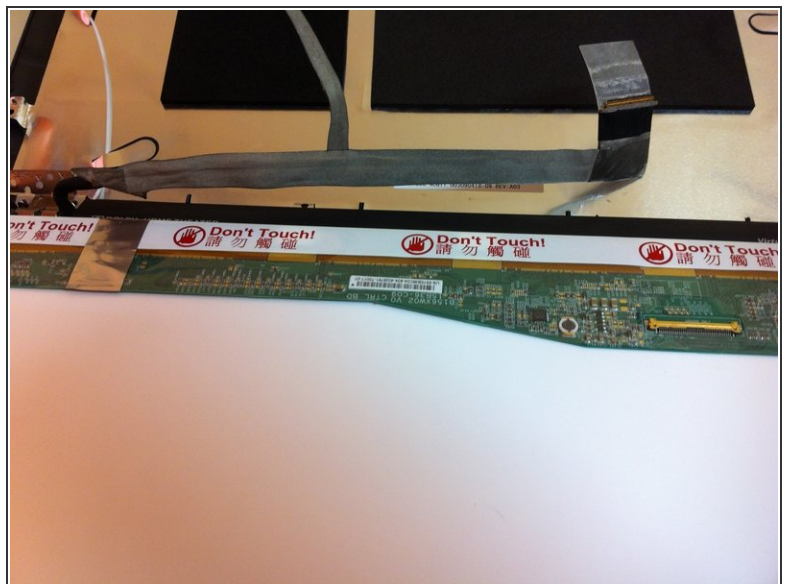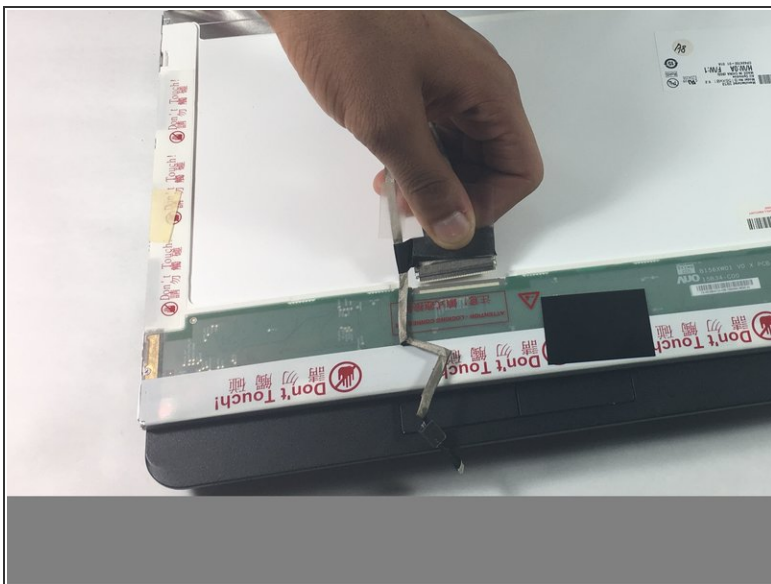

- Remove the tape, and unplug the display cable.
  - Unstick the cable from the back of the LCD, and now the LCD is free to come off. You are ready to install a new one
- ⚠ Try not to damage this cable, otherwise replacing it would be so much pain.

This document was generated on 2020-11-19 12:33:04 PM (MST).

To reassemble your device, follow these instructions in reverse order.