




Asus EeeBook X205TA Motherboard Replacement

This guide will help you replace the motherboard of your Asus EeeBook X205TA.

Written By: Shahir Makary

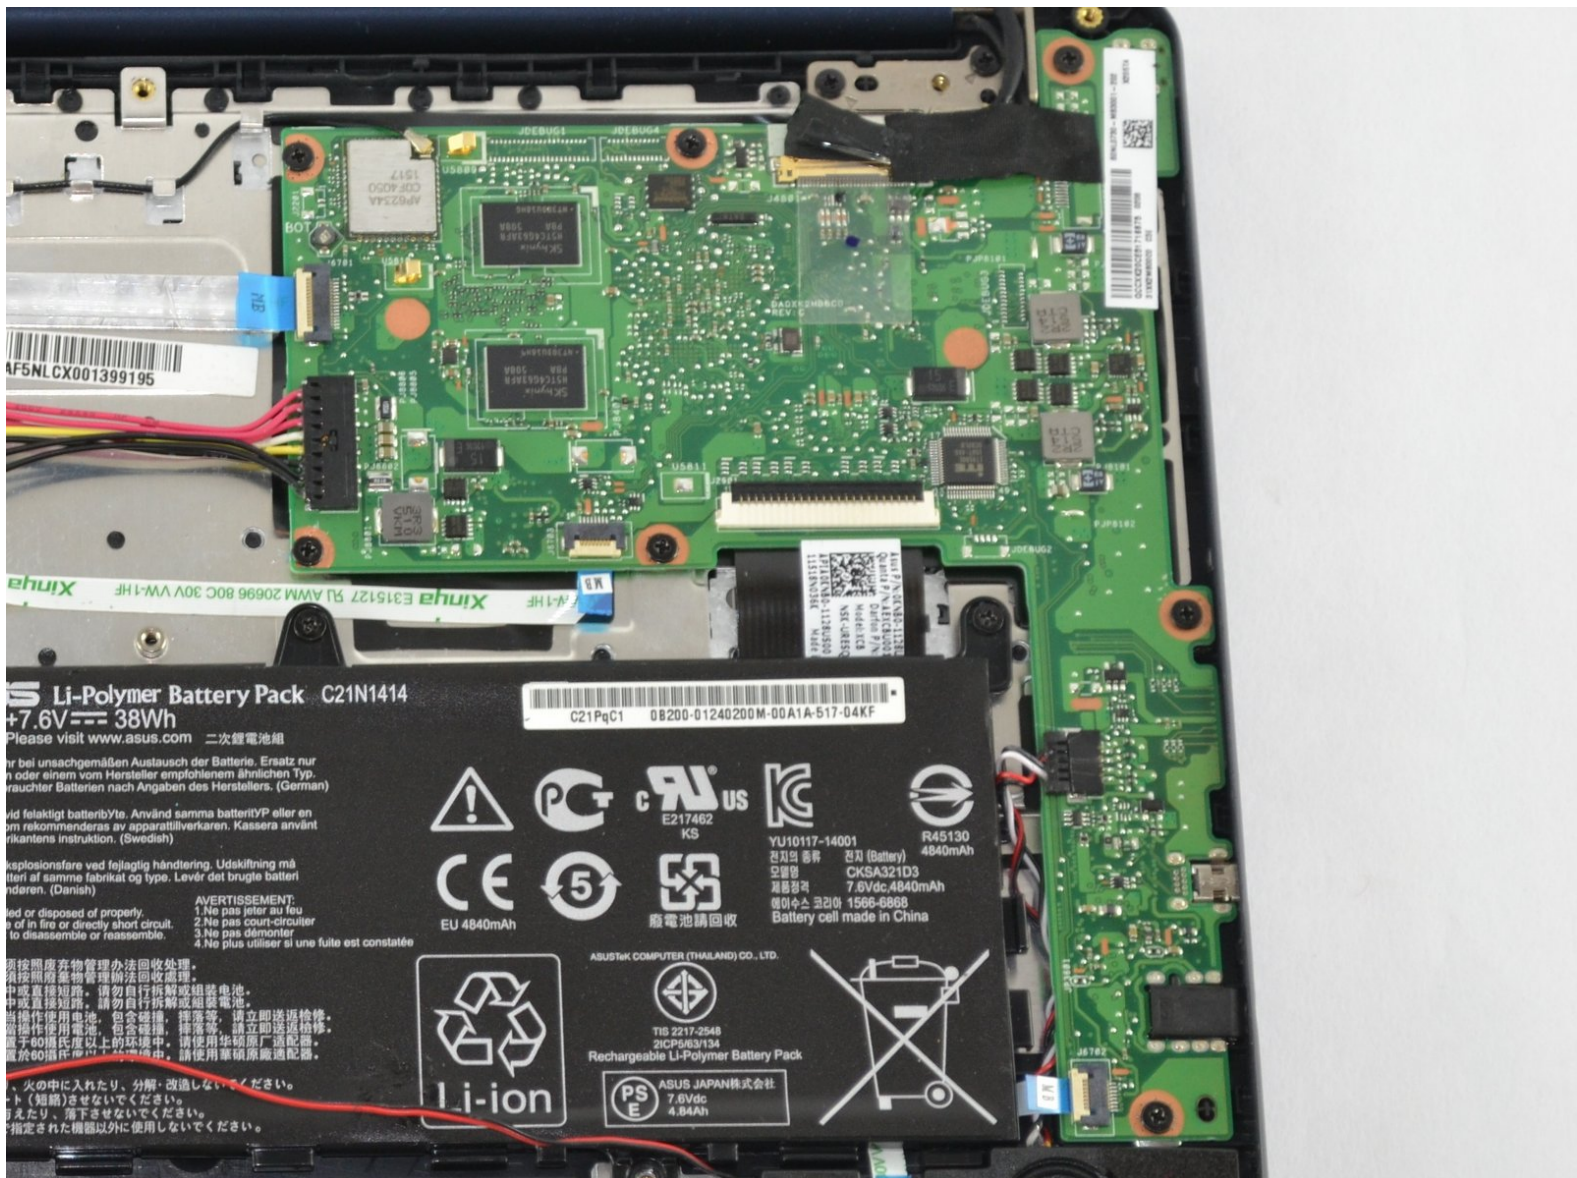

INTRODUCTION


This guide will help you replace your Asus EeeBook X205TA motherboard in case it is damaged, you want a faster RAM, better data transfers or better graphics. If disposing motherboard , please follow the laws and regulations for proper disposal.



TOOLS:

- [iFixit Opening Tools](#) (1)
 - [iFixit Precision Bit Driver](#) (1)
 - [Phillips #2 Screwdriver](#) (1)
-

Step 1 — Motherboard

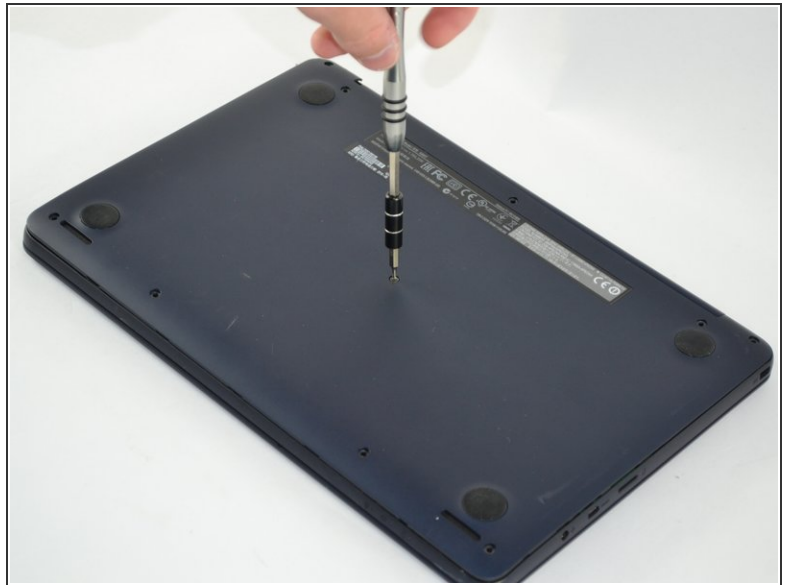

- Unscrew all 10 2mm screws located on the bottom of the laptop using a Phillips #2 screwdriver.

Step 2





- Insert the plastic opening tool in the crevice between the back of the laptop and the rest of the case.
- Carefully pry open the case from several points.
- ⓘ Slowly remove the back of the laptop, revealing the parts inside.

Step 3



- Unscrew all seven screws around the outer edge of the motherboard using 2mm Phillips Screwdriver.

Step 4

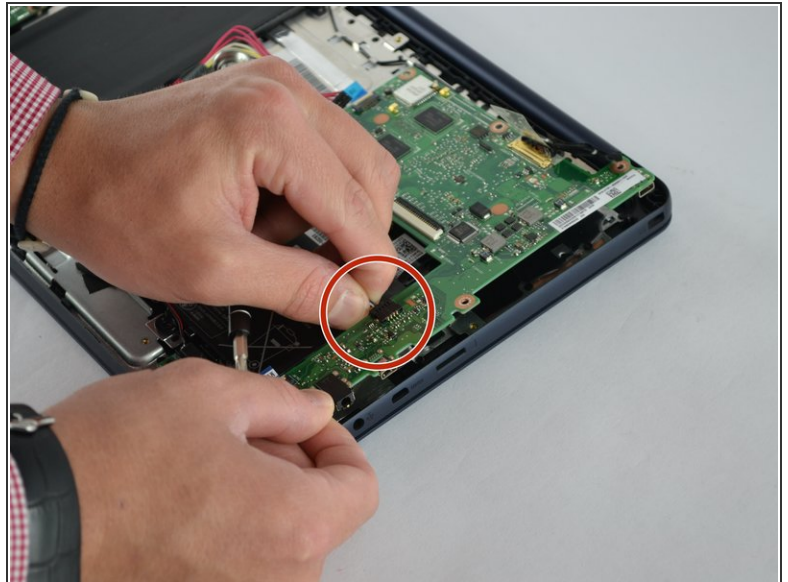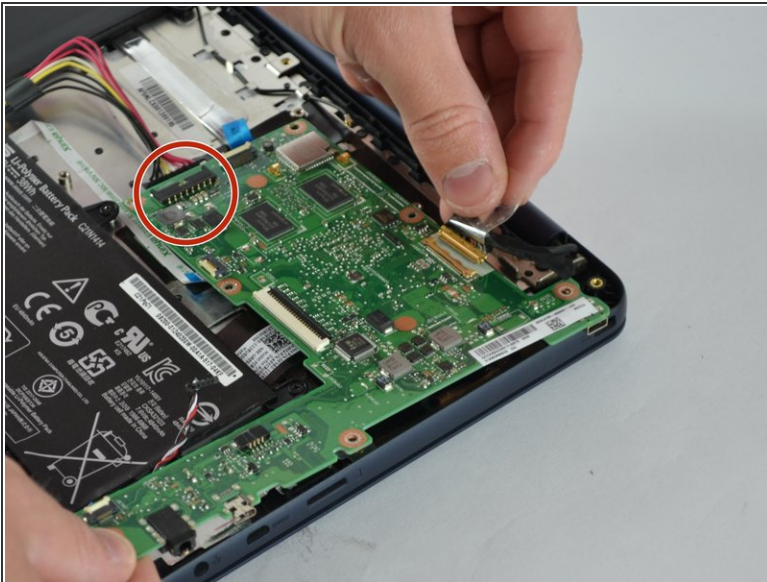

- Unplug the No-Fuss Ribbon battery, screen, and speakers from the motherboard.
- Carefully remove the ZIF screen connector.

To reassemble your device, follow these instructions in reverse order.