




# Zeepad 7DRK Battery Replacement

If short battery life is an issue with your Zeepad, there's a chance that the battery has to be replaced. Before taking the device apart, however, be sure that the issue is not with the battery charger, because this is a much easier replacement.

Written By: Alexandra Souza

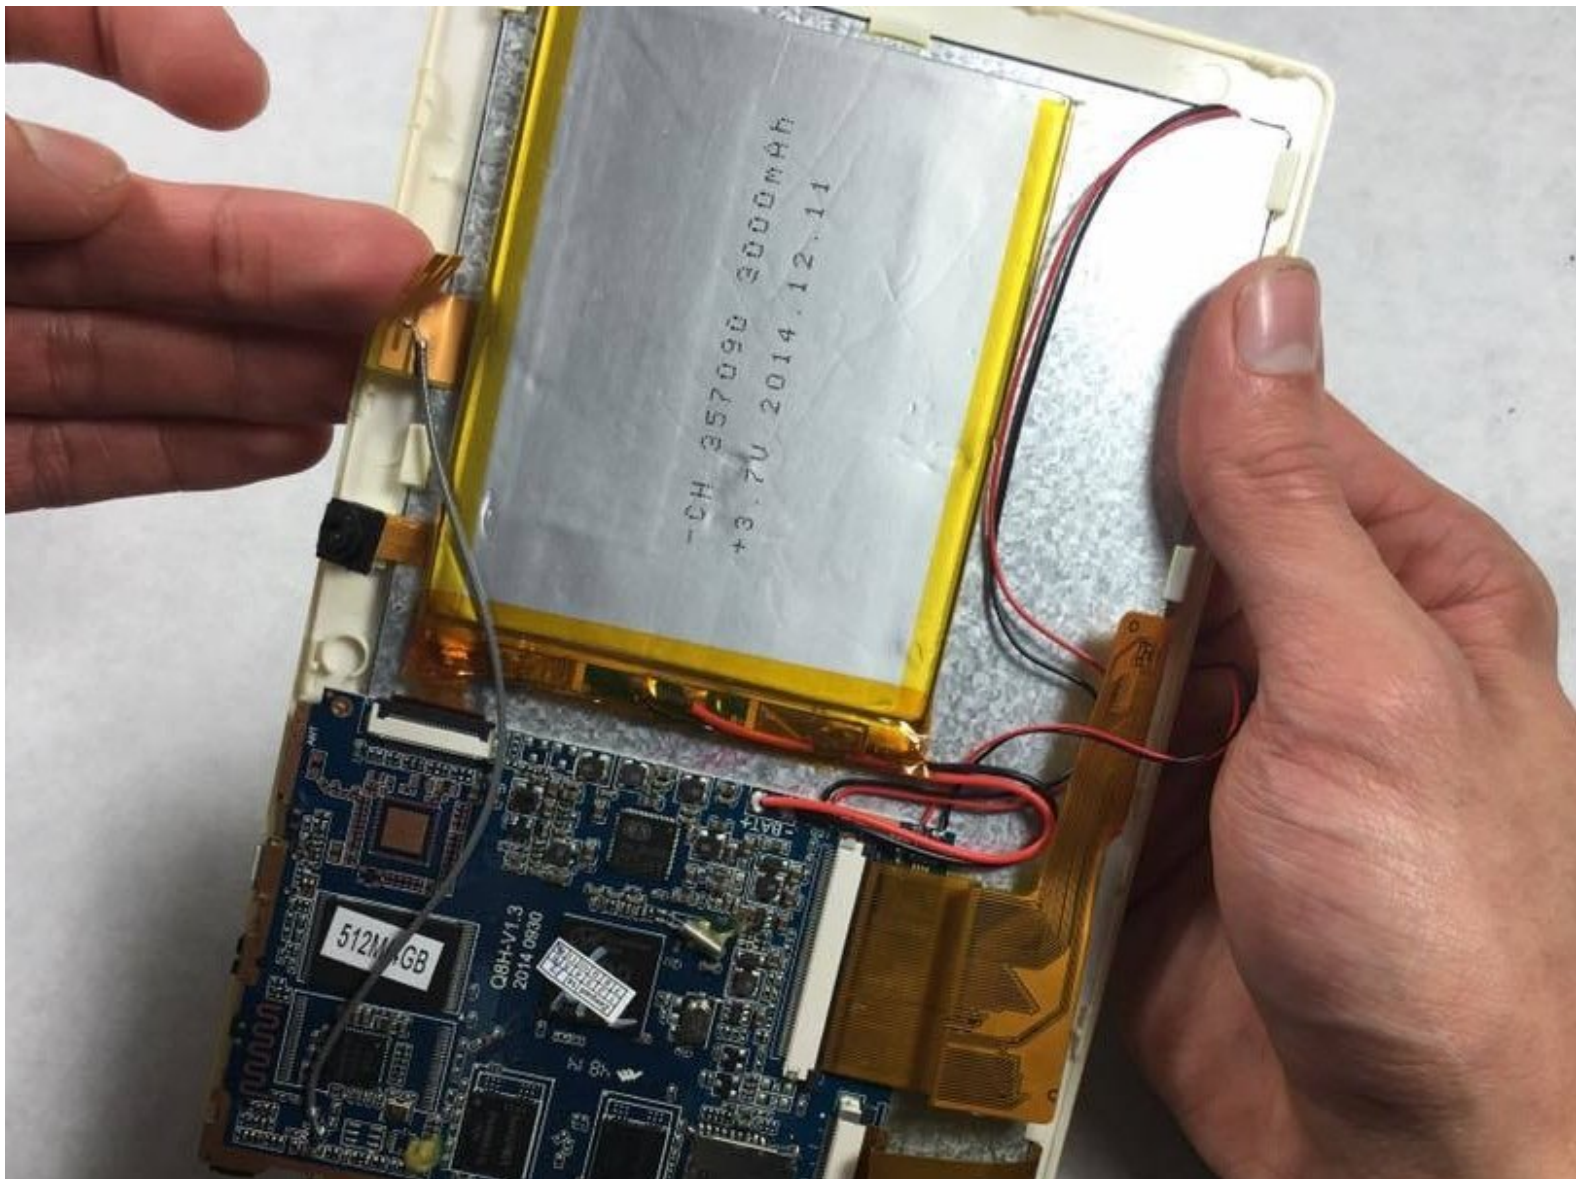

---

## INTRODUCTION

This guide is going to explain the process of deconstruction of the Zeepad 7DRK and eventual removal of the device's battery for easy replacement.

---

### TOOLS:


- [iFixit Opening Tools](#) (1)
-

## Step 1 — Battery



- Begin the process by prying off the back of the Zeepad using the opening tool.
- Start by edging the corner of the opening tool into the edge of the device and work your way from there until the back cover is removed.




## Step 2

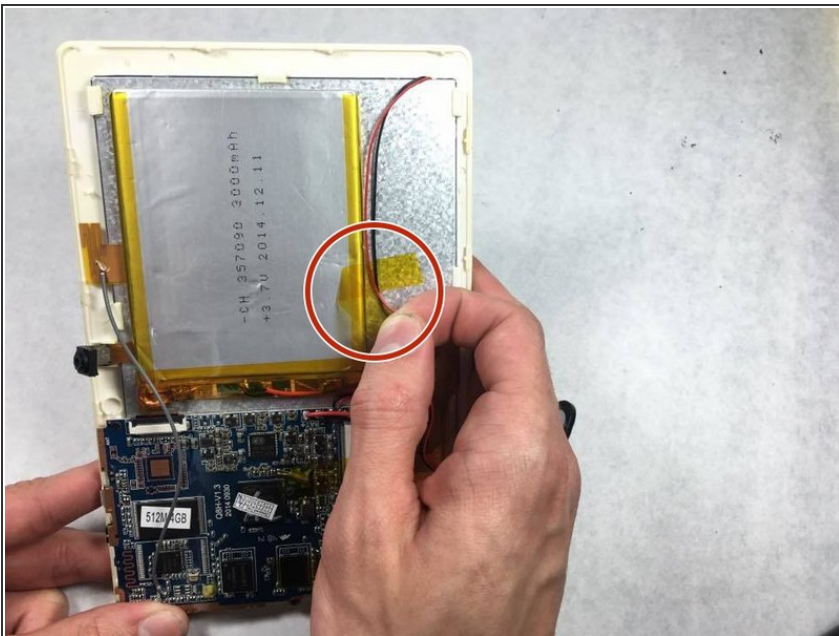

- Once the back casing has been removed, identify the location of the battery inside the device, marked with the red circle.






## Step 3

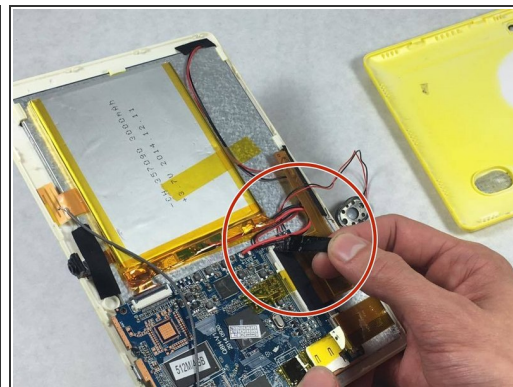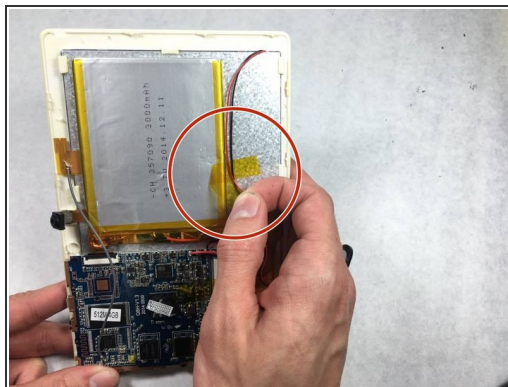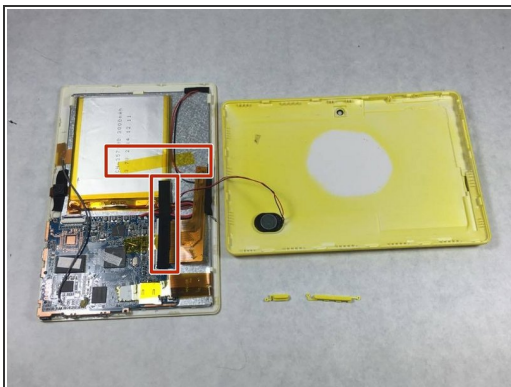


- Identify the pieces of tape holding the battery to the back of the screen, and peel them off to remove them.

## Step 4

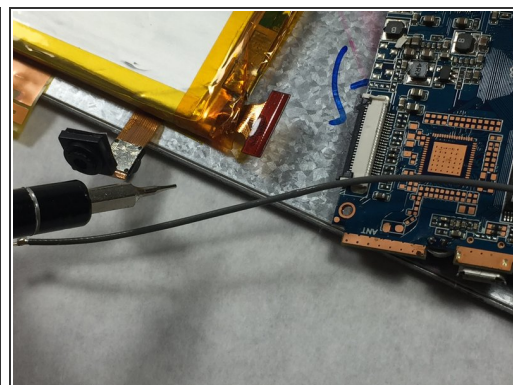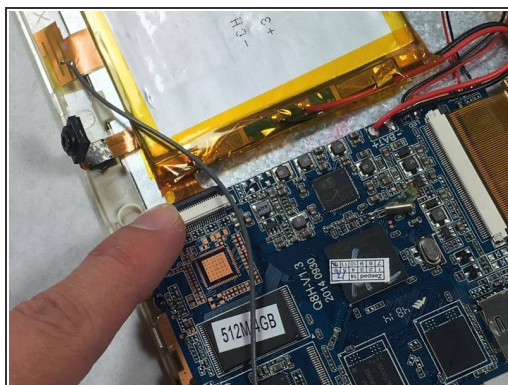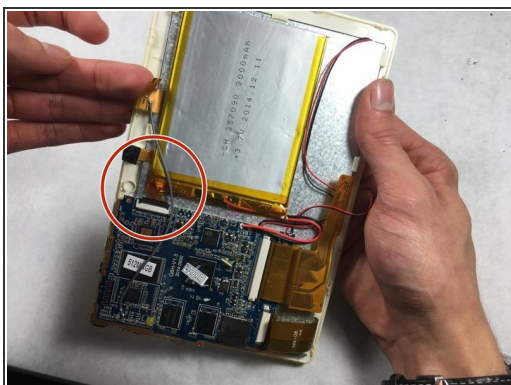

- Locate the connection between the battery and motherboard, and disconnect it by pulling the two apart.

## Step 5

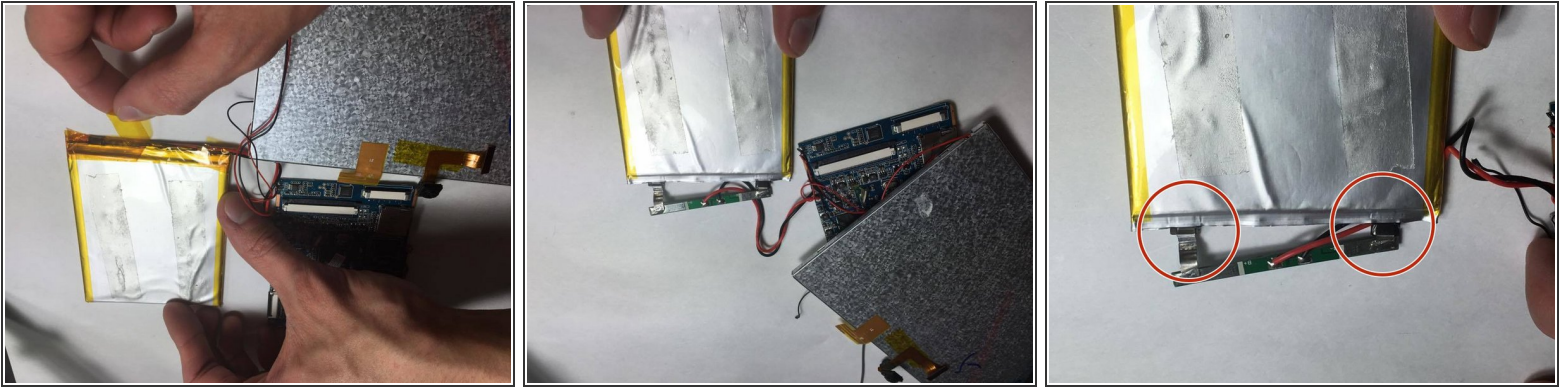

- To finally finish removing the battery, the two wires connecting to it must be separated.
- Peel back the tape covering the origin of the wires.
- Finally, remove the two metal connectors attached to the green piece from the battery with a tug.
- The battery has now been successfully removed.

To reassemble your device, follow these instructions in reverse order.