



# VTechCS6719-16 Screen Replacement

A guide on the replacement of the screen cover.

Written By: Charles montes



---

## INTRODUCTION

This guide demonstrates a walk-through of steps needed to completely dismantle the phone in order to locate the screen cover and replace it with a new one.

---



### TOOLS:


- [Phillips #0 Screwdriver](#) (1)
  - [Metal Spudger](#) (1)
-

## Step 1 — Screen



- Slide the back cover off the cause.

## Step 2

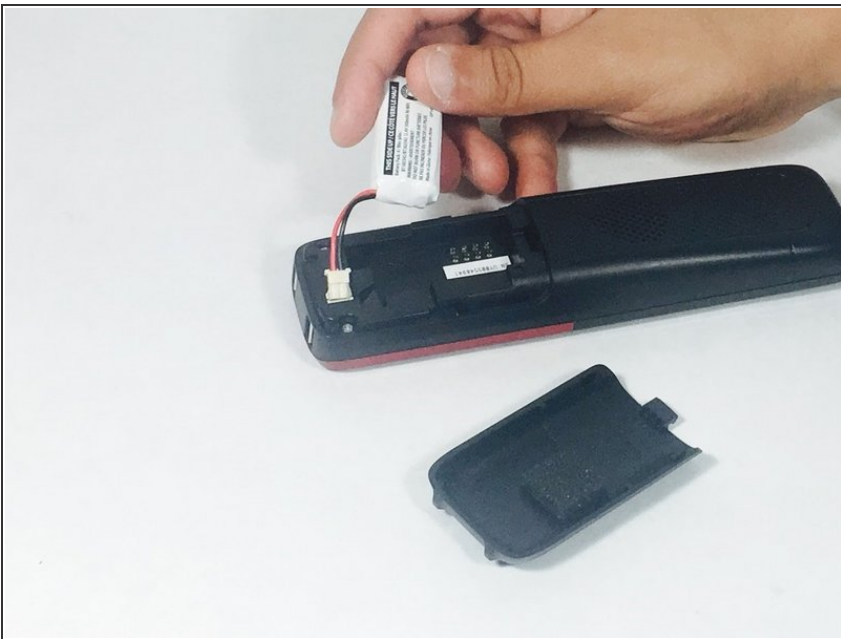

- Lift the battery.
- Unplug the two pin cable from the connector.

### Step 3




- Unscrew the two 10mm screws in phone base.

### Step 4



- ⚠ Using the metal spudger gently, but firmly edge along the device .
- When you feel a hook or latch use a firm but gentle lifting motion upward to unlatch the front and back case.

## Step 5

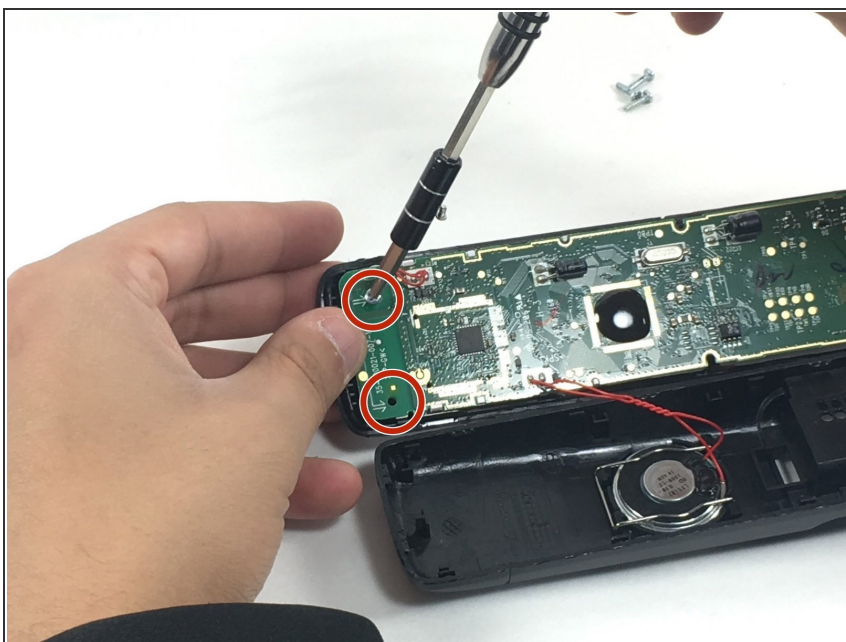

- Unscrew a second set of 10mm screws to access to the other side.

## Step 6



- ❗ The front case is now free and able to be manipulated.
- ★ Set aside the circuit board and back case as they will get in the way.



## Step 7



- Using a single finger apply a light force on the screen cover to release from the case.
- Now the old screen can be replaced with a new desired one, simply properly align and it will clip into place.

To reassemble your device, follow these instructions in reverse order.