



# Minolta QTsi Maxxum Lens Replacement

This guide will show you how to replace the piece of glass on the back lens of the camera.

Written By: Jordan Ellery



---

## INTRODUCTION

Replace the back piece of glass so that your pictures will be clear of scratches and cracks.

---



### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
-

## Step 1 — Lens




- i** The lens release button is located on the right front side of the camera.
- Remove the lens from the camera by pushing the lens release button.

## Step 2



- i** The detached module has multiple screws that must be removed in order to reach the lens.
- Once detached, remove the (4) black Phillips #00 5mm screws from the outer rim of the module.
- Next, remove the (2) remaining black Phillips #00 5mm screws.

## Step 3

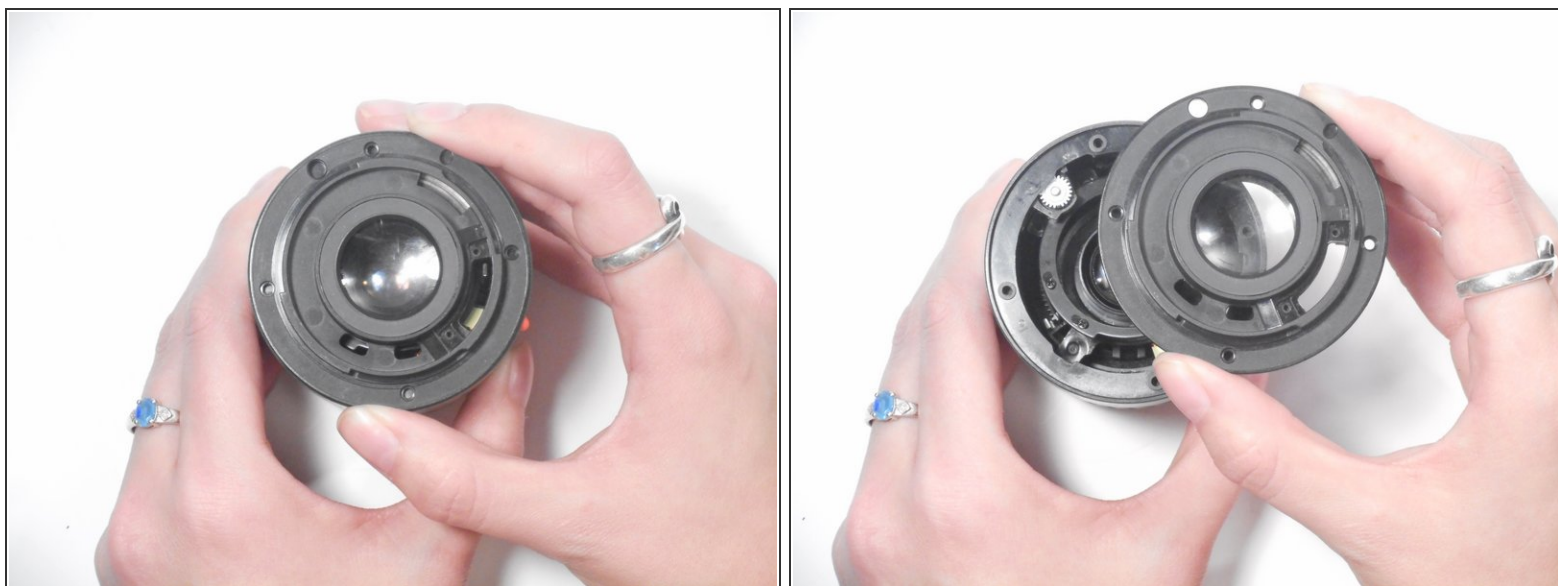

- Once all screws have been removed, take the back piece off of the lens and replace it.
- ⓘ This piece should come off easily without using any tools.
- ⚠ There is film underneath the last 2 screws that are removed so be careful when taking it out because it could rip.

To reassemble your device, follow these instructions in reverse order.