



HP Pavilion dv2913cl RAM Replacement

In this guide we will be removing the two RAM sticks.

Written By: Jeremy Jackson



INTRODUCTION

We will be opening the center panel and removing the two RAM cards.



TOOLS:




- [iFixit Opening Tools](#) (1)
-

Step 1 — Ram




- Unscrew the two screws on the center panel of the device .
- Then gently remove the center panel.

Step 2

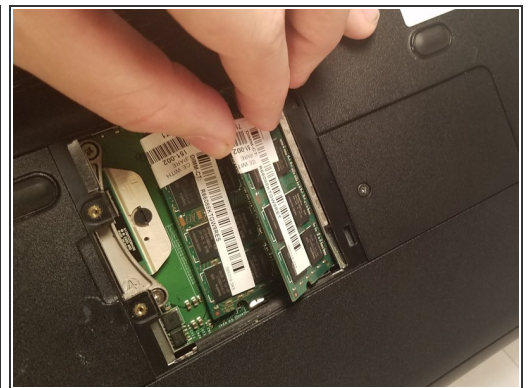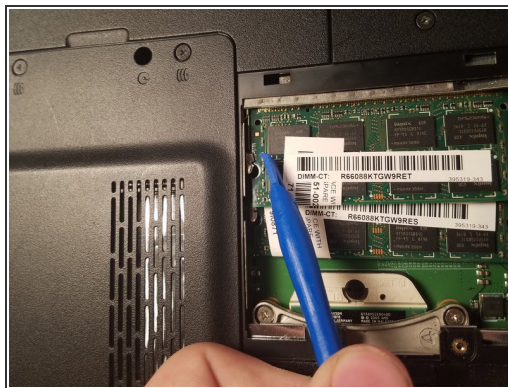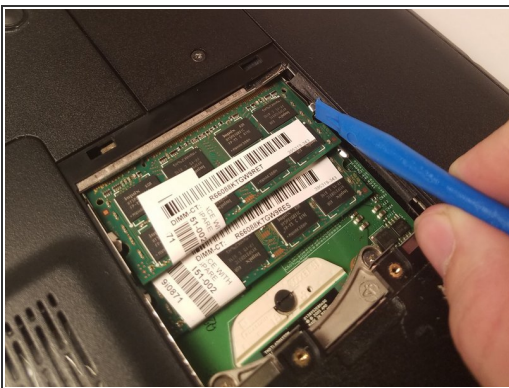


- Gently push the silver clamps on both sides of the RAM stick on top.
- ⚠ Pushing the clamps back could damage the device. push far enough to remove the RAM card.
- Now remove the RAM stick on top from the device.

Step 3

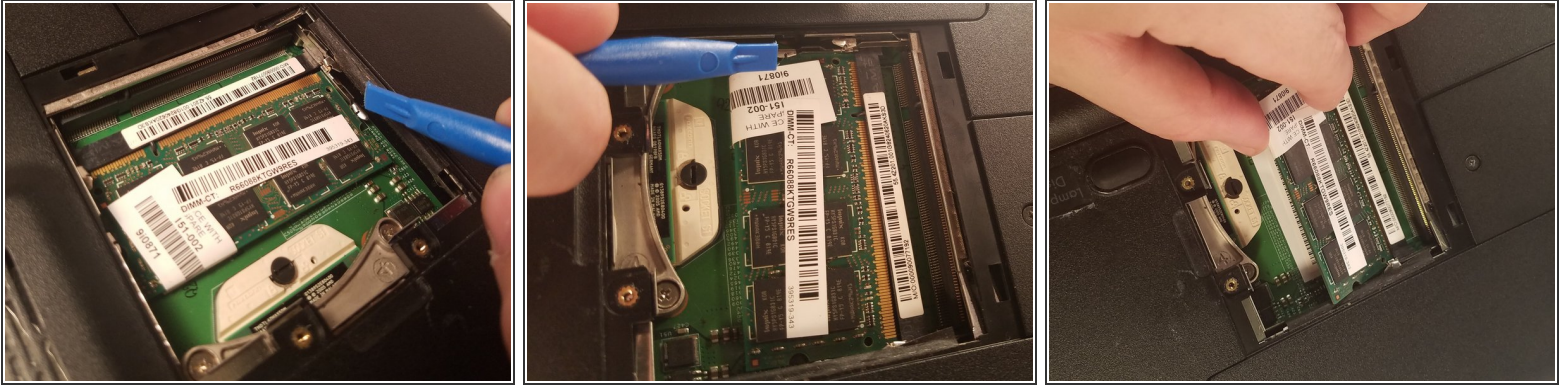


- Gently push the silver clamps on both sides of the bottom RAM stick.

 Pushing the clamps back could damage the device. Push gently just far enough to remove the RAM stick.

- Now remove the bottom RAM stick from the device.

Step 4



 this is the device with both RAM sticks removed.

To reassemble your device, follow these instructions in reverse order.