




HP Pavillion G7-2235DX Keyboard Replacement

This guide will show users how to disassemble and replace a keyboard, if necessary.

Written By: Bre'Anna Sanders

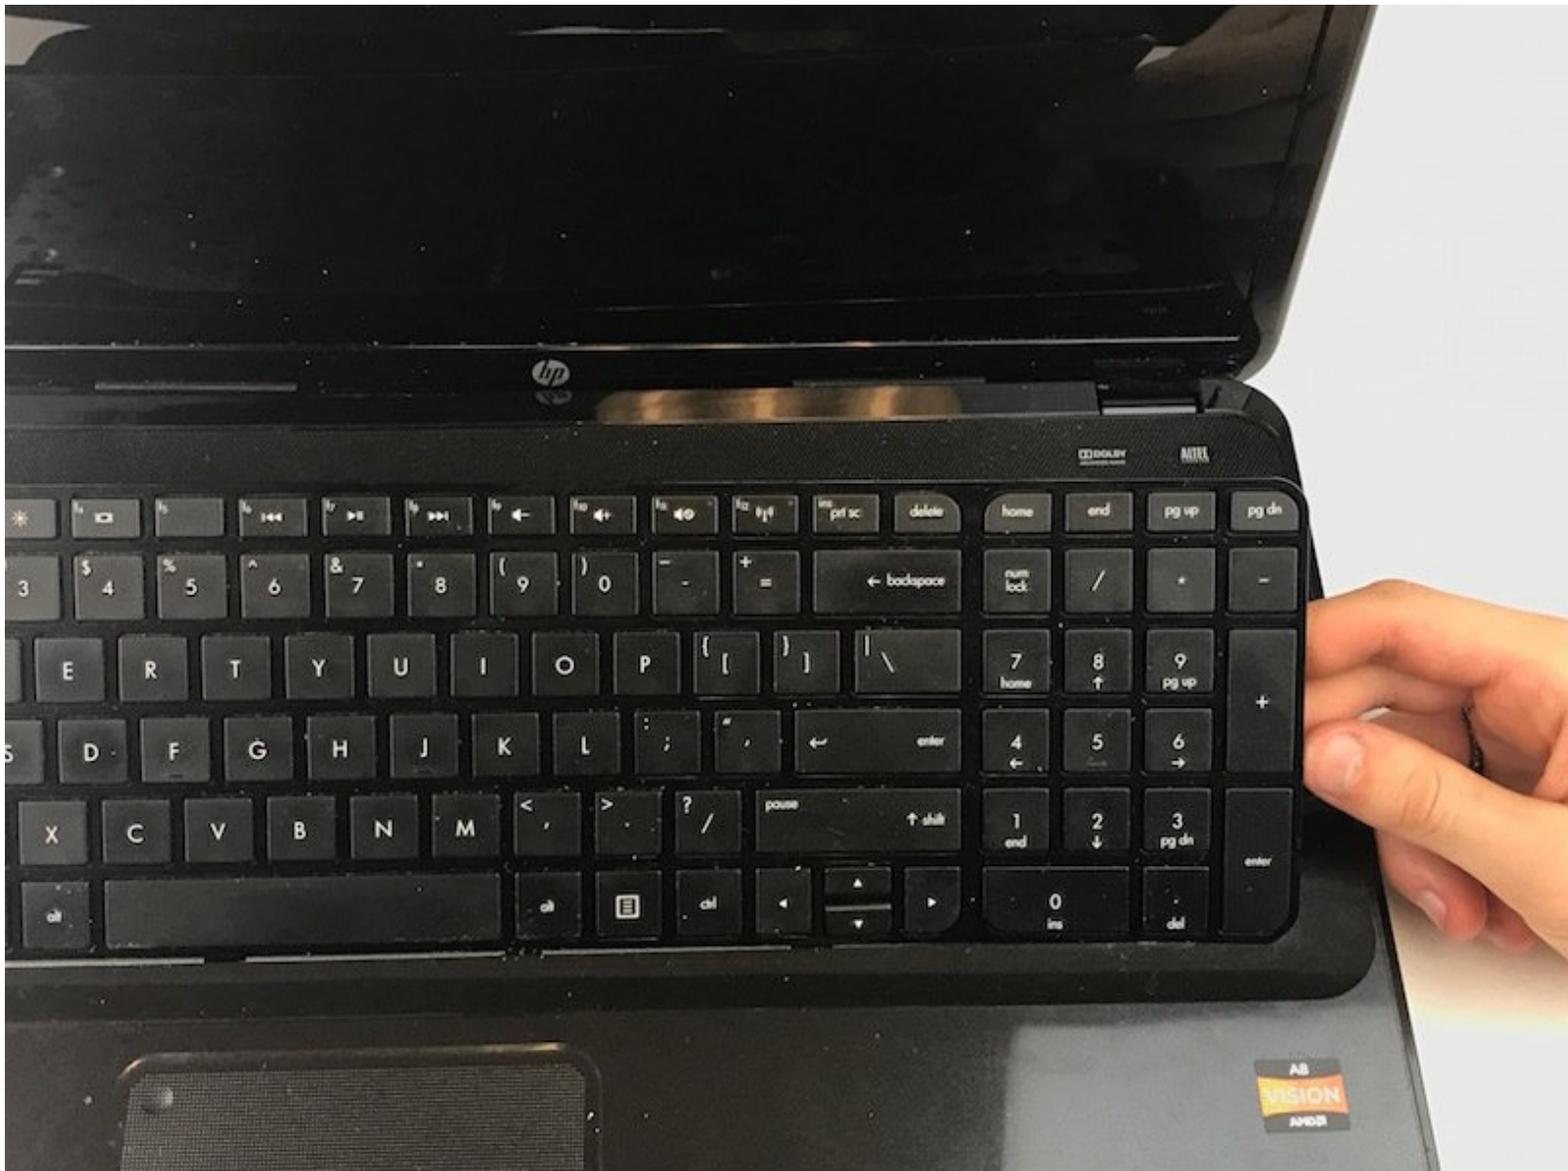

 **TOOLS:**

- [Phillips #00 Screwdriver](#) (1)
 - [Spudger](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Keyboard



⚠ Before beginning, make sure the computer is turned off and the charger is disconnected.

- Flip the computer over, so that the bottom is facing up.

Step 2




- To remove the battery, slide the battery switch to the left.

Step 3



- Using a PH Screwdriver, remove the three 7.25mm screws located on the bottom panel.
- After removing all screws, remove the panel by sliding down.

Step 4

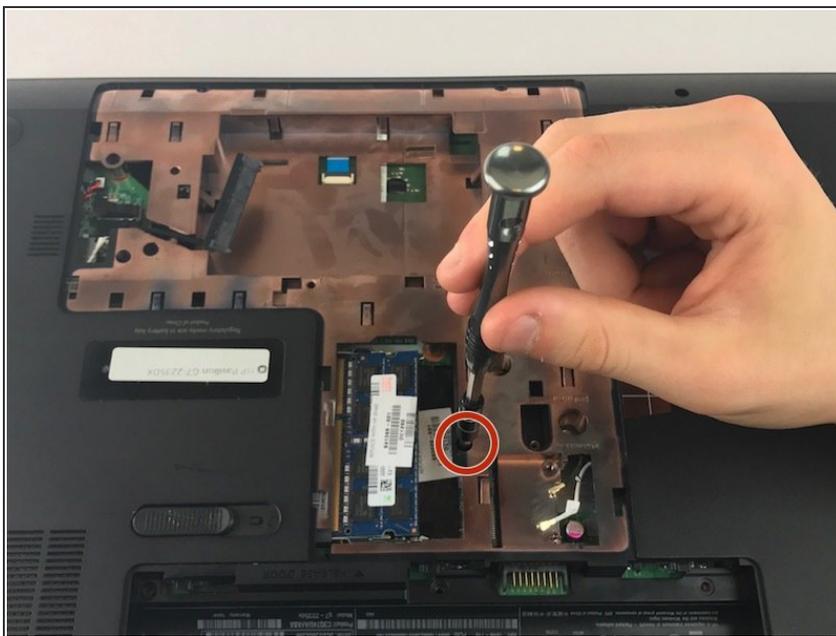

- Using a PH screwdriver, remove the screw adjacent to the white labels.
- ⓘ There is a keyboard icon next to the screw

Step 5




- Flip the laptop over, and open it.

Step 6



- Using a plastic spudger, pry beneath the keyboard near the "delete" key, and pop the keyboard up from the laptop.
- From the open gap, continue to pry around the perimeter of the keyboard, separating it from the laptop.

Step 7

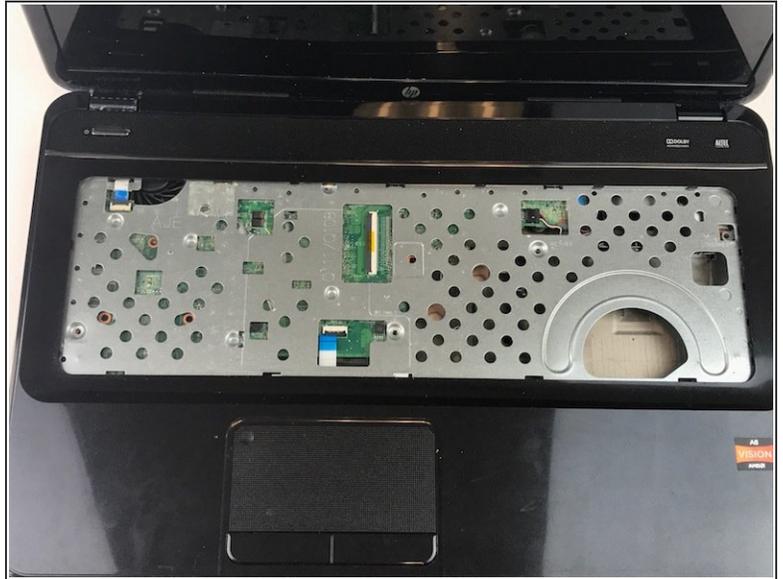

- Using both hands, carefully lift the keyboard off of the laptop.

 There may be a ribbon attached. If so, gently pull the ribbon cable up and away from the connector.

To reassemble your device, follow these instructions in reverse order.