



ILVE Microwave Replacement Bulb Replacement

Replace the interior bulb in an ILVE microwave. The glue around the bulb was a surprise!

Written By: Martin Hampton





TOOLS:

- [Metal Spudger](#) (1)
- [Mahi Driver Kit - 48 Bit Driver Kit](#) (1)
- [Leather Work Gloves](#) (1)

Step 1 — Remove the microwave from cabinate




- Remove the brown plug.
- The screw attaching the microwave is below

Step 2 — Remove the outer case



- Remove the cross point screws from the outer case back
- One screw has a tamper proof head so cut a slot in it and unscrew with a flat head screw driver.
- ⓘ Take caution to ensure that no metal shards fall inside the microwave. You may want to tape over the holes or wipe the area off with a damp cloth or paper towel once finished.

Step 3 — Remove the bulb socket

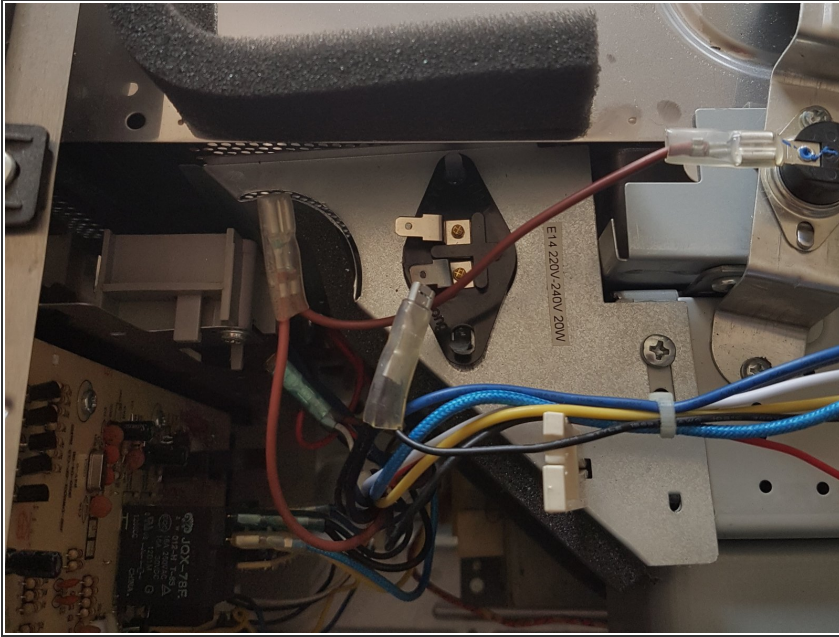

- The socket is on top right side of the microwave
- Remove the plugs
- Bend up the metal clips, and pull out the socket

Step 4 — Remove the bulb from the socket



- Remove the white glue (or sealer) that's around the bulb screw using a small screw driver.
- The glue goes all the way down the thread so remove as much as you can see.
- Use leather gloves to unscrew incase the bulb breaks. It need quite a lot of force so make really sure you've got every bit a glue out.

Step 5 — Re assmeble



- When you re assemble the outer case make sure the tabs on the front go either side of the front.

To reassemble your device, follow these instructions in reverse order.