




# Batterieausbau

It shows how the battery is removed.

Written By: Leonard Kesting

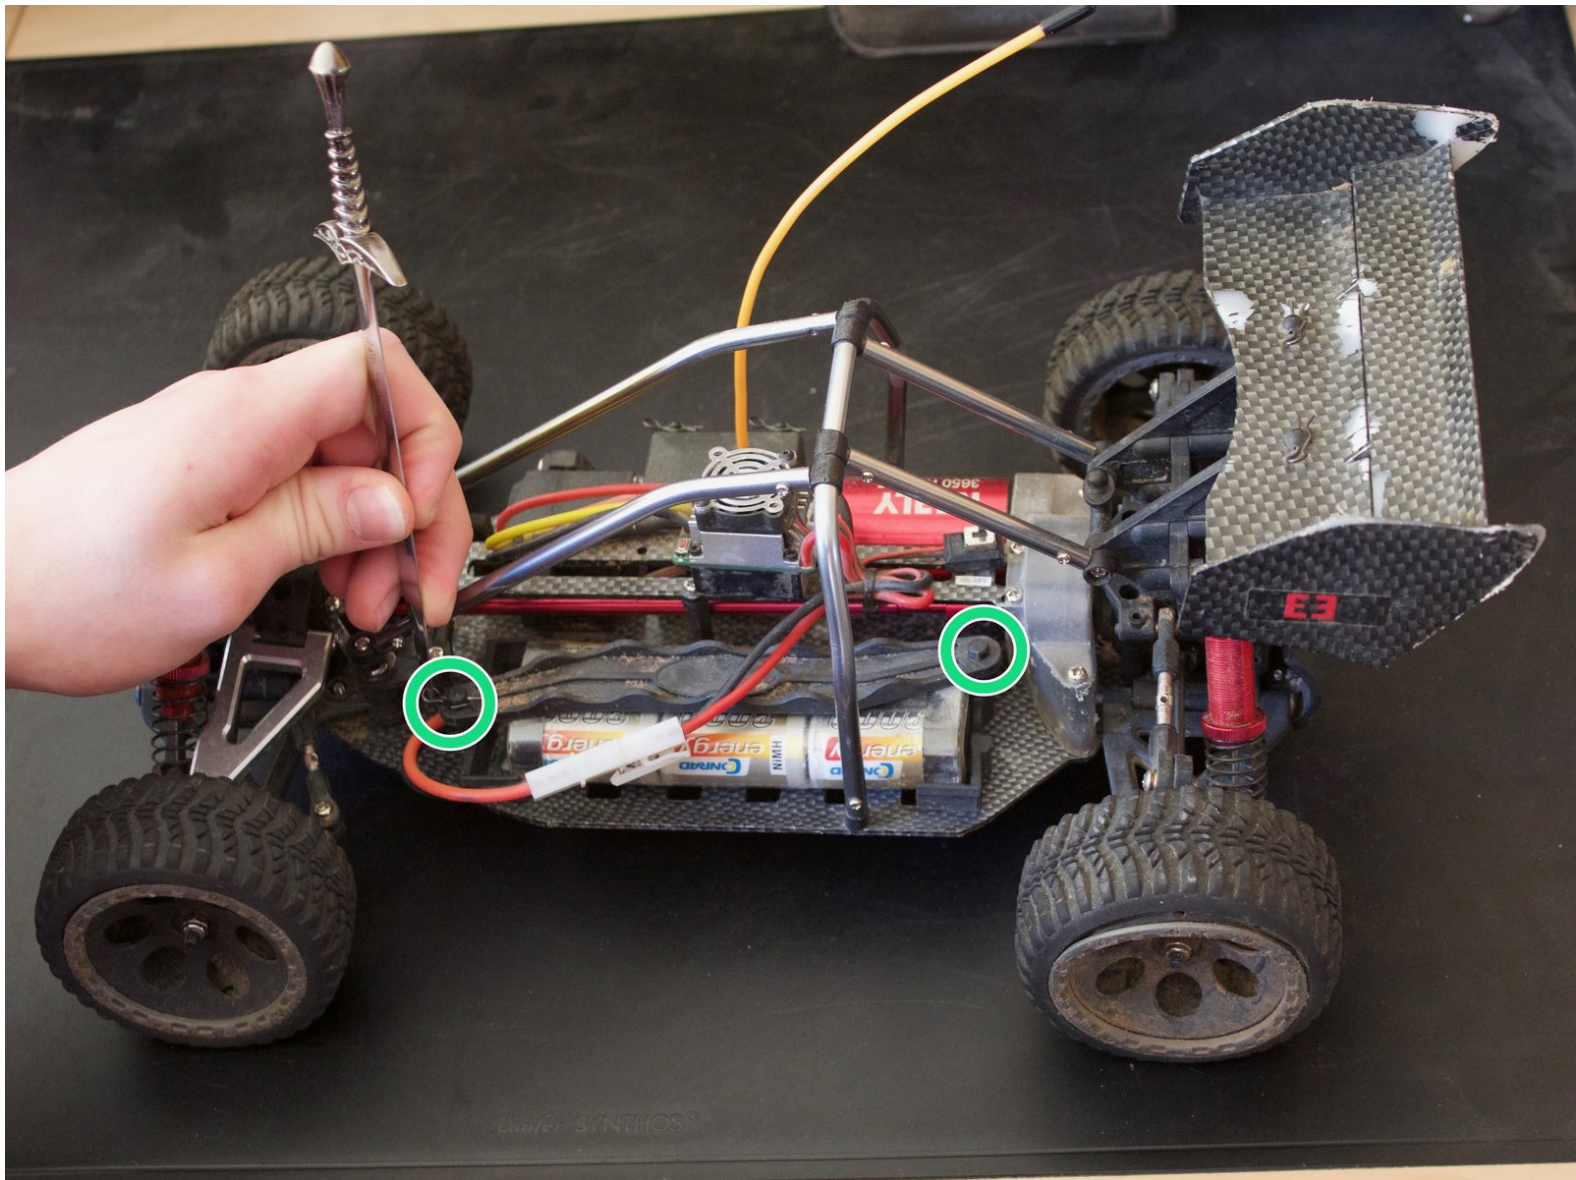

---

## INTRODUCTION

It shows how the battery is removed....



### PARTS:

- [New Item](#) (1)

NiMh 2000mAh


*möglicher Akku*

- [New Item](#) (1)

*falls gebrochen oder verloren*

---

## Step 1 — trim loss

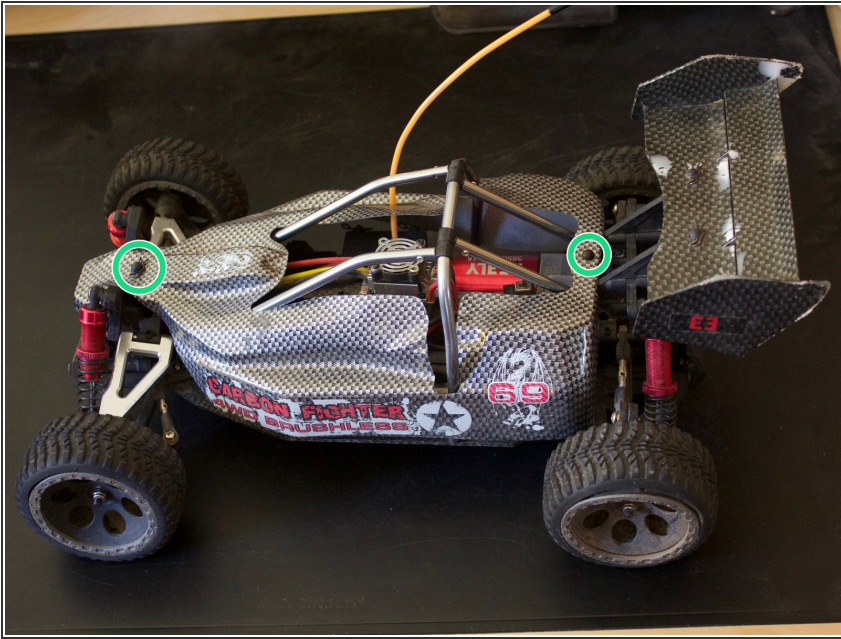

- These two pins must be removed.

## Step 2



- Here, a screwdriver or other stable thin object (in the picture: letter opener) can be helpful




### Step 3




- i** TIP: if you remove the cladding more often (for example, for thorough cleaning), it may be helpful to provide the splints with some insulating tape, so the use of tools is unnecessary

### Step 4

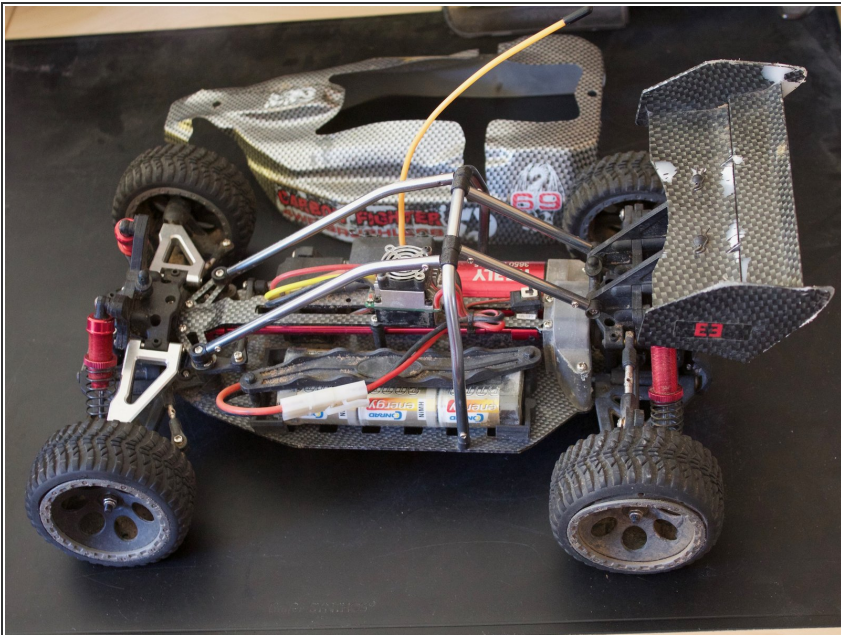

- The panel is now dismantled


## Step 5 — Batterieausbau

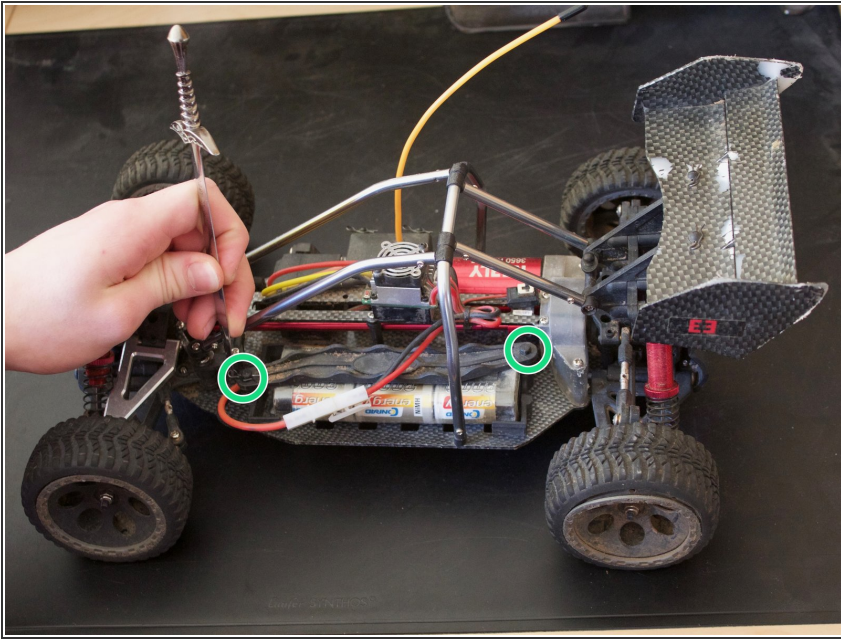

- These two pins must be removed




## Step 6

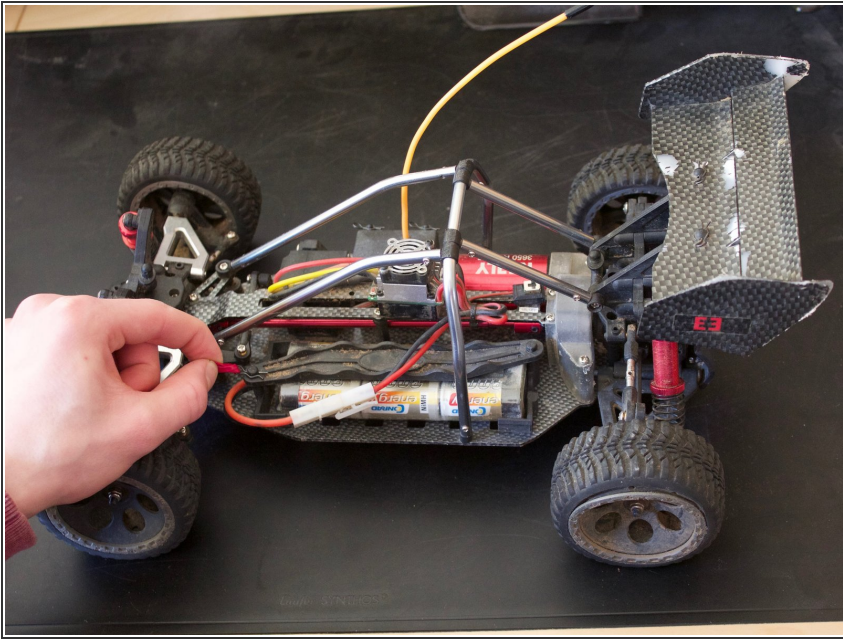


- i** TIP: Since this work has to be done more often, it is recommended to provide the cotter pins with some insulating tape so that they can be removed without tools

## Step 7

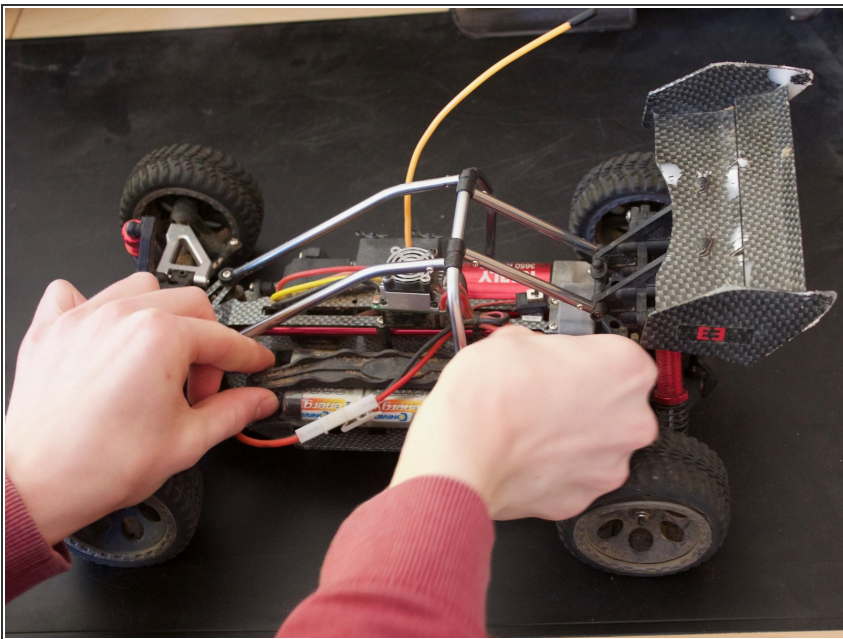



- The battery holder can now be pulled off upwards

## Step 8

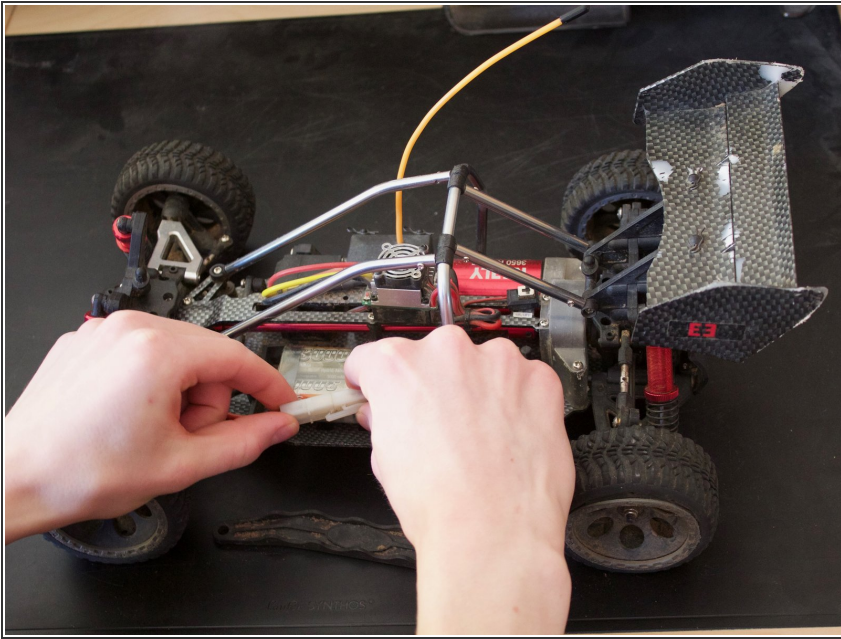

- Now the battery connection is disconnected


## Step 9

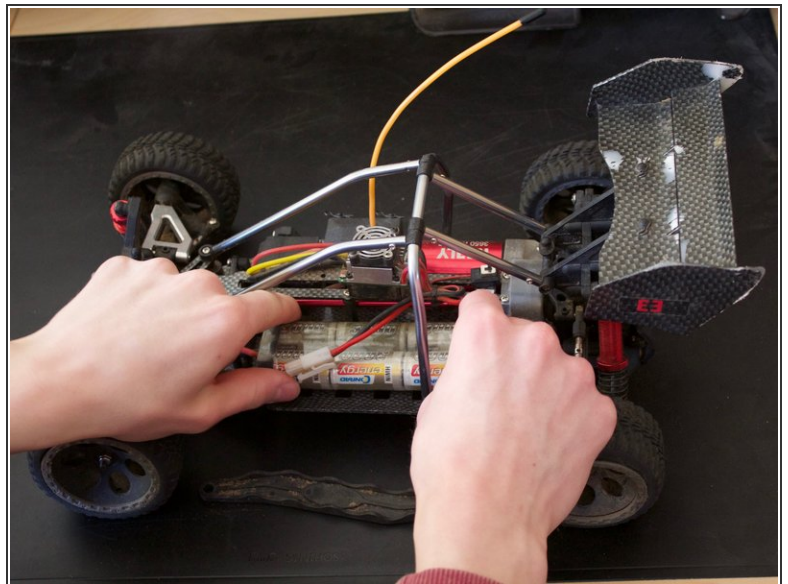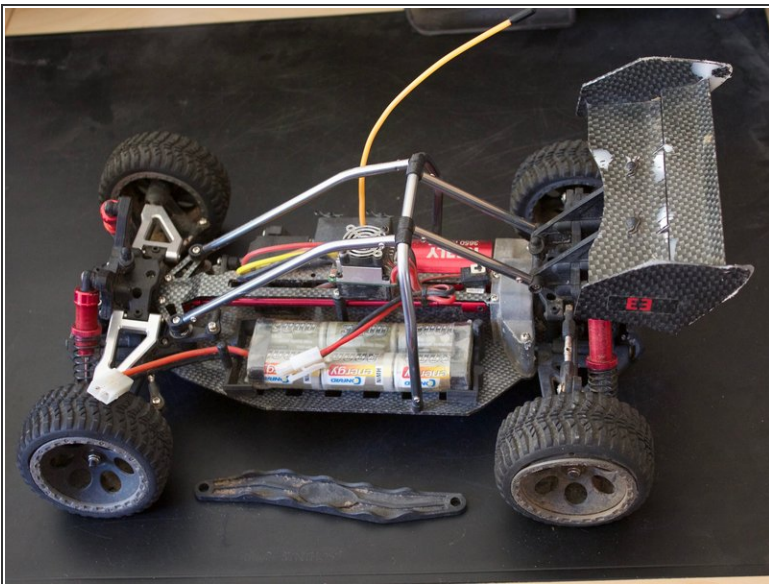

- And the battery can be removed upwards



## Step 10

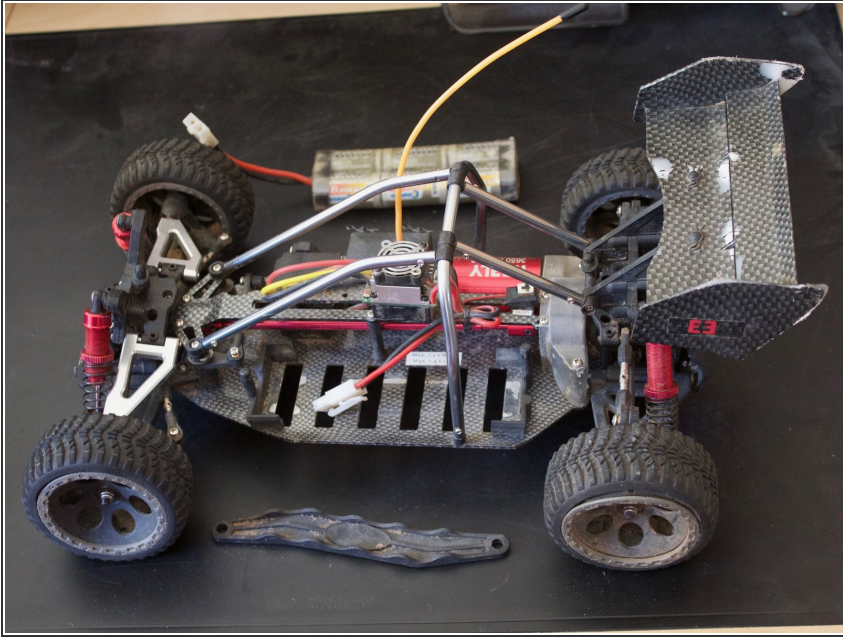

- The battery can now be charged

Repeat the steps in order to reassemble your device.