



# DeWalt DW936 Plastic Cover Replacement

Need to get inside my saw nd take off the plastic cover.

Written By: Scott Weinhardt



## INTRODUCTION


This guide will show you how to take off the plastic cover on the saw, so you can get to the inside components.



### TOOLS:


- [T20 Torx Screwdriver](#) (1)
  - [T15 Torx Screwdriver](#) (1)
-

## Step 1 — Plastic Cover

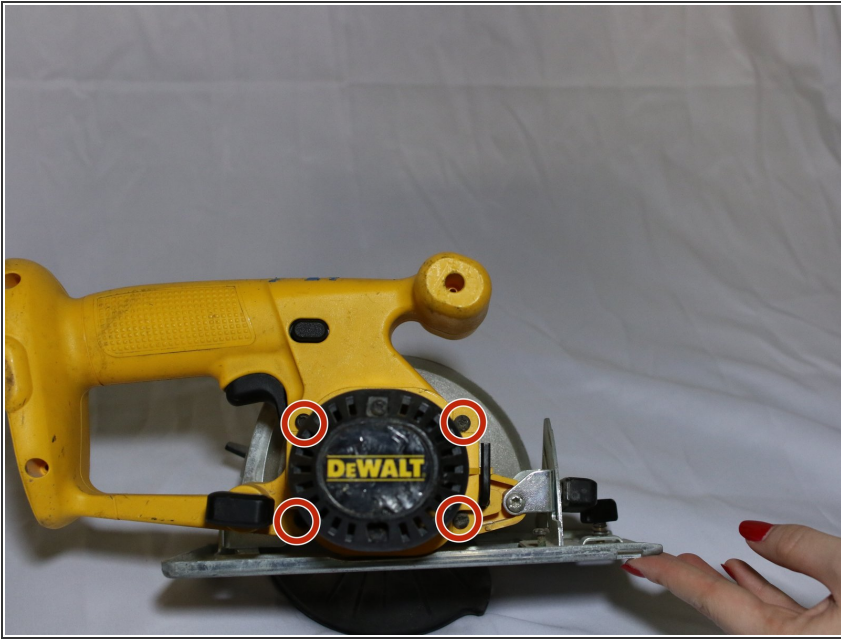


- Use a T-20 hexhead screw to unscrew 4 hexagonal screws surrounding the base of the black air filter. The screws are on the yellow portion.

## Step 2

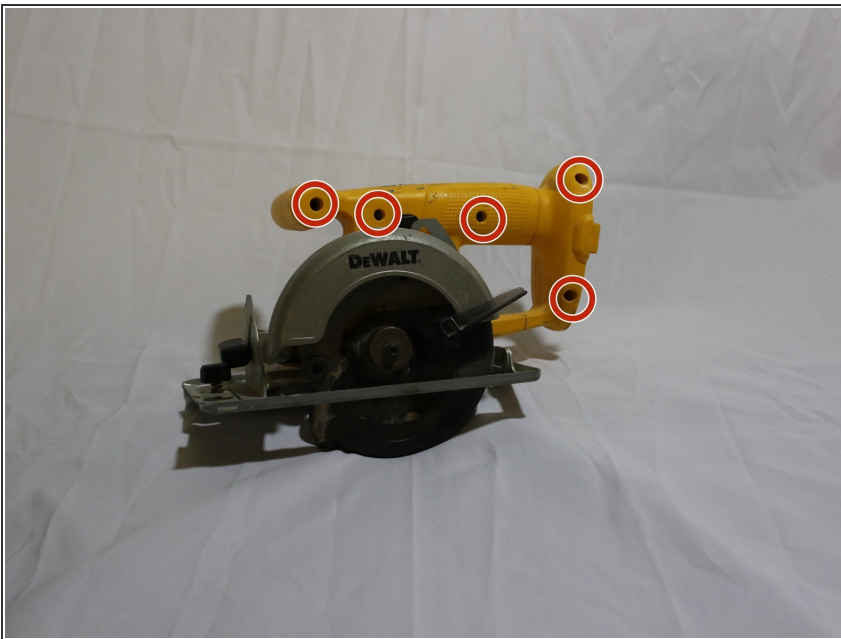


- Use a T-15 hexhead screw to unscrew 5 hexagonal screws. These screws are located on the opposite side of the saw from previous step.

### Step 3

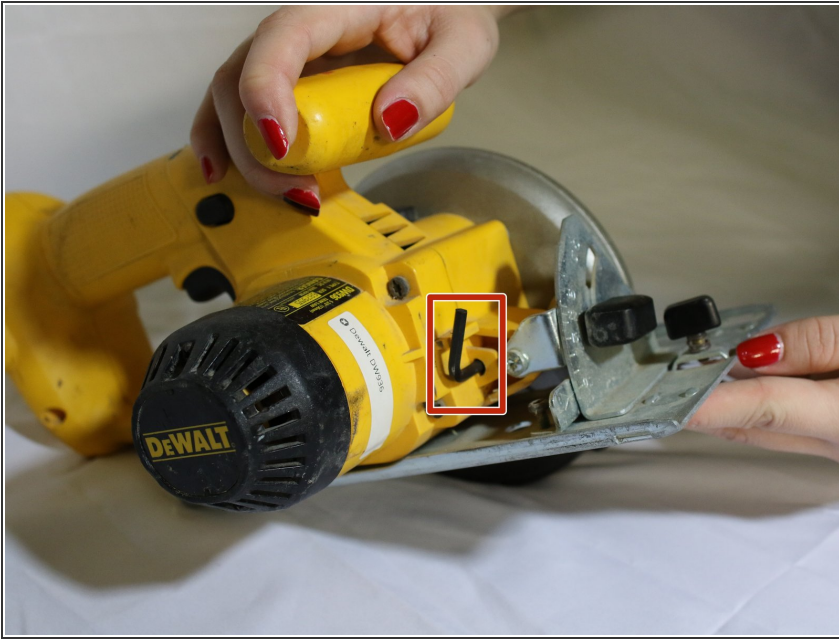

- Remove Allen Key.

### Step 4

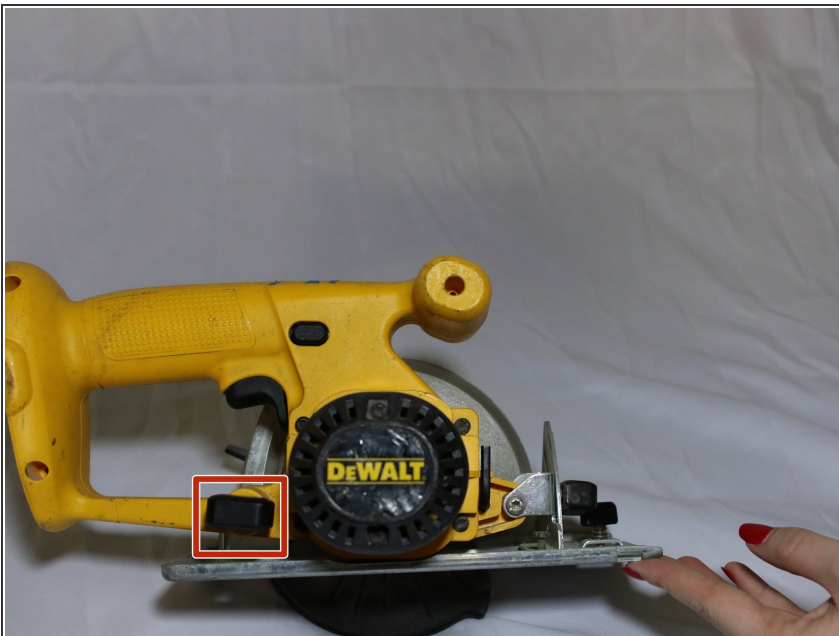

- Unscrew the black plastic knob underneath the trigger.



## Step 5



- Grab hold of the black air filter portion and pull off.

## Step 6



- This is what the inside of the saw looks like.

To reassemble your device, follow these instructions in reverse order.