

# Insignia NS-HTMC01-B Power Indicator Light Replacement

Replace the power indicator light of your Insignia NS-HTMC01-B heater.

Written By: Emma Walters



This document was generated on 2020-11-28 05:38:18 AM (MST).

## **INTRODUCTION**

Replace the power indicator light of your Insignia NS-HTMC01-B heater.



# **TOOLS:**

• Phillips #00 Screwdriver (1)

#### Step 1 — Front Case







- Flip the device over so the back panel faces up.
- Unscrew the four screws counter-clockwise from the back panel using a 4mm Phillips screwdriver.
  - (i) You may want to use a flashlight during this step, as the screws are hard to see.
  - Make sure to firmly connect your screwdriver with the head of the screw. A loose connection can strip the screw head, making the screws nearly impossible to remove.

#### Step 2




- Take the screws out and set them aside.
  - i Be sure to set them somewhere flat, so they don't roll away.
- Gently pull the front panel and back panel apart to open the device.

#### Step 3 — Power Indicator Light





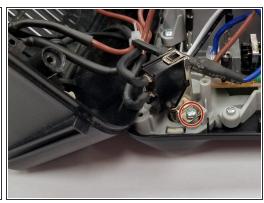

- Locate the bottom left corner below the fan inside of the heater.
  - There is a small black rectangular box with two cables coming out of it.
  - Using a Phillips #4 screwdriver, unscrew the two screws at the base counterclockwise, and set the screws to the side.
    - ♠ Be sure to set the screws on a flat surface to ensure they don't roll away.

#### Step 4








- After unscrewing the black rectangular box up from the base of the grey frame, locate the small green rectangular light fixture.
  - Unscrew the one screw from the green rectangle counter clockwise, and set the screw to the side.
- Gently lift the green circuit board out of the socket by pulling on the black and white cables.
  - (i) At the end of the green rectangle is a light-emitting diode (LED). This is what lights up the power button.

## Step 5

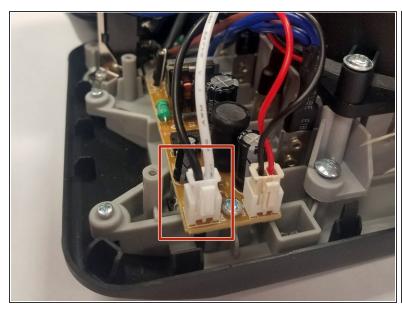



- To replace the LED, unplug the white jack with the black and white cords from the bigger tan circuit board.
- Remove the LED cord.

To reassemble your device, follow these instructions in reverse order.