




The Beatles Rock Band Hofner Bass Back Plate Replacement

Guide to replace the main casing of the guitar.

Written By: Jacob

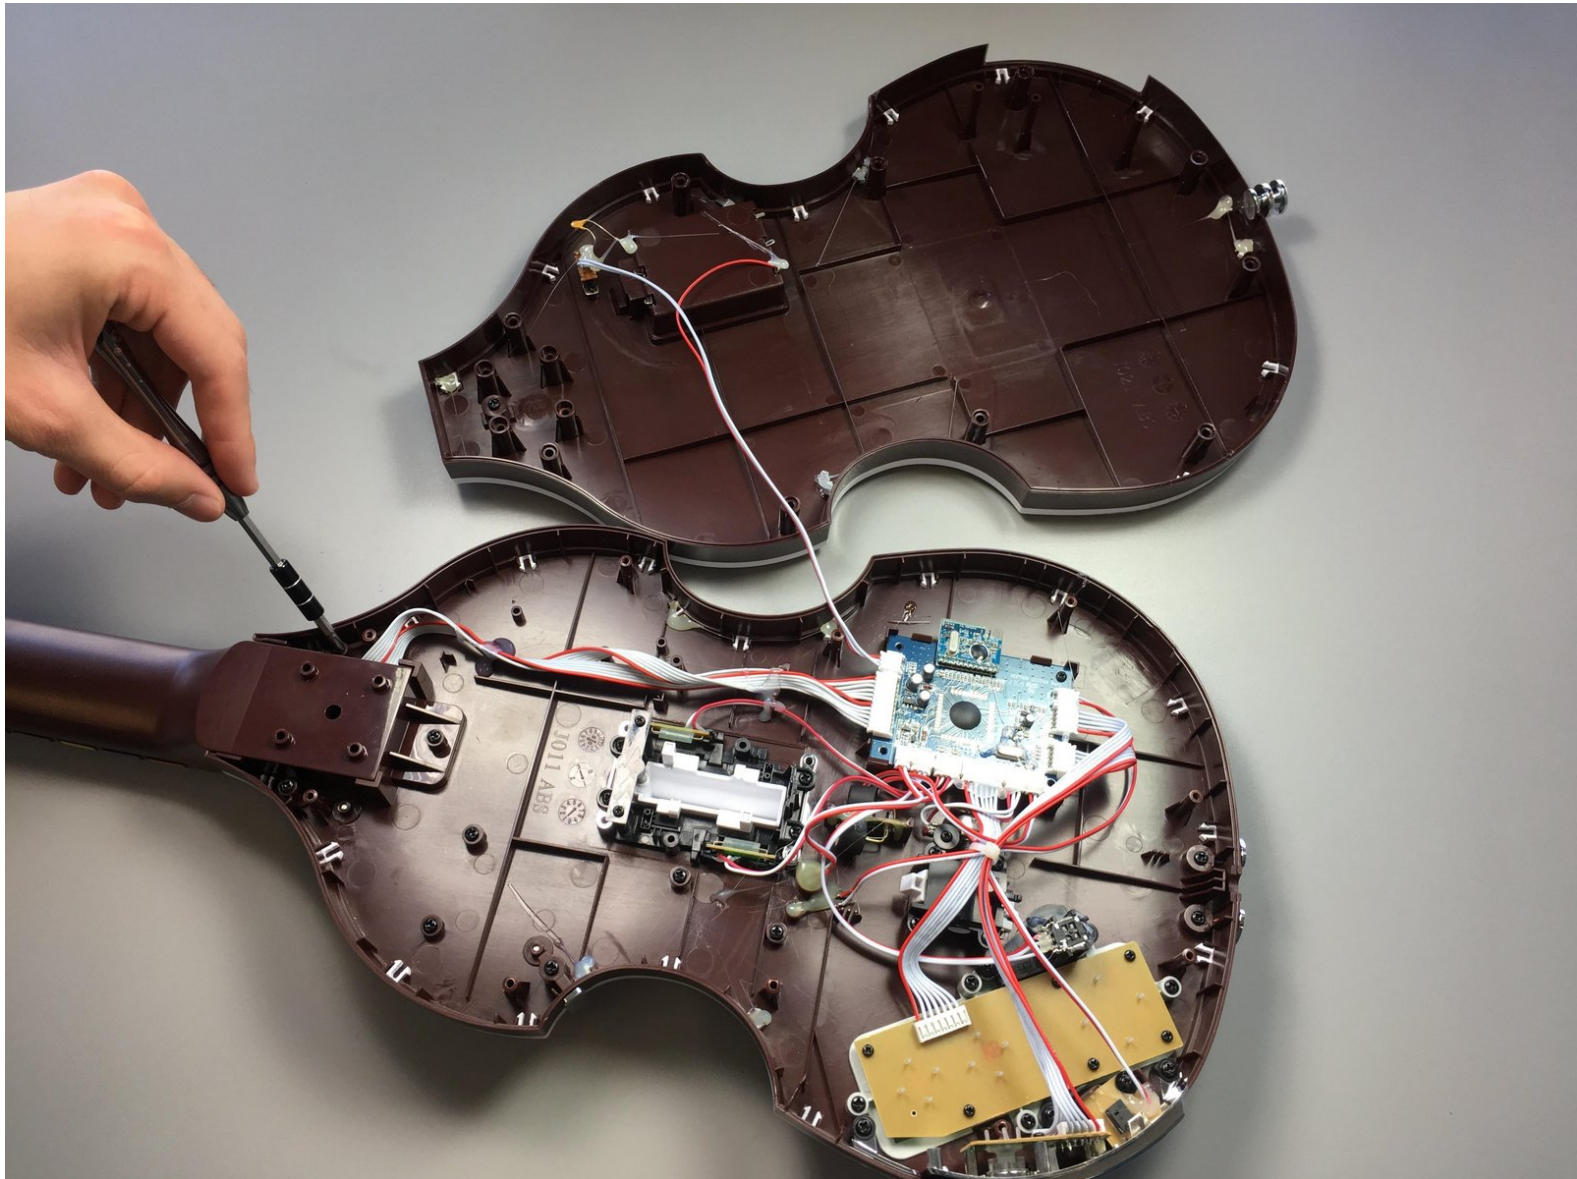

INTRODUCTION


This guide shows how to replace the back casing of the guitar.



TOOLS:


- [JIS Driver Set](#) (1)
-

Step 1 — Back Plate

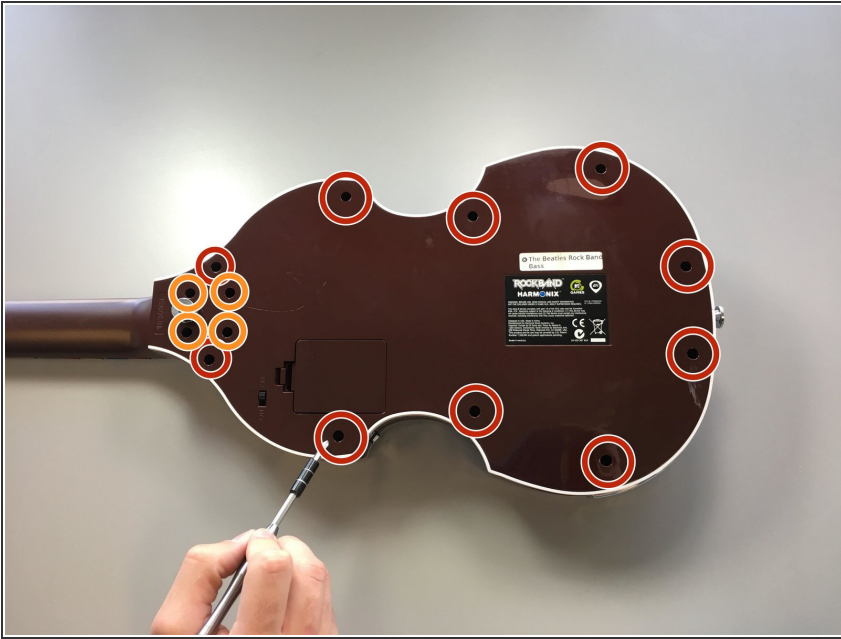



- Flip the bass onto its backside, so that the strummer is facing the table and the battery compartment is facing you.
- Use a J1 Phillips head screwdriver to remove ten 5mm short screws.
- Use a J1 Phillips head screwdriver to remove four 5mm long screws.

Step 2

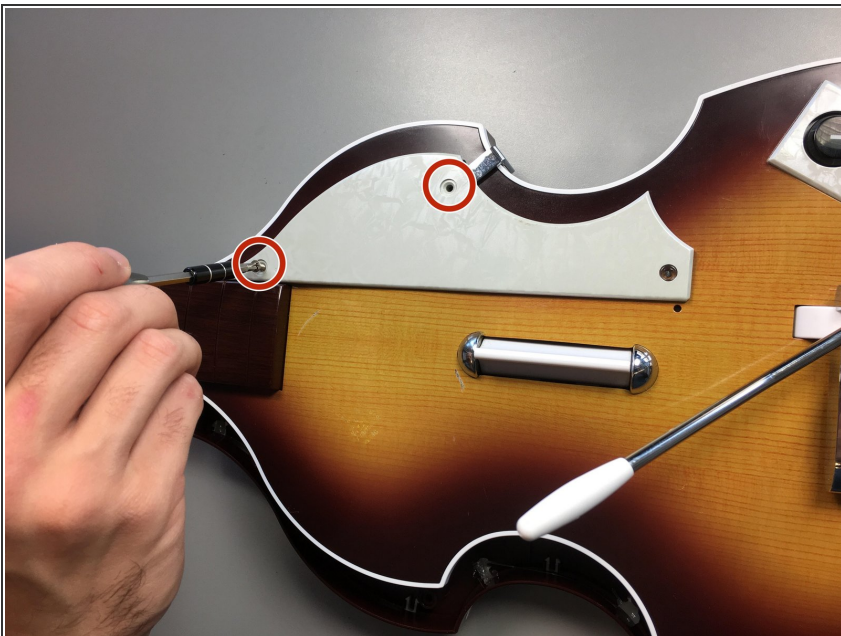

- Flip the bass to the front, with the strummer and fret buttons facing you.
- Use a J1 Phillips head screwdriver to remove two 10mm silver, short screws.

Step 3

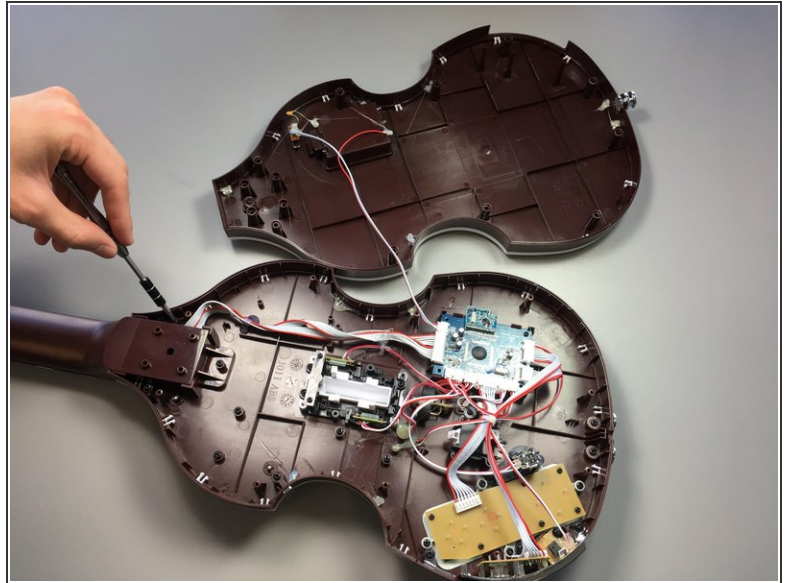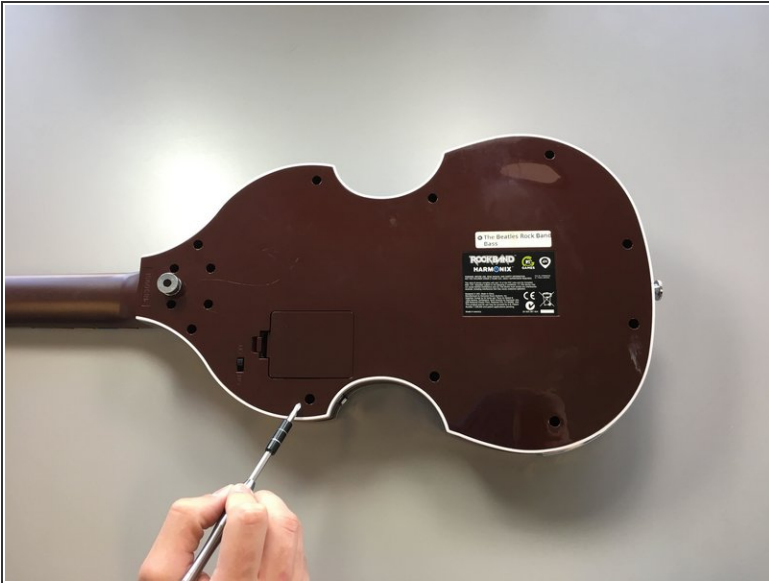

- Flip the bass on its back again, so that the strummer is facing down and the battery compartment is facing you.
- Pull off the back whole panel so that the bass is now open.

To reassemble your device, follow these instructions in reverse order.