



Atari 2600 Jr. Rev. A Disassembly

How to disassemble the Atari 2600 Junior to remove the circuit board.

Written By: Aislinn



INTRODUCTION

How to disassemble the Atari 2600 Junior to remove the circuit board.



TOOLS:



- [3/16" Phillips Head Screwdriver](#) (1)
 - [Heavy-Duty Spudger](#) (1)
-

Step 1 — Remove the base




- Remove 5 Phillips screws from base.

Step 2 — Detach the Case

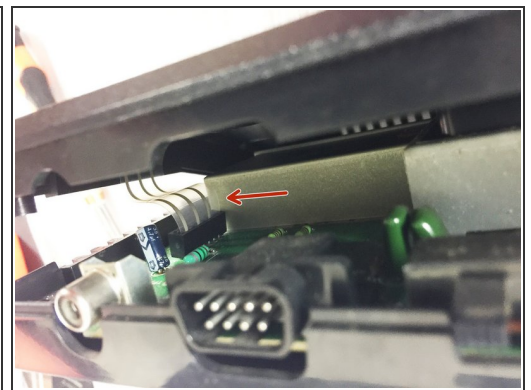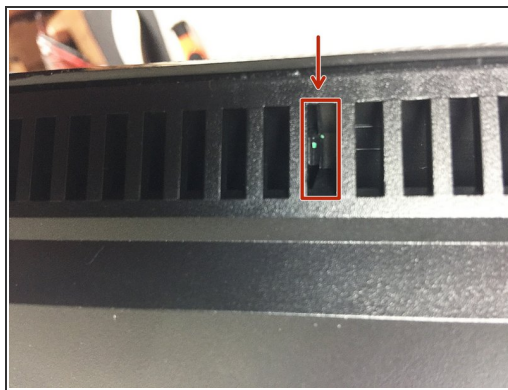



- Use a metal or heavy duty spudger to unhook the 3 plastic clips holding the front of the case together.
- Be careful not to break the plastic clips
- While unhooking the center hook use another spudger to run along the top and bottom casing. This helps to get the clip loose.
- Be careful not to pull the case apart quickly, there is a ribbon that is attached to the top and bottom.

Step 3 — Detach the Ribbon

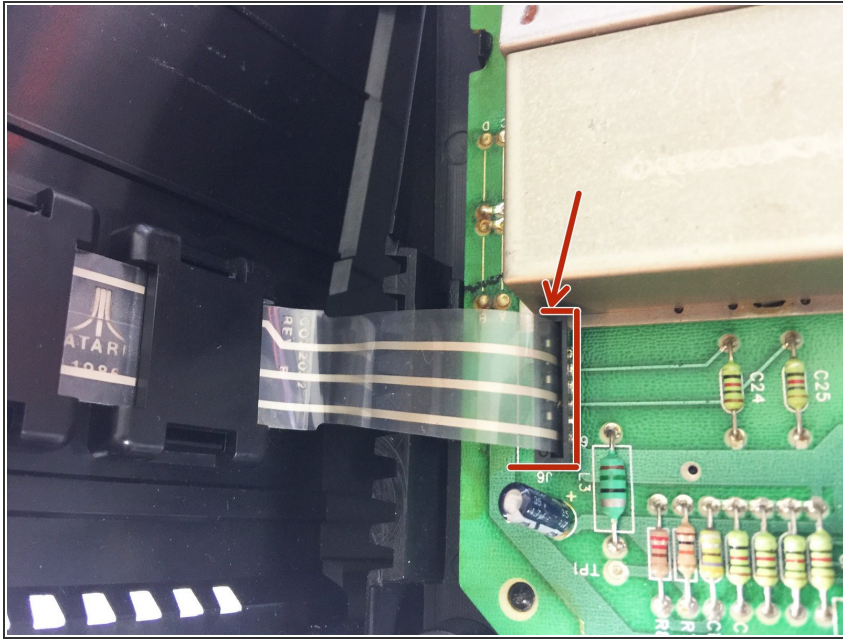

- Detach the ribbon from the circuit board by gently pulling ribbon out from clip.

Step 4 — Remove Circuit Board from Base

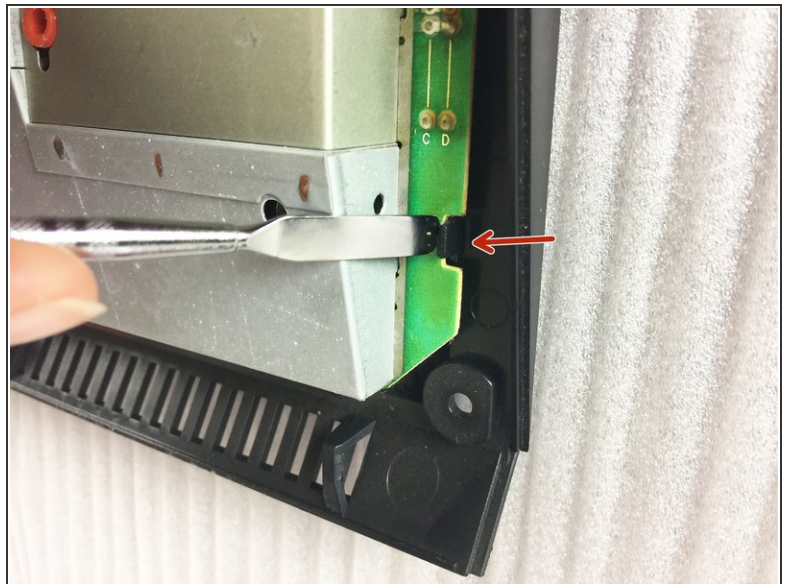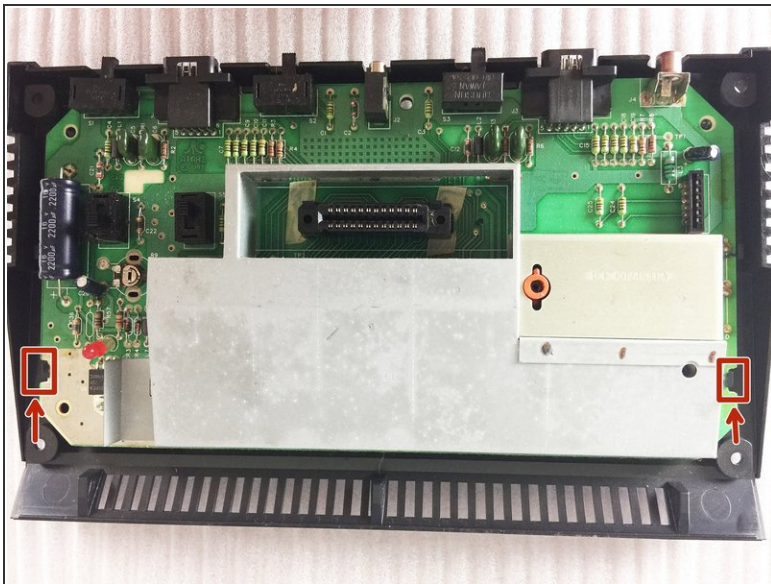

- There are 2 clips holding the circuit board in place.
- Using a metal or heavy duty spudger release the clip on the left side.
- Remove the circuit board.

