



# Disassembling Ericsson CF 388 Circuit Board

Written By: Niccolas Tones



---

 **TOOLS:**


Tweezers (1)

T6 Torx Screwdriver (1)

Spanner 2.6 Screwdriver (1)

---

### Step 1 — Disassembling Ericsson CF 388 Battery

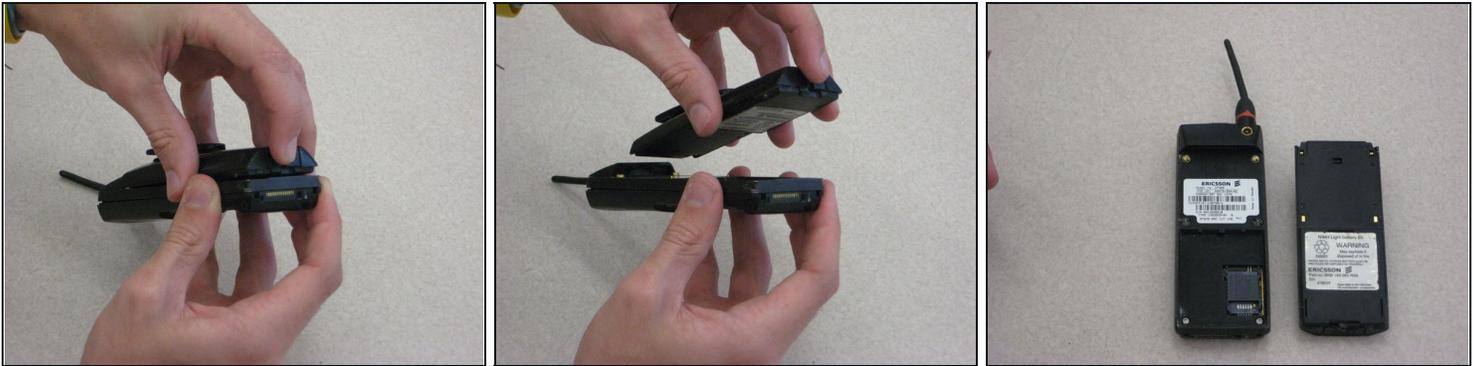

- To remove the battery from the casing, grab the front panel and back panel with opposite hands (as shown). The back panel is the same as the battery.
- With your index finger, push in the button on the bottom of the battery to release it.
- Pull the battery away from the phone.

## Step 2 — Phone Casing



- After removing the battery, the front phone casing becomes accessible.
- Locate the two star-shaped T6 screws on the bottom end of the rear of the phone, underneath the battery, as indicated by the red circles.
- Remove these two screws using the Torx T6 Screwdriver.

## Step 3




- Locate the top two U-shaped screws on the back of the phone, as shown by the red circles.
  - Remove these two screws with a SP 2.6 screw driver.
- ⓘ Note: Remove gray plastic grommets with screws.

## Step 4



- Grab opposite panels of the phone casing and carefully open and pull apart the phone, as shown in the image.
- ⓘ Note: Be careful not to damage the circuit board and components as you as open the casing.

## Step 5 — Circuit Board

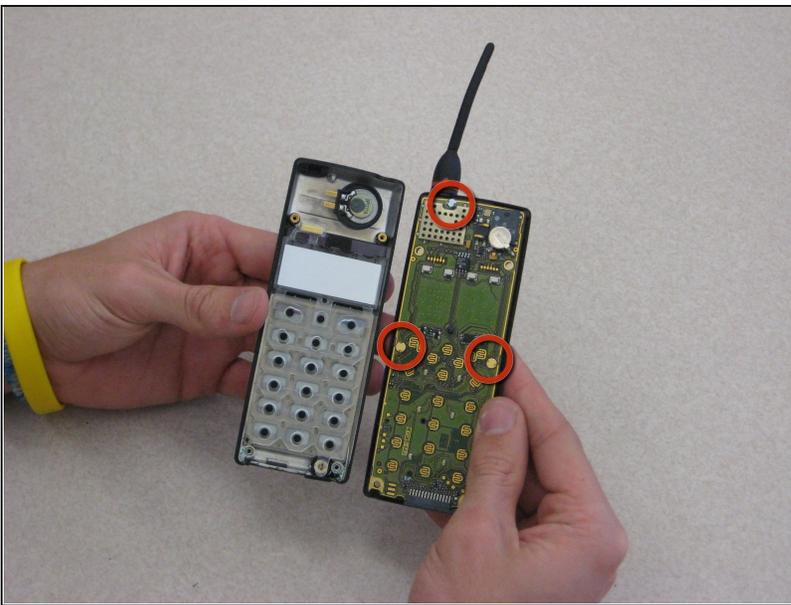

- Locate the circuit board on the rear side of the front phone casing (right side of image).
- Locate the mounting screws (indicated by red circles), which attach the board to the rear side of the front phone casing.

## Step 6




- Using the SP2.6 u-shaped screw driver in one hand, loosen and remove both center screws. Hold the back part of the screw with the metal [tweezers](#).

## Step 7





- Completely remove the two center screw as shown.
- ⓘ Note: the hand not holding the screw driver is holding the back part of the screw and the panel in place.

## Step 8

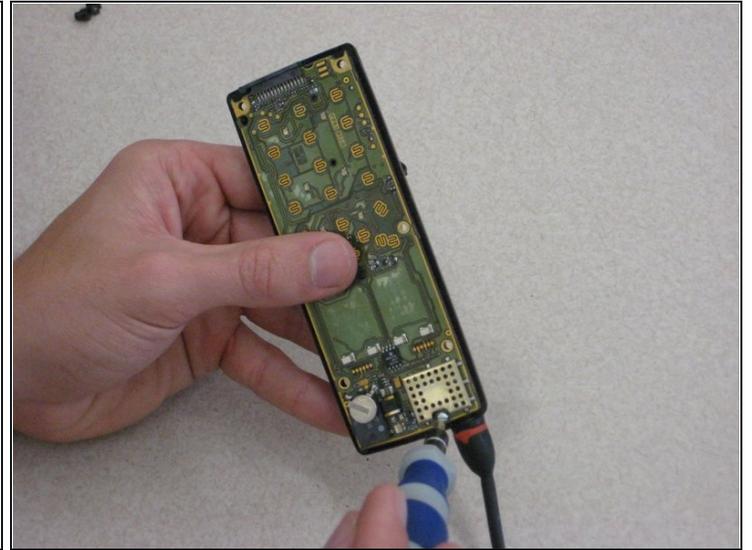

- Locate the final screw at the top of the phone near the antenna, as shown by the red circle.
- Using the U-shaped screw driver, remove the top screw.

## Step 9

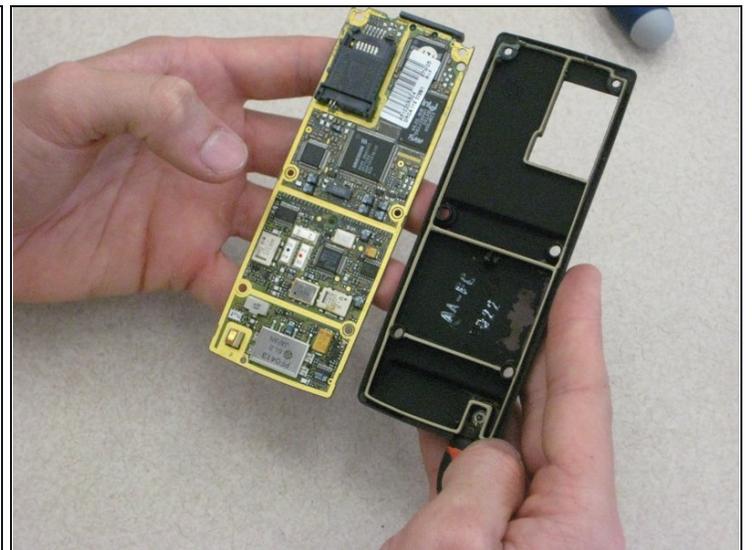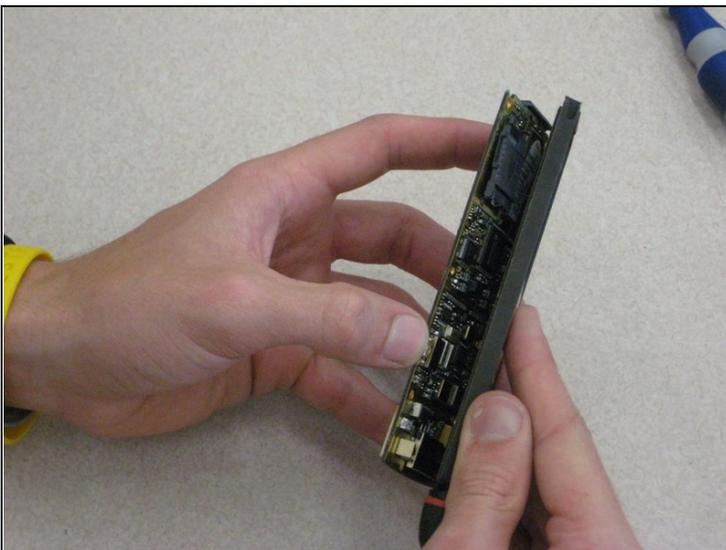

- With one hand on the circuit board and one hand on the phone casing, carefully pull apart the circuit board from the front panel casing.

---

To reassemble your device, follow these instructions in reverse order.