

Dell Vostro 1400 Screen Replacement

This guide will show you the proper steps to...

Written By: David Hogg



INTRODUCTION

This guide will show you the proper steps to replace your screen on your Dell Vostro 1400



iFixit Opening Tool (1)

Step 1 — Battery



- A Be sure the power is off and all cables are unplugged from the device before starting.
- After flipping over the laptop, the battery is on the bottom side of the laptop.
- Find the tabs on both the left and right side of the battery.



 Push tabs toward the outside of the laptop until they lock in place.

Step 3






• Push the battery forward to eject it from the laptop.

Step 4 — Screen



- ⚠ Please make sure your device is completely turned off and everything is unplugged from the device
- Open the laptop.

Step 5

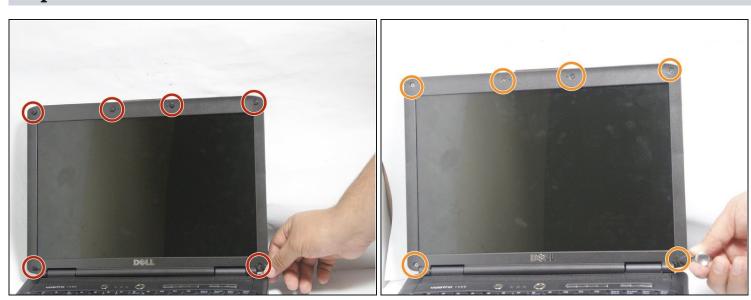

- Remove the 6 screw hole covers surrounding the screen.
 - Remove the 6 screws that were underneath the screw covers.



- Carefully remove the plastic surrounding the screen by pulling off, starting at the bottom.
- Remove the two (2.5mm x 5mm) screws at the top, by the camera.

Step 7



- Remove the two 5mm screws from the camera above the screen.
- Remove the two 5mm screws from the bottom of the screen.





• Carefully remove the screen from the back cover.

Step 9






- Lift up the black tag holding the camera and cable together.
- Unplug the camera from the cable.



• Unplug the two cables connected to the screen.

Step 11

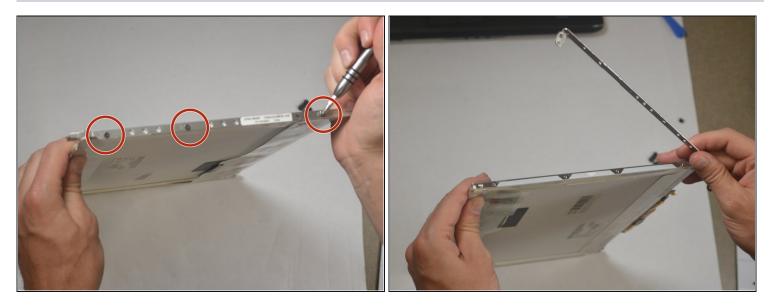

- Remove the six 3mm screws on each side of the screen.
- Remove the railing on each side of the screen.
- (i) The railing will be marked "L" for left side or "R" for the right. This should assist in reassembly.

To reassemble your device, follow these instructions in reverse order.