




Bowers and Wilkins T7 Speaker Driver Replacement

Replace your broken or blown out speaker drivers.

Written By: Oluwagbemisola Aderibigbe

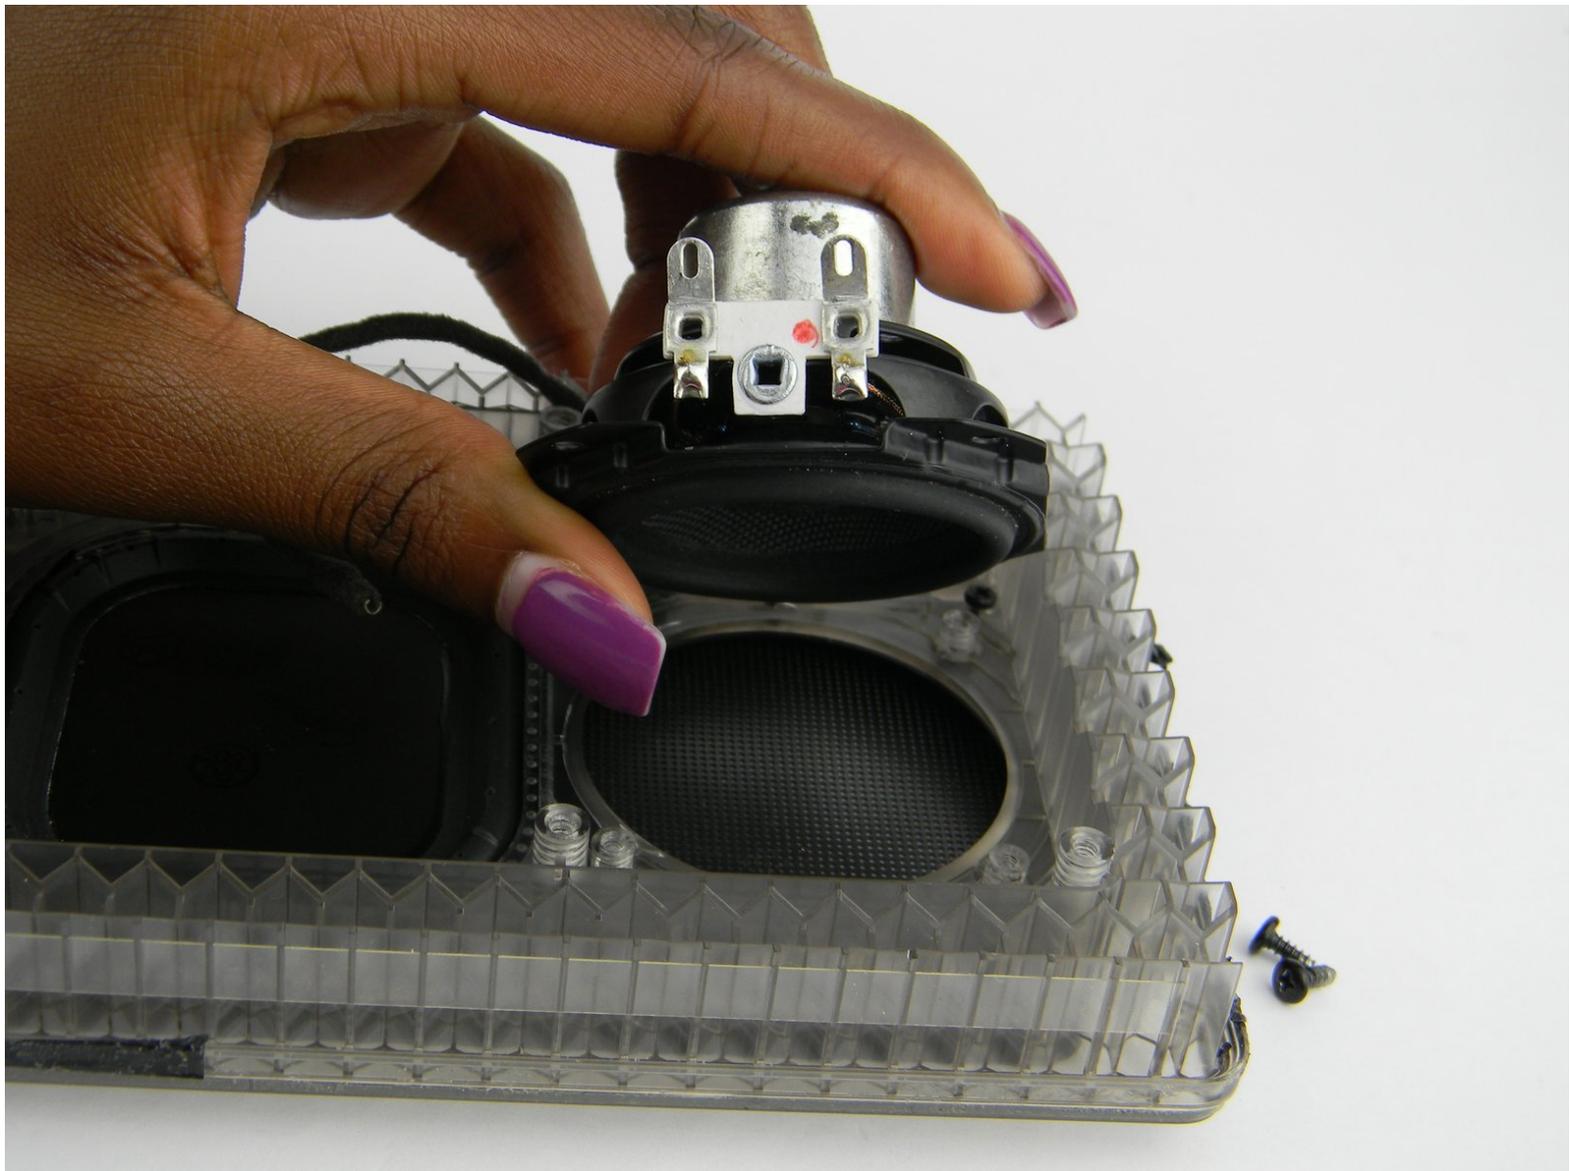

INTRODUCTION

Use this guide to learn how to replace your left and right speaker drivers for the Bowers and Wilkins T7 Bluetooth Speaker.

TOOLS:

- [JIS Driver Set](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Access Panel




- ⚠️ As with all electronic devices, make sure your device is powered off before you begin.
- Gently lift up the access panel; it should easily "pop" open.

Step 2





- Remove 14mm screws on the front panel with a J1 Phillips head screwdriver.
- There are 8 screws in total.

Step 3

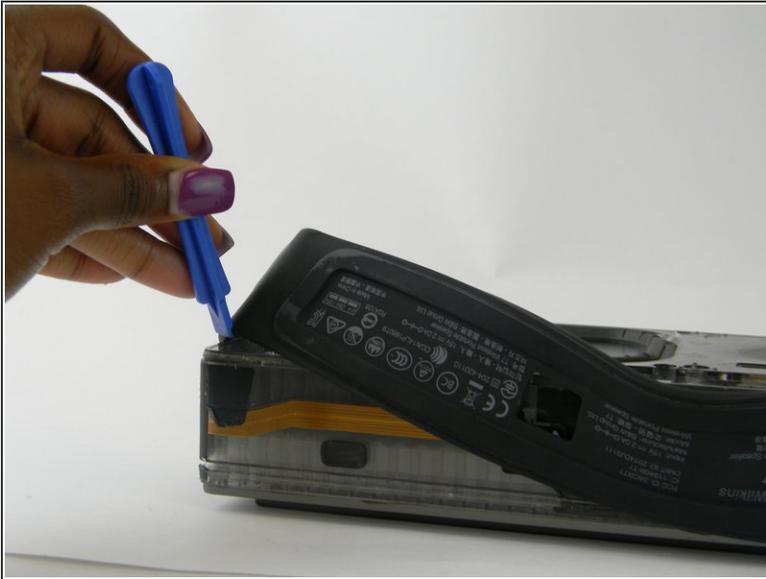

-  Be gentle, the rubber seal is fragile and easy to tear, resulting in cosmetic damage to your device.
- Using the iFixit Opening Tool, carefully pry off the rubber seal around the sides.
-  The seal is held by adhesive, if this is proving difficult you can use a heat gun to help the process.

Step 4

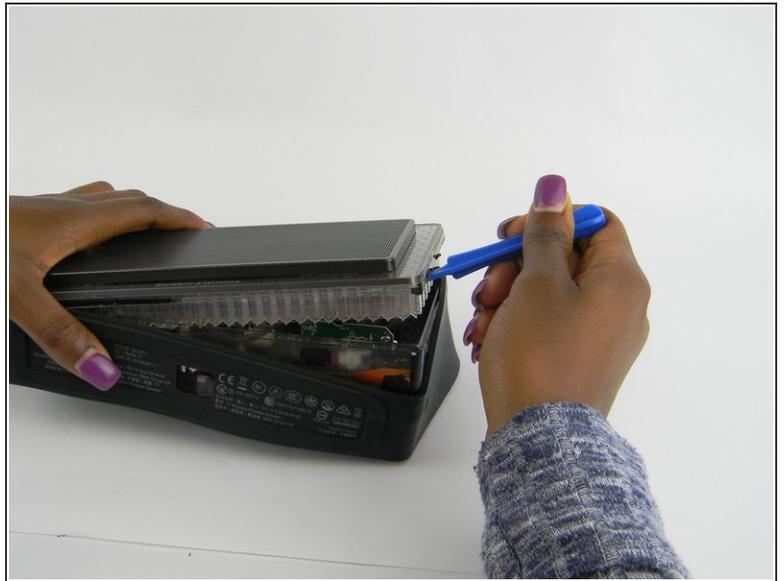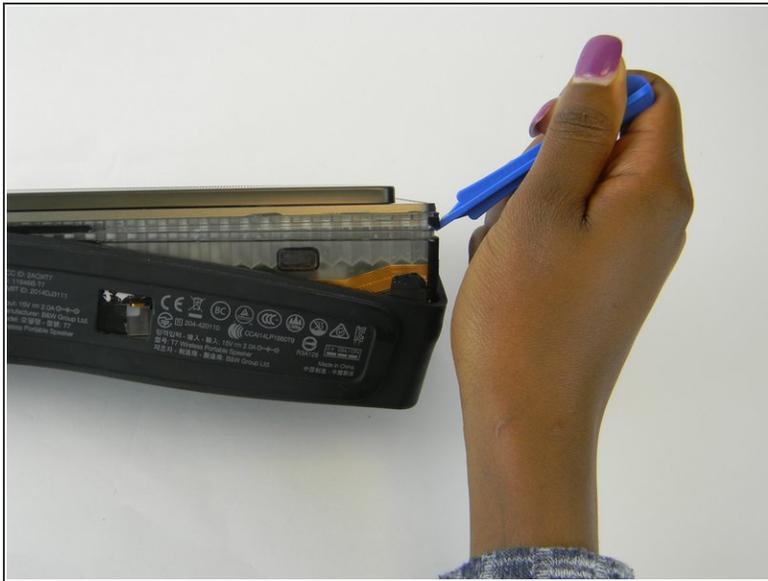

- i** The cover is the most difficult part to remove. As you work, pry continuously, moving the tool around the device, working it a little further as you go.
- Using the iFixit Opening Tool, pry open at the seam found under the rubber seal.
 - As the cover starts to come off, you can lift up using your hand.

Step 5




- Gently squeeze the internal locking mechanism inside the red and white terminals with either your fingers or a pair of precision tweezers.
- While squeezing the internal locking mechanism, pull back the terminal.
- Repeat this process for the second speaker.

Step 6 — Speaker Driver



- Remove the 7mm screws around the speaker using a J100 Phillips head screwdriver.
- There are 4 screws in total around each speaker.

Step 7

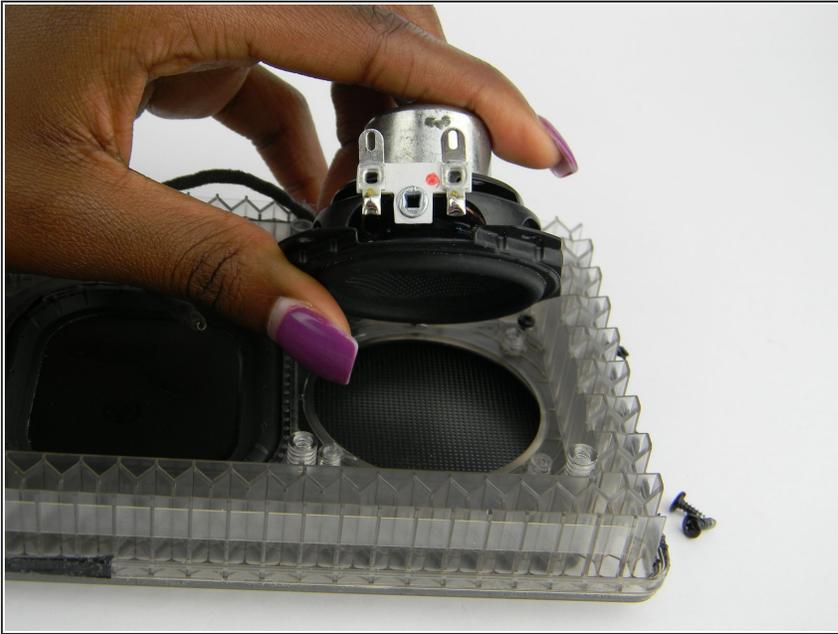

- Now that all the screws are removed, pull straight up on the speaker drive to remove the speaker drive component.

To reassemble your device, follow these instructions in reverse order.